



### DESCRIPTION:

The GT-2H is an audio/video tenant sub-master station for the GT-2C master station. It is equipped with a Talk, Door Release, and optional Service Button. Up to three of the GT-2H sub masters can be added to a GT-2C master giving the tenant station-to-station communication ability. When a visitor calls, the tenant stations ring and video is present. The call is answered by one touch of the Talk button. A handset (GT-HS) can be added to the unit if additional privacy is required. The unit features a 3.5" color LCD monitor and a PTZ control button for the camera.


### GT-2H FEATURES:

- 3.5" LCD color monitor
- Hands-free audio communication
- Optional Handset for privacy (GT-HS)
- Door release button
- Optional Service Button
- PTZ & brightness control
- Call tone volume control
- Communication volume control
- Maximum of 3 stations can be added to a GT-2C master
- Internal communication between the GT-2C master and all 3 GT-2H

# GT-2H

## Sub-master Monitor Station

### FEATURE CALL-OUT:

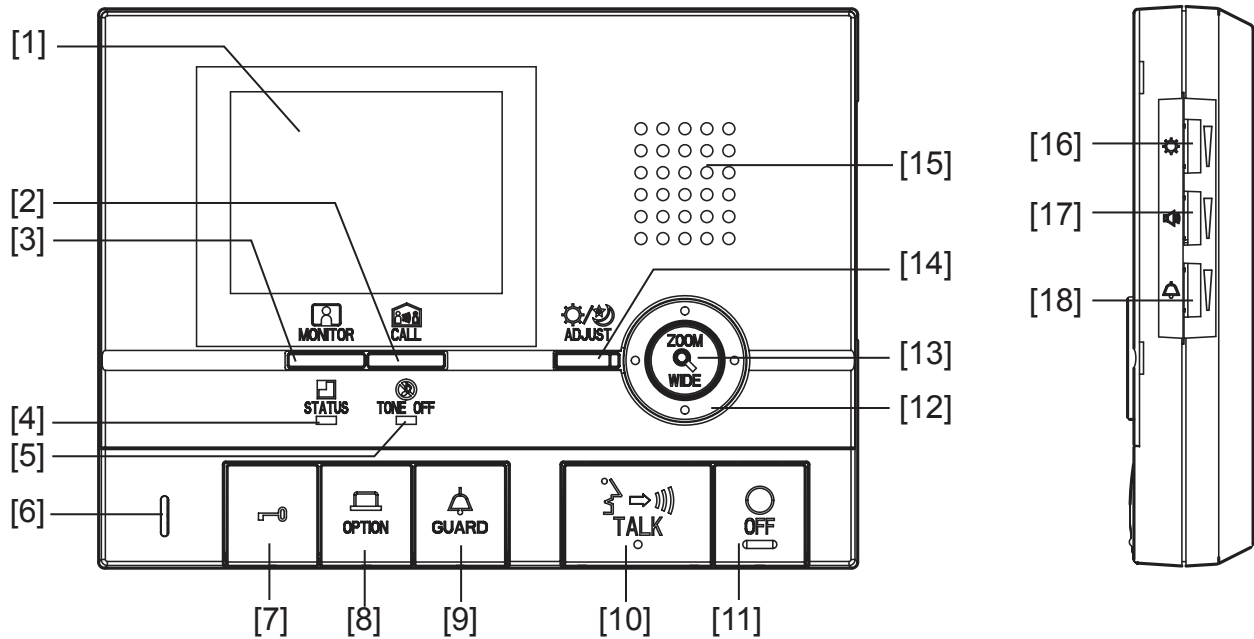

### FEATURE CALL-OUT DEFINITIONS:

- [1] Color LCD video monitor
- [2] CALL button
- [3] MONITOR button
- [4] Status LED (orange)
- [5] Tone Off LED (orange)
- [6] Microphone
- [7] Door Release button
- [8] Option button
- [9] Security Guard Call / Light button
- [10] Talk button w/ Transmit LED
- [11] Off button
- [12] PAN/TILT control button
- [13] ZOOM/WIDE button
- [14] Adjust button
- [15] Speaker
- [16] Screen brightness control (0~10)
- [17] Receive volume control (0~10)
- [18] Call tone volume control (0~10)

### SPECIFICATIONS:

- Power Source: 24V DC, PS-2420UL
- Current consumption: Max 110mA
- Communication: Hands-free or Press-to-talk
- Monitor: 3.5 inch color LCD
- Mounting: Wall mount
- Temperature: 32-104°F (0-40°C)
- Dimensions: 5-1/2" H x 7-1/2" W x 1-1/4" D
- Weight: Approx. 0.97 lbs (440g)