

NEW!
See
reverse

Fan/Fixture Box Kit for Suspended Ceilings

Lower Installed Cost • Heavy-duty Plated Steel



FBR5420SC
Fan/Fixture Box Kit
Patent pending

Designed just for mounting a fan or fixture on a suspended ceiling grid, Arlington's FBR5420SC fan/fixture box kit saves money, and 30 minutes of installation time!

The box/bracket assembly ships with box mounted firmly on-center. There's no need to adjust the box or bracket if the box is installed in the center of a ceiling grid.

There are no parts to lose! FBR5420SC ships fully assembled. Installation screws ship parked in place.

- 2" deep, 20.0 cubic inch box
- Meets new UL standards
- UL rating: 70 lb fan or fixture
CSA: Acceptable for fan support

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description	Box	Unit Pkg	Std Pkg
FBR5420SC	75300	Fan/Fixture Box Kit for Suspended Ceiling	2" deep 20.0 cubic in.	1	5


Kit includes box/bracket assembly with turnbuckle, 12' heavy-duty chain, and (2) "S" hooks.

A  
Arlington

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com

Fan/Fixture Box Kit for Suspended Ceilings

Ships Fully Assembled • Fully Adjustable Mounting Bracket

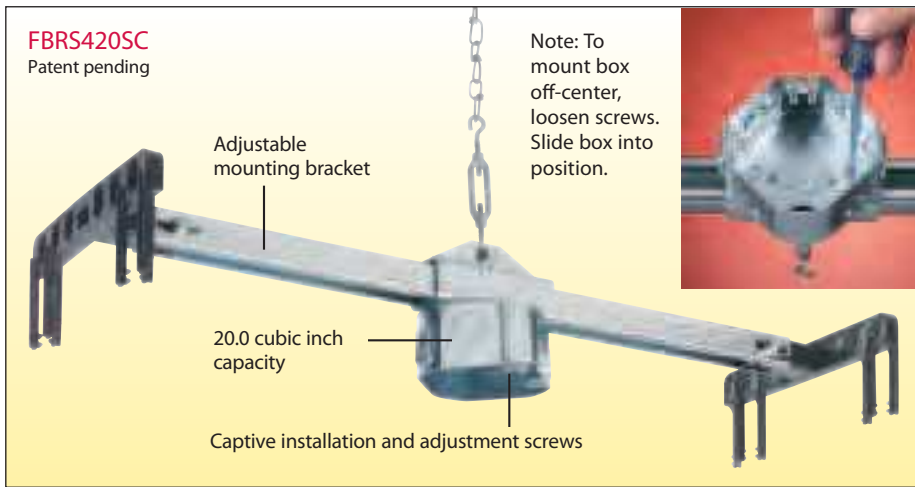

Kit includes box/bracket assembly with turnbuckle, 12' heavy-duty chain, and (2) "S" hooks.



- 1 Cut a 4-1/16" diameter hole in the center of a 24" ceiling tile.




- 2 Place box over hole. Snap plastic ends of support bar over the ceiling grid (tees).



- 3 Use the "S" hooks provided to attach chain to turnbuckle, and chain to the overhead support. Use turnbuckle to apply tension to the chain, so it supports the weight of fan.



- 4 Remove captive screws (shown above). Use them to install the fan or fixture per manufacturer's specifications, NEC and all local electrical codes.

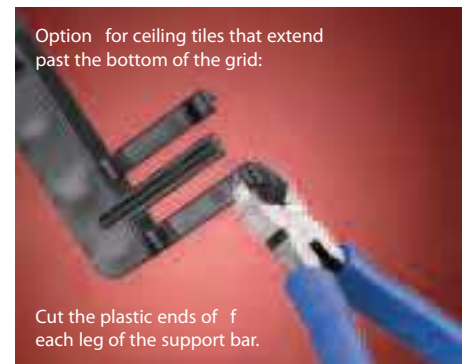

Distributed by



1 Stauffer Industrial Park
Scranton, PA 18517

800/233.4717

Fax 570/562.0646

www.aifittings.com

FBRS420SC 306/50M