



Catalog Number: U5168-XTL-200-KK-PL
Item Description: 200A 4T RL OU MAIN 8CRT
UPC Code: 784572485150

Brand Name: Milbank

Type: Ringless Meter Socket

Special Features: 4 Terminal, Twin Small Closing Plates, Horn Bypass, 7/8 Inch Knockout for Barrel Lock Provision, One 200 Ampere Main Breaker, 8 Branch Circuits

Application: Meter Mounting Base

Standard: UL Listed

Voltage Rating: Up to 240 Volts Alternating Current

Amperage Rating: 200 Ampere Continuous

Phase: 1 Phase

Frequency Rating: 60 Hertz

Cable Entry: Overhead and Underground

Terminal: Lay in Line Side and Single Mechanical Load Side

Mounting: Surface Mount

Enclosure: Type 3R, G90 Galvanized Steel with Powder Coat Finish





Additional Specifications: Line Side Wire Range: 6 AWG - 350 kcmil

Amperage Interrupting Current Rating or Short Circuit Current Rating: Please Contact Factory


5th Terminal Position: 3 O'Clock, 9 O'Clock

Maximum Amperage: 200 Maximum Ampere

Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

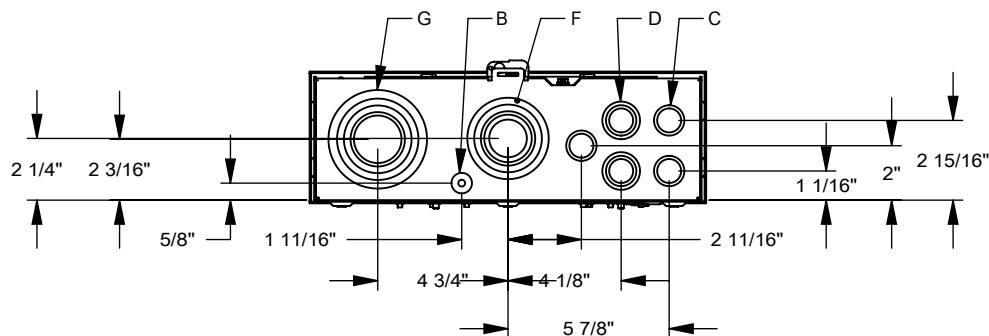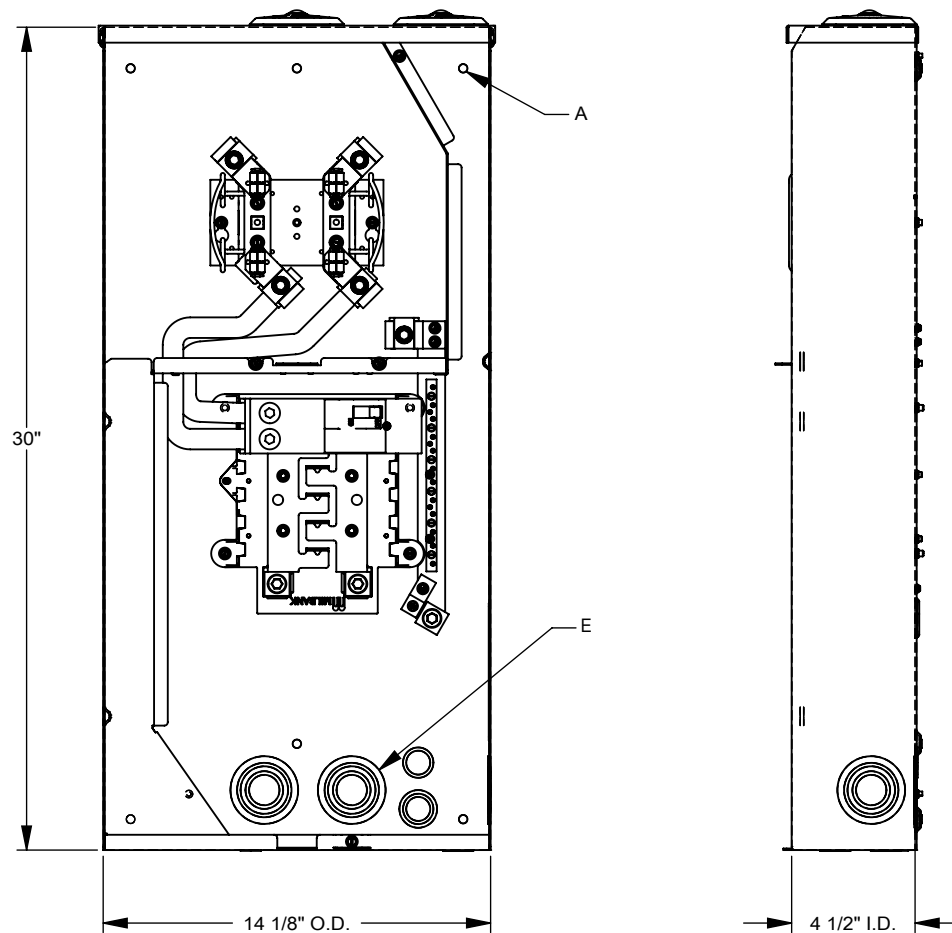

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	1	1/4, 1/2 CONC. K.O.
C	4	1/2, 3/4 CONC. K.O.
D	2	1/2, 3/4, 1 CONC. K.O.
E	3	3/4, 1, 1 1/4, 1 1/2, 2 CONC. K.O.
F	1	1, 1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O.
G	1	1 1/4, 1 1/2, 2, 2 1/2, 3 CONC. K.O.

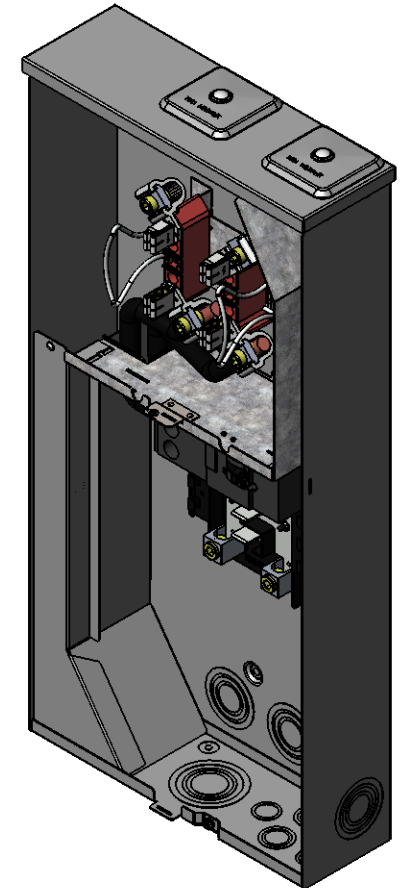

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.
Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.