




U8729-DL-KK-BLG

COLLAPSE PRODUCT IMAGE

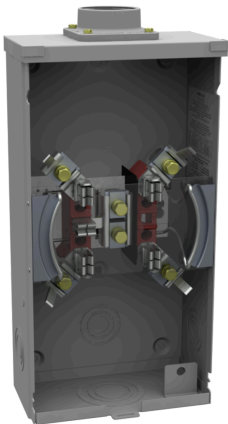

Appears In:

[Consolidated Edison, Orange & Rockland](#)

5 Terminal Ringless 2 In Hub Horn Bypass 7-8 In Barrel Lock Ground With Bracket Provision

SPECIFICATIONS

Brand Name	Milbank
Type	Ringless Meter Socket
Application	Meter Socket
Standard	UL Listed;Type 3R
Voltage Rating	600 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	4.125L x 8W x 15.5H
Number of Main Breakers	0
Main Breaker Size	No Main Breaker
Cable Entry	Overhead
Terminal	Lay in
Insulation	Glass Polyester
Mounting	Surface Mount
Material	G90 Galvanized Steel with Powder Coat Finish
Number of Jaws	5 Terminal
Bypass Provision	Horn Bypass
Number of Meter Positions	1 Position
Equipment Ground	Bonded Neutral
Hub/Closing Plate	2 Inch Hub

SPECIFICATIONS

Line Side Wire Range	6 AWG - 350 kcmil
Load Side Wire Range	6 AWG - 350 kcmil
Barrel Lock Provision	7/8 Inch Knockout and Angle Bracket For Barrel Lock Provision
Number Of Receptacles	0
Height	15.5 IN
Length	4.125 IN
Width	8 IN

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.