


REMOVABLE CAP
TO TIGHTEN SCREW
(REPLACE WHEN COMPLETE)



REMOVABLE CAP
FOR DUAL ENTRY
(INSERT IN OTHER SIDE)

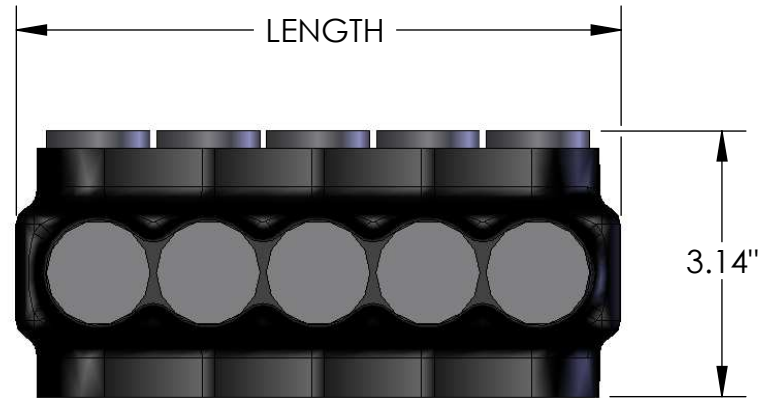

WIRE ENTRY POINT
WIRE RANGE: 600MCM - #6AWG
PRE-FILLED W/ OXIDE INHIBITOR

IPLD600-5 SHOWN

| PART NUMBER | NO. OF PORTS | LENGTH |
|-------------|--------------|--------|
| IPLD600-3 | 3 | 4.47 |
| IPLD600-4 | 4 | 5.77 |
| IPLD600-5 | 5 | 7.07 |
| IPLD600-6 | 6 | 8.37 |
| IPLD600-8 | 8 | 10.97 |



- NOTES:
- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
 - UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
 - DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
 - COLD TEMPERATURE RATED TO -45°C.
 - HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT
 - UV RATED

| | | | |
|--|--|--|--|
| | | POLARIS SALES . CO . INC | |
| <small>PROPRIETARY AND CONFIDENTIAL</small> | | <small>11625 PROSPEROUS DRIVE ODESSA, FL 33556</small> | |
| <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.</small> | | TITLE: INSULATED DUAL ENTRY 600 CONNECTOR | |
| <small>DRAWN BY</small> L. HILL | | <small>DATE</small> 07/25/2014 | |
| <small>MATERIAL:</small> N/A | | <small>DWG. NO.</small> IPLD600- | |
| <small>SCALE:</small> N/A | | <small>SHEET:</small> 1 OF 1 | |