
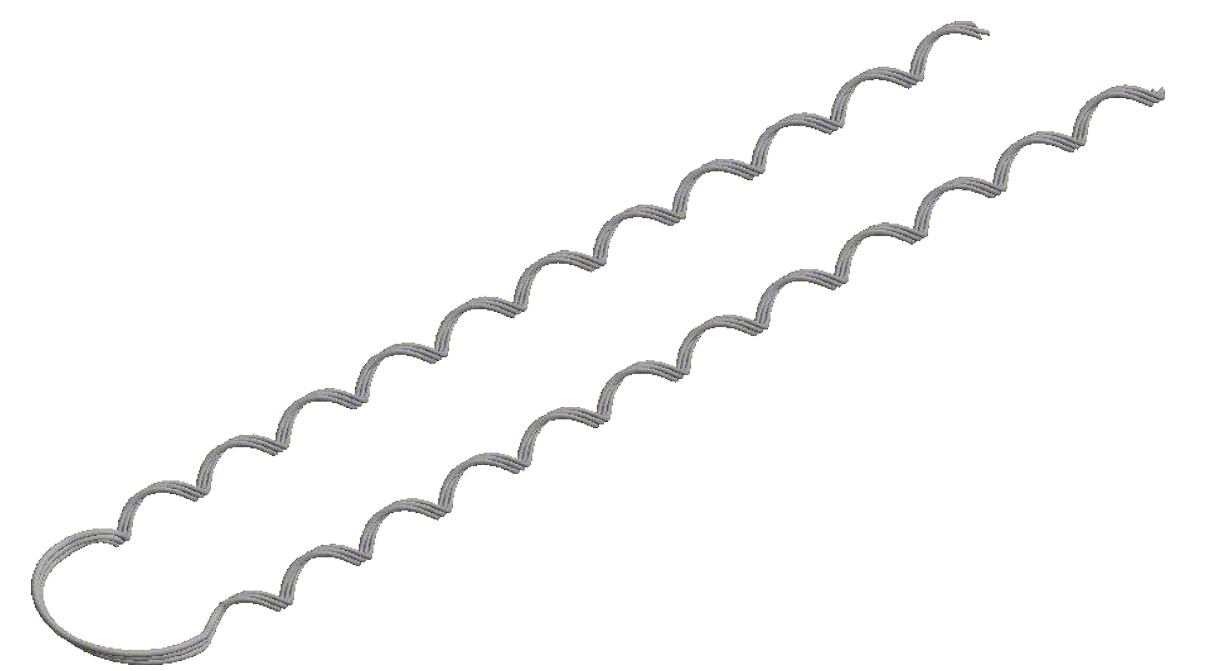


CATALOG NO.	CONDUCTOR SIZE (ACSR)	CONDUCTOR SIZE (AAC)	CONDUCTOR SIZE (AAAC)	CONDUCTOR SIZE (COMP ACSR)	CONDUCTOR SIZE (AWAC)	APPLICATION RANGE	DIM A	DIM B	DIM C	WEIGHT	COLOR	STANDARD PACK
DGFW4554	#6,6/1	#6, 7W	#6, 7W	#6, 6/1	-	0.182 TO 0.203 [4.623 TO 5.16]	16 [406]	14 [356]	1.0 [25.4]	13.400 [6.08]	BLUE	100
DGFW4541	#4,6/1 & #4, 7/1	#4, 7W	#4, 7W	#4, 6/1	#4, 6/1	0.229 TO 0.257 [5.82 TO 6.53]	16.9 [430]	14.9 [379]	1.0 [25.40]	17.900 [8.12]	ORANGE	100
DGFW4542	#4,6/1 & #2, 7/1	#2, 7W	#2, 7W	#2, 6/1	#2, 6/1 & #3, 5/2	0.290 TO 0.325 [7.37 TO 8.26]	24 [610]	22 [559]	1.0 [25.40]	30.600 [13.88]	RED	100
DGFW4543	#1, 6/1	#1, 7W	#1, 7W	#1, 6/1	#1, 6/1	0.326 TO 0.364 [8.28 TO 9.25]	26 [660]	24 [610]	1.0 [25.4]	25.500 [11.57]	GREEN	50
DGFW4544	1/0,6/1	1/0, 7W	1/0, 7W	1/0, 6/1	1/0, 6/1 & #1, 5/2	0.365 TO 0.409 [9.27 TO 10.39]	26.4 [671]	24.4 [620]	1.0 [25.4]	27.200 [12.34]	YELLOW	50
DGFW4545	2/0,6/1	2/0, 7W	2/0, 7W	2/0, 6/1	2/0, 6/1 & 1/0, 5/2	0.410 TO 0.460 [10.41 TO 11.68]	28 [711]	26 [660]	1.0 [25.4]	29.200 [13.25]	BLUE	50
DGFW4546	3/0,6/1	3/0, 7W	3/0, 7W	3/0, 6/1	3/0, 6/1 & 2/0, 5/2	0.461 TO 0.516 [11.71 TO 13.11]	32.5 [825]	30.5 [775]	1.0 [25.4]	21.000 [9.53]	ORANGE	25
DGFW4547	4/0,6/1	4/0, 7W	4/0, 7W	4/0, 6/1	4/0, 6/1 & 3/0, 5/2	0.517 TO 0.577 [13.13 TO 14.66]	34.1 [865]	32.1 [815]	1.0 [25.4]]	60.000 [27.22]	RED	25
DGFW4548	266.8 MCM. 18/1 & 26/7 300 MCM. 18/1	266.8 MCM. 19W & 37W 300 MCM. 19W & 37W	266.8 MCM. 19W	300 MCM. 18/1 336.4 MCM. 18.1	266.8 MCM. 18/1	0.578 TO 0.653 [14.68 TO 16.59]	35 [889]	33 [838]	1.0 [25.4]	34.000 [15.42]	BLACK	25
DGFW4549	300 MCM. 26/7 & 30/7 336 MCM. 18/1, 36/1 & 26/7 397.5 MCM. 36/1	336.4 MCM. 19W & 37W 350 MCM. 19W & 37W 397.5 MCM. 19W & 37W 400 MCM. 19W & 37W	336.4 MCM. 19W	397.5 MCM. 18/1	336.4 MCM. 18/1	0.654 TO 0.739 [16.61 TO 18.77]	38.6 [980]	36.6 [930]	1.0 [25.4]	52.700 [23.90]	GREEN	25

ITEM	DESCRIPTION	MATERIAL
1	DISTRIBUTION GRIP DEAD-END	ALUMINIUM CLAD STEEL

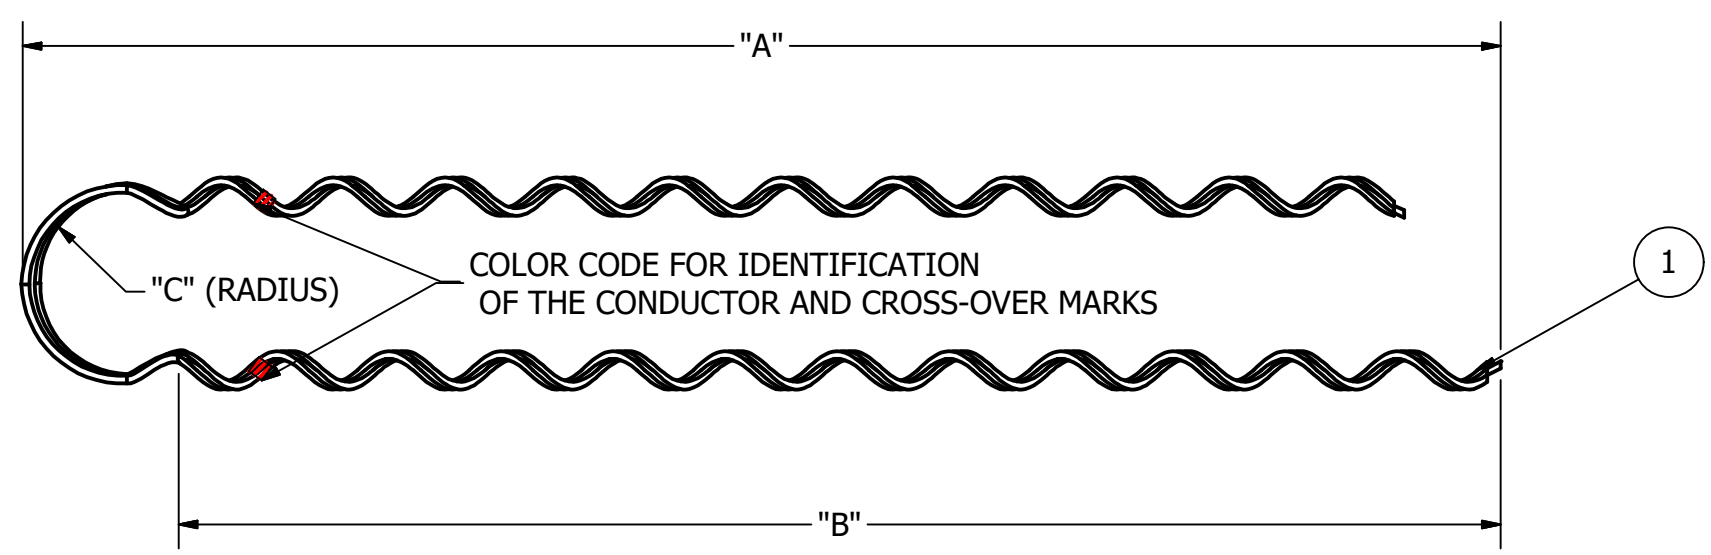

- NOTES:
- ALL DIMENSIONS FOR REFERENCE ONLY. DISTANCE IN. [MM], FORCE LBS. [KN], TORQUE IN. LBS. [N.m], & WEIGHT LBS. [KG].
  - RATINGS:
    - ALL DISTRIBUTION GRIP DEADENDS MUST MEET 60% OF THE WIRE RATED BREAKING STRENGTH (RBS)
  - CERTIFICATIONS, SPECIFICATIONS, & STANDARDS:
    - ALUMINIUM CLAD STEEL PER ASTM B415
  - SUFFIXES & VARIANT CONFIGURATION
    - NA
  - HAND LAY DIRECTION: RIGHT

78862	06/13/19	HD	RG	HPS.	<b>HUBBELL® POWER SYSTEMS</b> <small>POWER SYSTEMS, INC.</small>			
EC #	DATE	CHG BY	RESP ENG					
DESC OF DWG: REDRAWN IN INVENTOR NEW CC-TEMPLATE				CONFIDENTIAL: THIS DRAWING AND ITS CONTACTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS	TITLE <b>DGFW, FORMED WIRE DEADENDS</b>			
REASON (S) FOR CHANGE: DISPOSITION OF MAT'L:					<table border="1"> <tr> <td>SIZE <b>C</b></td> <td>DWG NO. <b>CC-19039</b></td> <td>CAT / PART / ASSY NO. <b>SEE CHART</b></td> <td>REV <b>05</b></td> </tr> </table>	SIZE <b>C</b>	DWG NO. <b>CC-19039</b>	CAT / PART / ASSY NO. <b>SEE CHART</b>
SIZE <b>C</b>	DWG NO. <b>CC-19039</b>	CAT / PART / ASSY NO. <b>SEE CHART</b>	REV <b>05</b>					
DO NOT SCALE THIS DRAWING		DRN BY BAF	DATE 02/25/09	SHEET 1 OF 1				