

MIC Series

13/32" x 1-1/2" 250Vac Pin indicating fast-acting supplemental fuses



250Vac
1 to 15A



32Vac
20 to 30A

Description

Fast-acting supplemental fuse.

Catalog symbol / color code

- MIC - Green (250Vac max 1 to 15A)
- Grey (32Vac max 20 to 30A)

Ratings

Fuse Amp Range	Interrupting Rating at Voltage Rating		Agency Information	
	250 Vac	32 Vac	UL	CSA
1	35A	-	X	-
2 to 3	100A	-	X	-
5 to 10	200A	-	X	-
15	750A	-	X	-
20 to 30	-	10kA	-	-

Electrical characteristics

% of Fuse Rating	Opening Time
110%	Indefinitely
135%	1 hour max.

Agency information

- CE
- UL Listed, Std. 248-14, 1-15A, Guide JDYX, File E19180


Catalog numbers (amps)

MIC-1	MIC-5	MIC-20
MIC-2	MIC-10	MIC-25
MIC-3	MIC-15	MIC-30

Carton quantity

Amps	Qty.
1/10 to 30	10

Dimensions - in (mm)



Features

- Color coded by maximum voltage rating
- Pin indication for visual indication of open fuse condition
- Silver-plated pin for positive, electrical signal activation
- Fiber tube construction
- Nickel-plated bronze endcaps

Typical applications


- Power electronic circuits in which fuse opening must be quickly apparent
- Control circuits
- PLC Circuits

Recommended fuse blocks/fuse holders

Series	Description	Data Sheet #
Blocks		
BMM Series	1-, 2- & 3-Pole modular blocks with optional covers	10235
BM Series	1-, 2- & 3-Pole blocks	1104
3839	4-Pole signaling block	*
Panel Mount Holders		
HPF-C	1-Pole holder	2114
Fuseclips		
1A3400, 5956 & 5960 Series	PCB Fuseclips	2132

* Call Bussmann Application Engineering for details.

Time-current characteristic curves – average melt

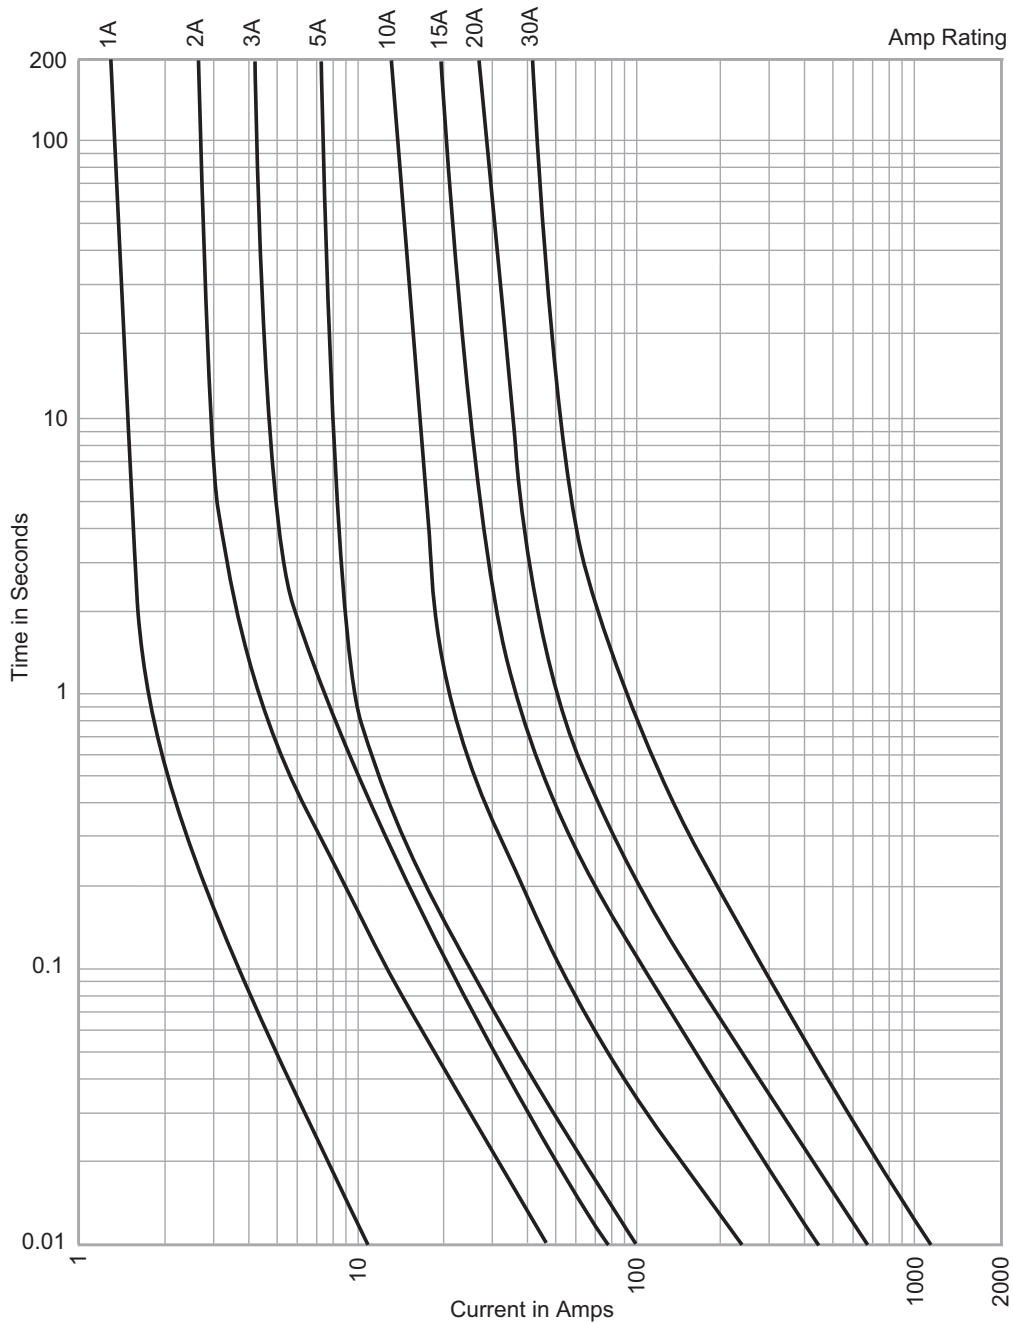

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton's Bussmann Business
 114 Old State Road
 Ellisville, MO 63021
 United States
 www.Bussmann.com

© 2014 Eaton
 All Rights Reserved
 Publication No. 10246 - BU-SB14300
 April 2014

Eaton is a registered trademark.
 All other trademarks are property
 of their respective owners.

