

STAINLESS STEEL T CONDUIT BODY

Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No minimum package qty. required
- Cover and Gasket set included
- Form 8 Style

Certifications and Compliances:

- UL / cUL 514A Listed
- UL File # E307133
- Article 314, “National Electrical Code” (NEC)
- CSA C22.2 No. 18.1
- Canadian Electrical Code (CEC), Part 1, Standard for Electrical Installations
- Approved for wet locations

Materials:


- Body - 316SS
- Cover and Screws - 316SS
- Gasket - Neoprene

Applications:

To connect and change direction of conduit runs. Can be used as pulling fittings. Accessible wiring chamber provides a spacious location to make splices.

Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical
- Pulp & Paper Mills
- Marine & Coastal Facilities

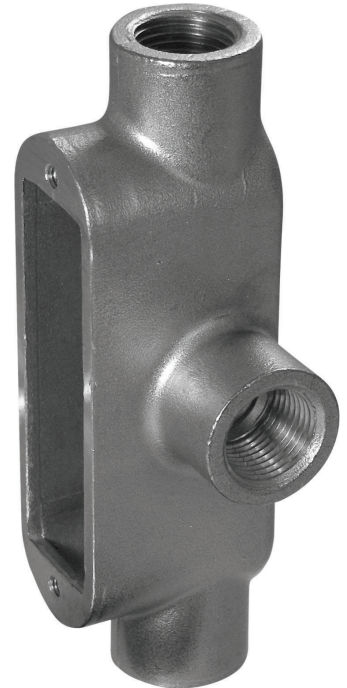

For more info visit atkore.com/calbrite



Part Number	Trade Size (in)	A (in)	B (in)	C (in)	a (in)	Cubic Inches (in)	Weight each per (lb)
S60500TE00	½	5.940	2.132	2.030	4.320	5	1.280
S60700TE00	¾	6.538	2.474	2.320	4.940	9	1.890
S61000TE00	1	7.488	2.735	2.330	5.688	13	2.500
S61200TE00	1¼	8.730	3.280	2.900	6.600	24	3.500
S61500TE00	1½	9.923	3.585	3.000	7.810	35	5.000
S62000TE00	2	12.300	4.700	3.880	10.000	77	9.820
S62500TE00	2½	15.290	6.200	4.550	12.000	160	14.320
S63000TE00	3	15.330	6.280	4.520	12.000	177	15.000
S64000TE00	4	18.340	7.610	5.930	14.630	382	30.000

All dimensions are for informational purposes only *Tolerances +/- 5%

