



PowerMark Gold^{*} Load Centers

24-42 Circuits, Outdoor

- Side hinged doors
 - 14" width
 - Top/bottom feed, plus field convertibility add versatility
 - Increased number of knockouts on endwall
 - 4" hub top wall opening
 - Neutral screws shipped in the backed-out position for fast installation
-
- Single Phase, Three Wire, 120/240 VAC, 22 kAIC rated
 - UL Listed (Panelboards No. 67)
 - Service barriers included for factory installed main circuit breaker
 - 60°C/75°C conductor rating
 - Suitable for use as Service Entrance Equipment when installed in accordance with the National Electric Code



PowerMark Gold Load Centers 24-42 Circuits, Outdoor

Technical Data


Convertible Top/Bottom Feed

Main Ampere Rating	Maximum Spaces					Main Style (Factory Installed)	Catalog Number	Main Wire Size (AWG/kcmil) Cu-Al	Equipment Ground Kit (Order Separately)	Box Number
	1 Pole	2 Pole	1 Pole	2 Pole	Total 1 Pole Spaces					
	1" THQL		1/2" THQP							
125	24	12	0	0	24	Main Lug	TLM2412RCU	6-2/0	TGK24 & TGK32	R4A
						Main Breaker	TM2412RCU			R4
150	24	12	12	4	30	Main Lug	TLM2415RCU	1-3/0 Cu, 2/0-3/0 Al	TGK24 & TGK32	R6A
						Main Breaker	TM2415RCU			R6
	24	12	36	18	42	Main Breaker	TM2415R42	1-250 Cu, 2/0-250 Al	TGK24	R39
	32	16	0	0	32	Main Breaker	TM3215RCU		TGK32	R7
200	24	12	36	18	42	Main Lug	TLM2420R42	1-250 Cu, 2/0-250 Al	TGK24	R39
						Main Breaker	TM2420R42			
	32	16	16	8	40	Main Lug	TLM3220RCU	1-250 Cu, 2/0-250 Al	TGK32	R7A
						Main Breaker	TM3220RCU			R7
	40	20	0	0	40	Main Lug	TLM4020RCU	1-250 Cu, 2/0-250 Al	TGK42	R8A
						Main Breaker	TM4020RCU			R8
225	42	20	0	0	42	Main Lug	TLM4222RCU	1-300 Cu, 2/0-300 Al	TGK42	R8A
						Main Breaker	TM4222RCU			R8

All units shipped in bottom feed configuration.

Dimensions (in.)

Box	Width (W)	Height (H)	Depth (D)
R4A	14 11/16	30 3/16	5 1/4
R4	14	33 3/16	4 5/8
R6A	13	33	5
R6	14	33 7/16	4 5/8
R7A	14 11/16	34 3/16	5 1/4
R7	14	39 3/16	4 5/8
R8A	14 21/32	43 1/4	6 13/32
R8	14	43 11/16	5 3/4
R39	14	31 11/16	4 5/8

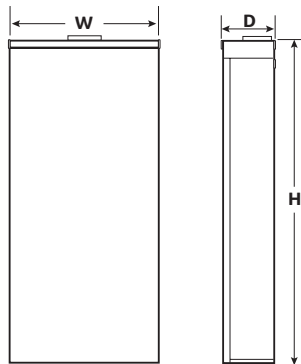

4" Base Universal Hubs

Conduit Opening (inches)	Catalog Number
2	TCU27
2 1/2	TCU28
3	TCU30
3 1/2	TCU35
4 ¹	TCU40
4" Cover Plate	TCUP

¹For 40 and 42 circuit units in R8 boxes only.

GE Energy Connections
41 Woodford Avenue
Plainville, CT 06062
1-800-431-7867
www.geindustrial.com

*Indicates a trademark of the General Electric Company and/or its affiliates.
Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.
©2016, General Electric Company and/or its affiliates. All rights reserved.
12.16 DET-726B