




Auxiliary contact block 1NO or 1NC
For use on Class LC lighting contactors




Image is representative and may not depict the actual product.

General technical data:	
Weight	.020 lb
Height x Width x Depth	39 x 27 x 10 mm
Finger-safe	Yes
Maximum altitude	6560 ft
Ambient storage temperature	(-30 to 65)°C / (-22 to 149)°F
Ambient operating temperature	(-25 to 40)°C / (-13 to 104)°F
Humidity (% non-condensing)	(no data)
Rated impulse voltage resistance	(no data)
Rated insulation voltage	(no data)
Country of origin	Poland
Number of NC contacts	1 if mounted on right side of contactor
Number of NO contacts	1 if mounted on left side of contactor
Operating Current at A600:	
Continuous current	10A
120 VAC	60A Make / 6A Break
240 VAC	30A Make / 3A Break
480 VAC	15A Make / 1.5A Break
600 VAC	12A Make / 1.2A Break
Voltamperes	7200 Make / 720 Break
Operating Current at DC Volts:	
Continuous current	(no data)
Mounting/wiring:	
Mounting orientation	Side
Mounting type	Snap-on mounting
Connection type / torque	Screw / 7-12 in-lb
Solid & stranded conductors	2x(22-12 AWG) CU 75°C
Certificates/approvals:	
Additional information:	
Instruction Sheet	

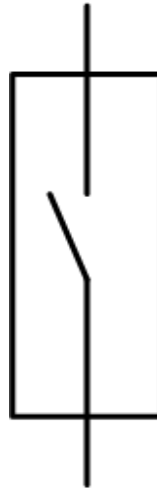

1 NO

(if mounted on left
side of contactor)

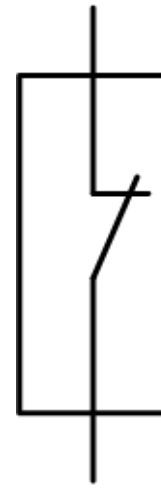

1 NC

(if mounted on right
side of contactor)