
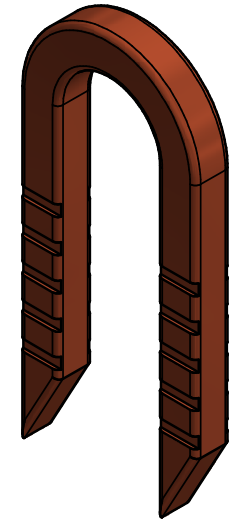


-NOTES-

1. HOTDIP GALV. ANSI/ASTM A 153-73 .001445 MINIMUM THICKNESS.
2. GALV. WIRE 1008 COLD ROLL. COPPER COATED 1008 COLD ROLL HARD DROWN COPPER CLAD WIRE PER ASTM B-227.

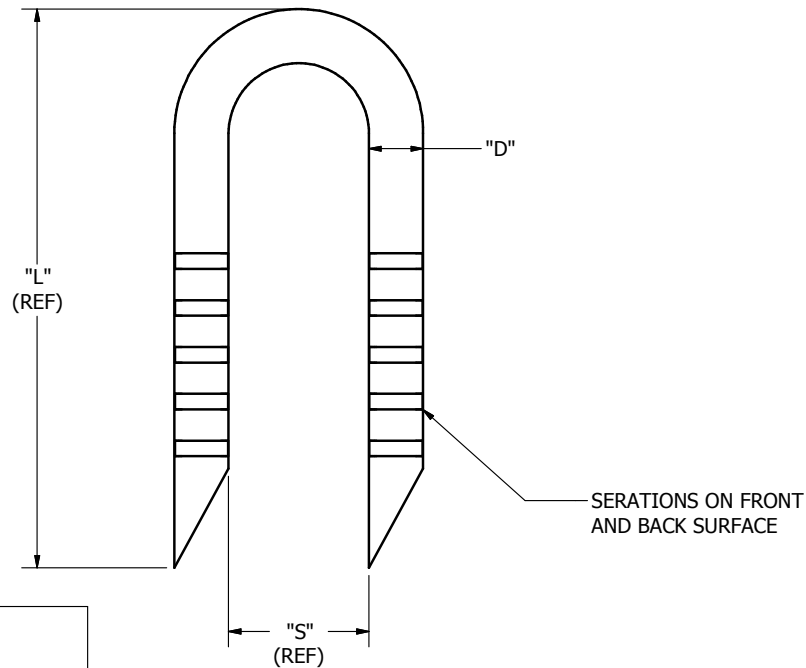

CHANCE CATALOG NUMBER	DESCRIPTION			FINISH	PACKAGING
	"L"	"S"	"D"		
C2050460	1.5	3/8	.13	SEE NOTE-1	350 PCS/BOX, 5 BOX/CARTON
C2050461	2.0	3/8	.13	SEE NOTE-1	260 PCS/BOX, 5 BOX/CARTON
C2050462	3.0	1-1/16	7/32	SEE NOTE-1	60 PCS/BOX, 5 BOX/CARTON
C2050463	2.0	5/8	.16	SEE NOTE-1	160 PCS/BOX, 5 BOX/CARTON
C2050464	1.5	3/8	.14	SEE NOTE-2	300 PCS/BOX, 5 BOX/CARTON
PSC2050599	2.25	1-3/16	.218	SEE NOTE-1	70 PCS/BOX, 5 BOX/CARTON

CHANCE TOLERANCE CHART X ± .060 FRAC ± 1/16 ANGLES ± 2° XX ± .030 ADD DRAFT (UNLESS NOTED) XXX ± .005 CASTING 3° FORGINGS 7°	
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS	

 POWER SYSTEMS, INC.		HUBBELL POWER SYSTEMS, Inc.	
TITLE		STAPLES BARBED	
SIZE B	DWG NO. SA205-0460	CAT / PART / ASSY NO. SEE CHART	REV A
DO NOT SCALE THIS DRAWING	DRN BY AH	DATE 1/25/16	SHEET 1- OF -1