


TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET WITH CONVENTIONAL SPOUT AND FLEXIBLE UNDERBODY



6500.270 Shown

MODEL NUMBER:

- ❑ **6500.270 Widespread Lavatory**
 Flexible underbody for installation on 6" - 12" centers. 1.5 gpm Pressure compensating aerator. Vandal-resistant wrist blade handles. Less drain and pop-up hole.
- ❑ **6500.275 Widespread Lavatory**
 Flexible underbody for installation on 6" - 12" centers. 0.5 gpm Pressure compensating multi-laminar spray. Vandal-resistant wrist blade handles. Less drain and pop-up hole.

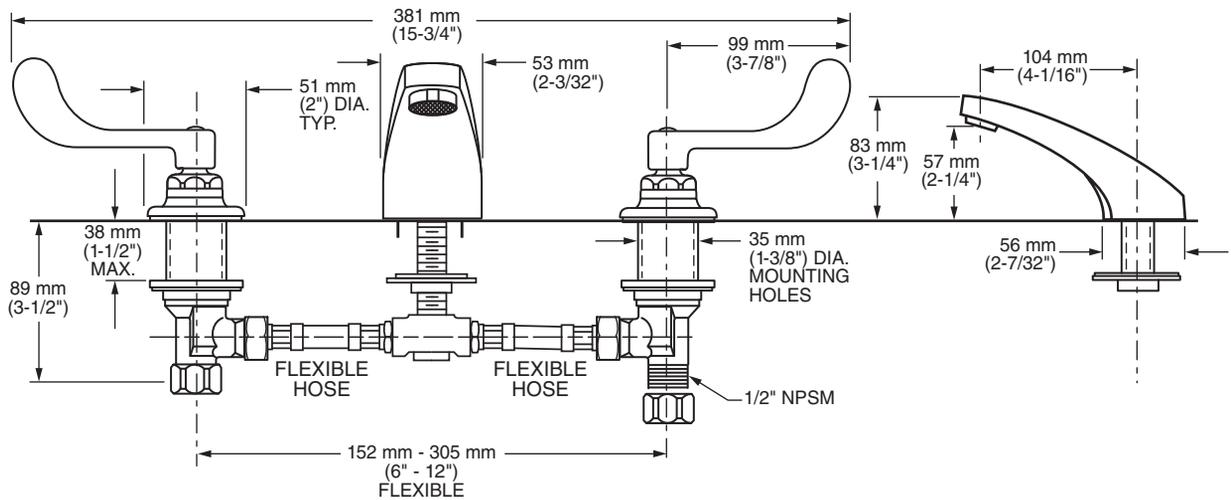

GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with flexible underbody for installation on 6" - 12" centers. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Vandal-Resistant Wrist Blade or Lever handles with blue & red color indexes.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow throughout the pressure range.

Solid Brass Construction: Durable. Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assure a lifetime of drip-free performance.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION

Two handle widespread lavatory faucet shall feature cast brass valve bodies with flexible underbody for installation on 6" - 12" centers. Shall feature water-conserving pressure compensating outlet. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 6500.27_.002.




MONTERREY®
TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET
WITH CONVENTIONAL SPOUT AND FLEXIBLE UNDERBODY

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF 372**

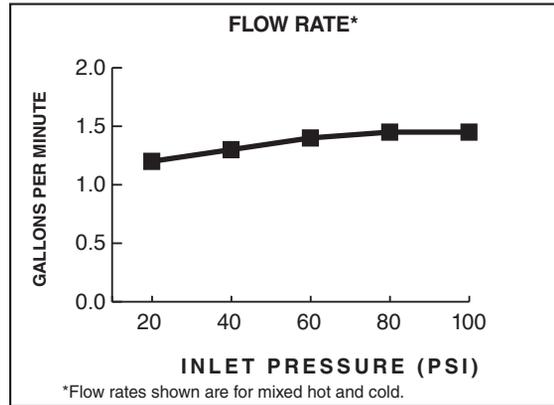

Product Number	Description	Finish
		Polished Chrome
		002
6500.270	Widespread Lavatory. Flexible underbody for installation on 6" - 12" centers. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-resistant wrist blade handles. Less drain and pop-up hole.	
6500.275	Widespread Lavatory. Flexible underbody for installation on 6" - 12" centers. 0.5 gpm/1.9 L/min pressure compensating multi-laminar spray. Vandal-resistant wrist blade handles. Less drain and pop-up hole.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:	
Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
V05*	0.5 gpm (1.9 Lpm) Vandal-Resistant PCA Multi-Laminar Spray
V035*	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Multi-Laminar Spray

*PCA - Pressure Compensating
 All modifications meet CALGreen Code