

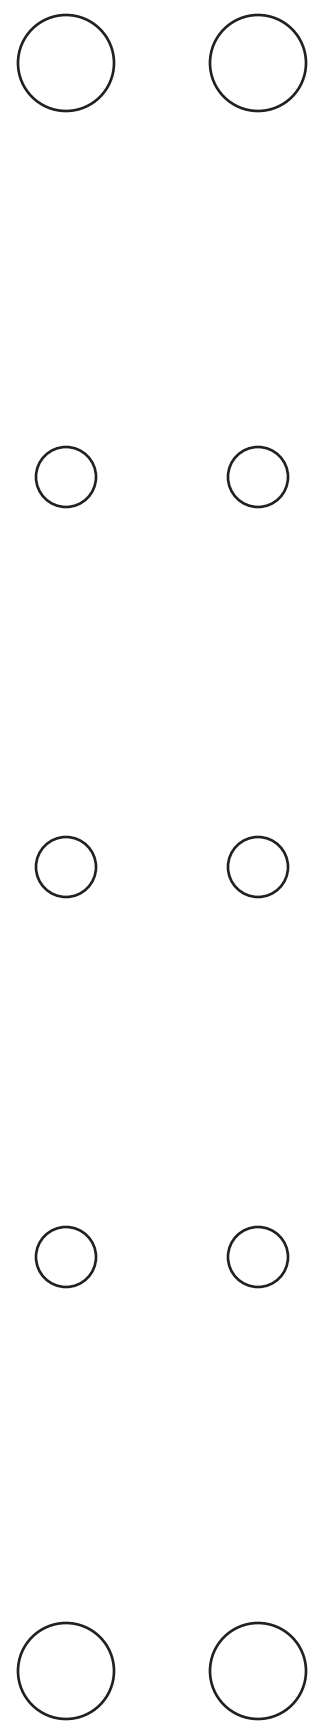

SDS MAX ONE-PIECE CORE BITS

Diameter	Depth	Part No.
1-1/2"	11-3/8"	48-20-5400
1-1/2"	22"	48-20-5402
1-3/4"	11-3/8"	48-20-5404
1-3/4"	22"	48-20-5406
2"	11-3/8"	48-20-5408
2"	22"	48-20-5410
2-5/8"	11-3/8"	48-20-5412
2-5/8"	22"	48-20-5414
3-1/8"	11-3/8"	48-20-5420

Diameter	Depth	Part No.
3-1/8"	22"	48-20-5422
3-9/16"	11-3/8"	48-20-5428
3-9/16"	22"	48-20-5430
4"	11-3/8"	48-20-5432
4"	22"	48-20-5434
5"	11-3/8"	48-20-5436
5"	22"	48-20-5438
6"	22"	48-20-5440

SDS MAX ONE-PIECE CORE BIT ACCESSORIES

Description	Part No.
Centering Bit	48-20-5495
Drift Key	48-20-5497


SDS MAX & SPLINE
SDS MAX & SPLINE TWO-PIECE CORE BITS
OVERVIEW

MILWAUKEE's SDS Max and Spline Thick Wall Core Bits are used for drilling large through holes into brick, block and concrete. Two-piece design allows versatility between SDS Max and Spline shanks and extensions.


FEATURES

- Available in Thick and Thin Wall versions
- Two-Piece Design: Versatility
- Ability to use extensions

THICK WALL SDS MAX & SPLINE TWO-PIECE CORE BITS

Size	Depth	Core Body with Guide Plate and Centering Pin Part No.	12" SDS Max Adapter Shank Part No.	18" SDS Max Adapter Shank Part No.	12" Spline Adapter Shank Part No.	18" Spline Adapter Shank Part No.	7-1/2" Extension Part No.	Replacement Guide Plate Part No.	Replacement Centering Pin Part No.
1-1/2"	4-1/16"	48-20-5125	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5168	48-20-5199
1-3/4"	4-1/16"	48-20-5130	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5169	48-20-5199
2"	4-1/16"	48-20-5135	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5170	48-20-5199
2-1/2"	4-1/16"	48-20-5140	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5171	48-20-5199
3"	4-1/16"	48-20-5145	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5172	48-20-5199
3-1/2"	4-1/16"	48-20-5150	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5173	48-20-5199
4"	4-1/16"	48-20-5155	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5174	48-20-5199
5"	4-1/16"	48-20-5160	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5175	48-20-5199
6"	4-1/16"	48-20-5165	48-03-3572	48-03-3573	48-03-3564	48-03-3565	48-95-6085	48-20-5176	48-20-5199

THIN WALL SDS MAX & SPLINE TWO-PIECE CORE BITS

Size	Depth	Core Body with Guide Plate and Centering Pin Part No.	12" SDS Max Adapter Shank Part No.	18" SDS Max Adapter Shank Part No.	12" Spline Adapter Shank Part No.	18" Spline Adapter Shank Part No.	7-1/2" Extension Part No.	Replacement Guide Plate Part No.	Replacement Centering Pin Part No.
5"	2-13/16"	48-20-5060	48-03-3574	-	48-03-3540	-	48-95-6075	48-20-6162	48-20-6155
6"	2-13/16"	48-20-5065	48-03-3574	-	48-03-3540	-	48-95-6075	48-20-6163	48-20-6155

SDS MAX TUNNEL BITS
OVERVIEW

MILWAUKEE® SDS Max Tunnel Bits are ideal for drilling deep, large holes in brick, block and concrete with SDS Max rotary hammers. The fluted head design and 22" long shaft allows for continuous deep hole drilling without the need to clear out a core. To deliver increased durability in concrete with rebar, a large 3-Cutter tip avoids lock up in rebar. Aggressive carbide cutting edges shear through the rebar inside of concrete.

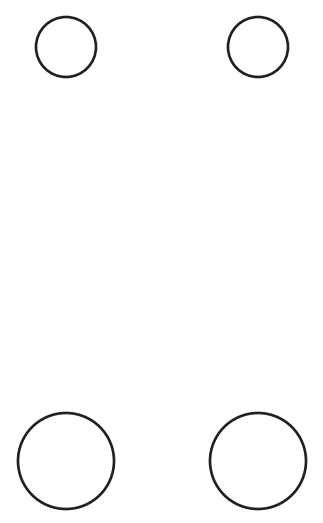
FEATURES

- Fluted Design: Continuous deep hole drilling without the need to remove a core
- 3-Cutter Carbide Centering Tip: Avoids lock up in rebar
- Aggressive Carbide Cutting Edges: Shear through rebar in concrete


SDS MAX TUNNEL BITS

Diameter	Length	Part No.
1-1/2"	22"	48-20-5302
1-3/4"	22"	48-20-5306
2-1/8"	22"	48-20-5312

Diameter	Length	Part No.
2-1/2"	22"	48-20-5318
3-1/8"	22"	48-20-5324



CONCRETE DRILLING & CHISELING

CONCRETE DRILLING & CHISELING