


**SKU:** HT-5

**UPC:** 0783669461305

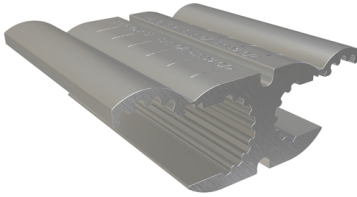

**Features & Benefits:**

**Description:** Aluminum Compression Tap Connector, Dual Rated, Main Conductor Range 4/0-3/0, Tap Range 2/0-1/0, CSA

## Specs

### Additional Class Attributes

|                         |      |
|-------------------------|------|
| Barrel Marking          | Hard |
| Fixing Type             | NA   |
| ILSCOs Die Index Number | D3   |
| Replacement Part(s)     | NA   |

### Dimensions

|                |         |
|----------------|---------|
| Height (IN)    | 2.375   |
| Height BX (IN) | 5.5     |
| Height (mm)    | 60.325  |
| Length (IN)    | 0.987   |
| Length (mm)    | 25.0698 |
| Weight (LB)    | 0.176   |
| Width (IN)     | 2.25    |
| Width BX (IN)  | 3.5625  |
| Width (mm)     | 57.15   |

### Material and Finish

|                    |          |
|--------------------|----------|
| Conductor Material | Aluminum |
| Connector Finish   | NA       |
| Insulation         | NA       |
| Material           | Aluminum |

### Additional Technical Specifications

|                |          |
|----------------|----------|
| Conductor Type | Stranded |
|----------------|----------|

### General

|                             |                 |
|-----------------------------|-----------------|
| Bag Quantity                | 1               |
| Carton Quantity Description | STD PACK QTY 25 |
| Direct Burial               | No              |
| Dual Rated                  | Yes             |
| NEMA Code                   | S-588-1         |
| UPC Code                    | 78366946130     |

## Bolt and Screw Sizes

|                         |    |
|-------------------------|----|
| Mounting Bolt/Stud Size | NA |
|-------------------------|----|

## Testing Standards

|                   |                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------|
| CSA File Number   | AP-5465                                                                                                             |
| Prop65 Compliance | This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation |
| UL Control Number | NA                                                                                                                  |
| UL File Number    | NA                                                                                                                  |

## Environment and Temperature

|                    |      |
|--------------------|------|
| Temperature Rating | 90°C |
|--------------------|------|

## Color

|            |        |
|------------|--------|
| Color      | Silver |
| Color Code | NA     |

## Voltage

|                           |       |
|---------------------------|-------|
| Voltage Rating            | 35 kV |
| Voltage Rating with cover | NA    |

## Conductor Ranges

|                                                        |                     |
|--------------------------------------------------------|---------------------|
| Conductor Range ACSR (Secondary, tap, load)            | 4/0 ACSR - 3/0 ACSR |
| Conductor Range ACSR (primary, run, main, line)        | 2/0 ACSR - 1/0 ACSR |
| Conductor Range AL Solid (Secondary, tap, load)        | NA                  |
| Conductor Range AL Stranded (Primary, run, main, line) | 4/0 Str - 3/0 Str   |
| Conductor Range AL Stranded (Secondary, tap, load)     | 2/0 Str - 1/0 Str   |
| Conductor Range CU Solid (Primary, run, main, line)    | NA                  |
| Conductor Range CU Solid (Secondary, tap, load)        | NA                  |
| Conductor Range CU Stranded (Primary, run, main, line) | 4/0 Str - 3/0 Str   |
| Conductor Range CU Stranded (Secondary, tap, load)     | 2/0 Str - 1/0 Str   |
| Conductor Range AL Solid (Primary, run, main, line)    | NA                  |