

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]
PM2-3F*	--	M3	.63 [16,0]	.23 [5,8]	.22 [5,6]	.49 [12,5]	.13 [3,3]
P14-6F	#6	M3,5	.63 [16,0]	.28 [7,1]	.20 [5,1]	.49 [12,5]	.15 [3,8]
P14-6FN	#6	M3,5	.63 [16,0]	.24 [6,1]	.20 [5,1]	.49 [12,5]	.15 [3,8]
P14-8F	#8	M4	.69 [17,5]	.31 [7,9]	.23 [5,8]	.53 [13,5]	.17 [4,3]
P14-10F	#10	--	.71 [18,0]	.34 [8,6]	.25 [6,4]	.55 [14,0]	.20 [5,1]

*NOT CSA CERTIFIED

NOTES:

- UL 486A/B LISTED & CSA C22.2 NO. 65-03 CERTIFIED FOR:
 - SOLID OR STRANDED COPPER WIRE
 - 302°F [150°C] MAX OPERATING TEMPERATURE
 - 2000 VOLTS MAX
 - SOME TOOLS HAVE EXPANDED WIRE SIZES. SEE TOOL TABLES FOR AWG WIRE SIZES SUPPORTED BY EACH TOOL.
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- MATERIAL:
 - STAMPING: .032" [0,8] THK COPPER, TIN PLATED
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- WIRE STRIP LENGTH: $9/32" \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,1mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]


UL & CSA APPROVED TOOLS

CT-100B (#16-14)
CT-200 (#16-14)
CT-1570 (#18-14)
CT-2300 (#18-14)
CT-2400 (#18-14)
CT-2457CH (#18-14)
CT-2457CHA (#18-14)
CT-2500 (#18-14)
CT-2570CH (#18-14)

PANDUIT APPROVED TOOLS

CT-160 (#16-14)
CT-260 (#16-14)

METRIC EQUIVALENT
#18 AWG = 1,0 mm²
#16 AWG = 1,5 mm²
#14 AWG = 2,5 mm²

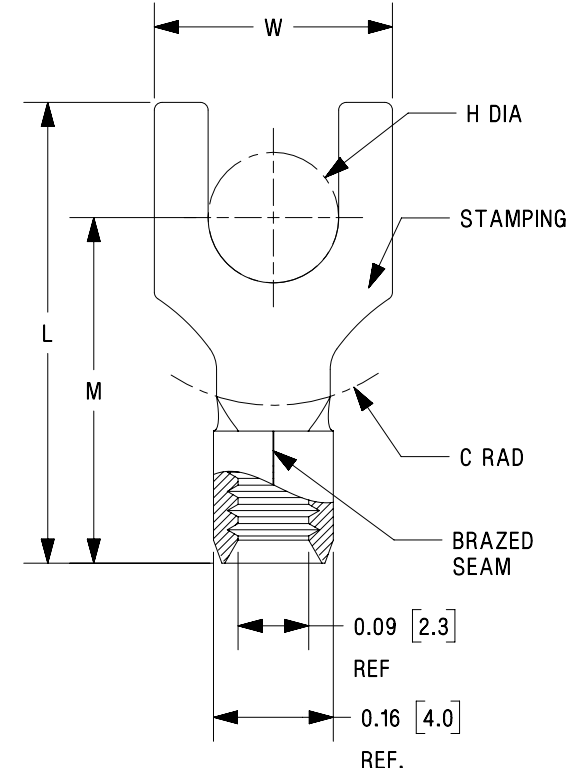

PART NUMBER		SEE TABLE	
TITLE		#16-14 BARREL UNINSULATED FORK	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N41255BA-12	
MATERIAL		N41255BA-DC/12A	
DRAWING NUMBER		N41255-DC	
THIRD ANGLE PROJECTION		SEE NOTE 3	
DRAWN BY		MS	
DATE		-	
CHK		NONE	
SCALE		SHEET 1 OF 1	
SIZE		A	

B

A

A

A

A-SIZE CUSTOMER