
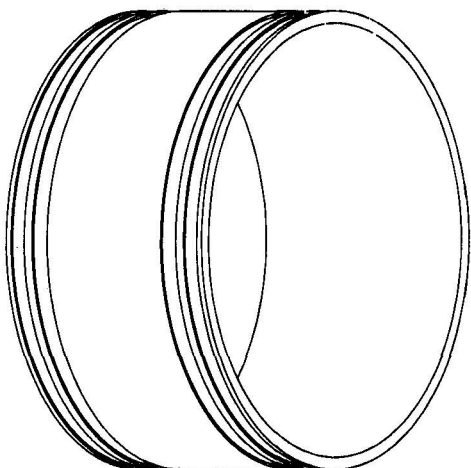
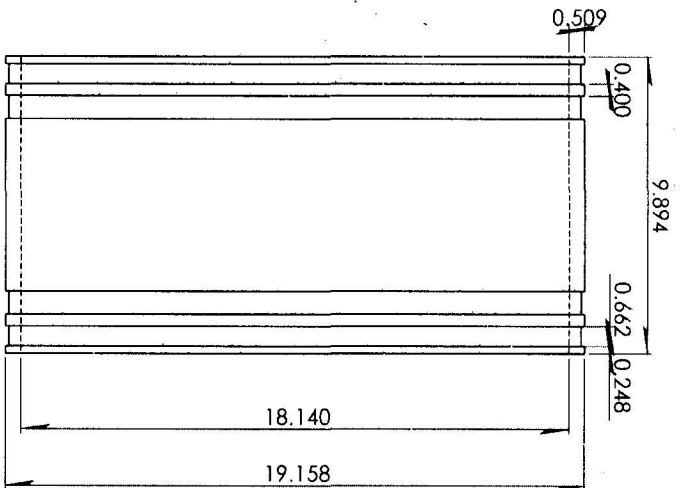


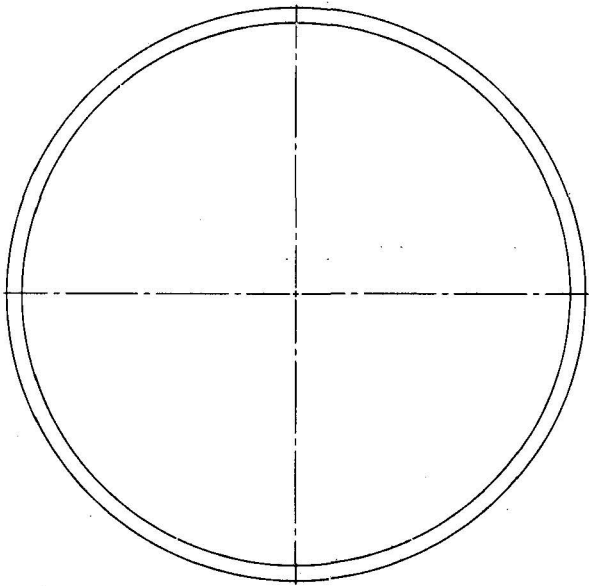

NOTES:
-HIDDEN LINES NOT
SHOWN
-BREAK ALL SHARP CORNERS
-REPORT ALL CHANGES TO
ENGINEERING

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FERNCO, INC. ANY REPRODUCTION IN
WHOLE OR IN PART WITHOUT THE
WRITTEN PERMISSION OF FERNCO, INC.
IS PROHIBITED.

Part Weight	
Min/Max Temp.	-30/140 Degrees F
Pressure Tested	4.3 PSI
Material	Flexible PVC
Installation Torque	60" Lbs.
Conforms to ASTM	D5926
Box Quantity	300 Series
Clamps Used	

UNITS: INCHES
SCALE: A
3RD ANGLE PROJECTION
DO NOT SCALE DRAWING

DESIGNER: D. Brady
CHECKER:
DATE: 4/4/2008

SCALE: not to scale
SHEET 1 OF 1




TOLERANCES:
X = Fractional
XX = ± .02
XXX = ± .030
ANG = ± 0.5°
UNLESS OTHERWISE SPECIFIED

DESCRIPTION: 15" X 15" Clay x Clay

1001-1515

FERNCO
INC.

300 S. DAYTON ST.
DAVISON, MI 48423
PH: 810-653-9626
FAX: 810-654-2616

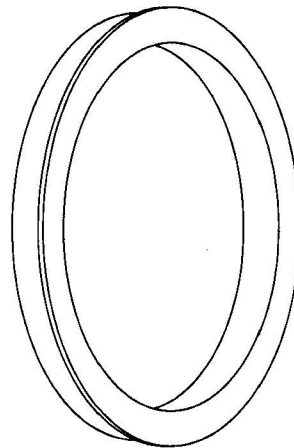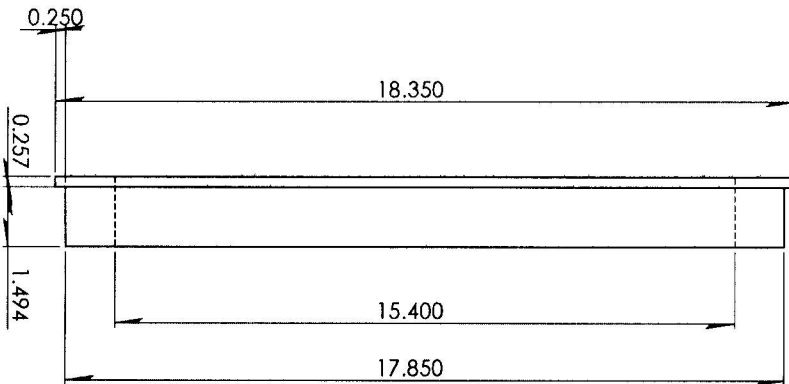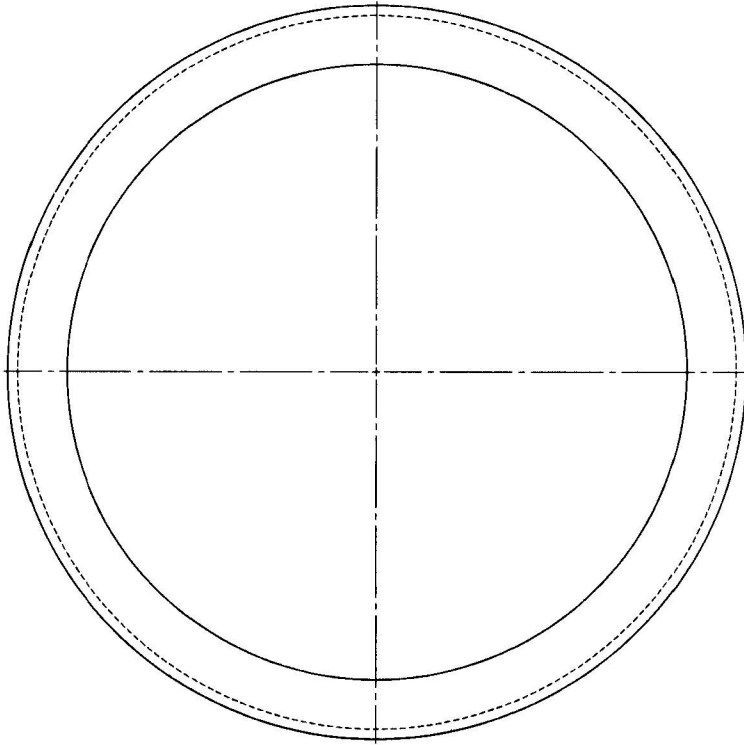

NOTES:
- HIDDEN LINES NOT SHOWN
- BREAK ALL SHARP CORNERS
- REPORT ALL CHANGES TO ENGINEERING

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN WRITING OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

Part Weight	
Min/Max Temp.	-30/140 Degrees F
Pressure Tested	4.3 PSI
Material	Flexible PVC
Installation Torque	60" Lbs.
Conforms to ASTM	D5926
Box Quantity	300 Series
Clamps Used	

UNITS: INCHES
SCALE: A
3RD ANGLE PROJECTION
DO NOT SCALE DRAWING

TOLERANCES:
.X = Fractional
.XX = $\pm .02$
.XXX = $\pm .030$
ANG = $\pm 0.5^\circ$
UNLESS OTHERWISE SPECIFIED

DESCRIPTION:


Reducer Bushing

17.850-15.400R



300 S. DAYTON ST.
DAVISON, MI 48423
PH: 810-653-9626
FAX: 810-654-2616

Part	Width	Clamps		Dia. Inch	
Number	"A"	SAE	Qty.	Max	Min
SRC-9	1.50"	032	1	2.50	1.56
SRC-11	1.50"	044	1	3.25	2.31
SRC-15	2.13"	064	2	4.50	2.62
SRC-16P	3.00"	080	2	5.50	3.62
SRC-19	2.13"	088	2	6.00	4.09
SRC-22	2.13"	096	2	6.50	4.50
SRC-25	4.00"	116	2	7.75	5.75
SRC-27	4.00"	128	2	8.50	6.50
SRC-28	4.00"	140	2	9.25	7.25
SRC-33	4.00"	152	2	10.00	8.00
SRC-35	4.00"	164	2	10.75	8.75
SRC-37	4.00"	184	2	12.00	10.00
SRC-39	4.00"	196	2	12.75	10.75
SRC-46	4.00"	(2) 116	2	14.50	11.50
SRC-54	4.00"	(2) 128	2	17.00	14.00
SRC-56	4.00"	(2) 140	2	17.50	14.50
SRC-59	4.00"	(2) 152	2	18.50	16.00
SRC-63	4.00"	164+152	2	19.75	16.75
SRC-73	4.00"	(2) 184	2	23.00	20.00
SRC-82	4.00"	164+248	2	25.75	22.75
SRC-84	4.00"	164+248	2	26.50	23.50
SRC-94	4.00"	140+184+212	2	29.75	26.75
SRC-105	4.00"	140+184+212	2	33.40	30.40
SRC-110	4.00"	140+212+212	2	34.75	31.75

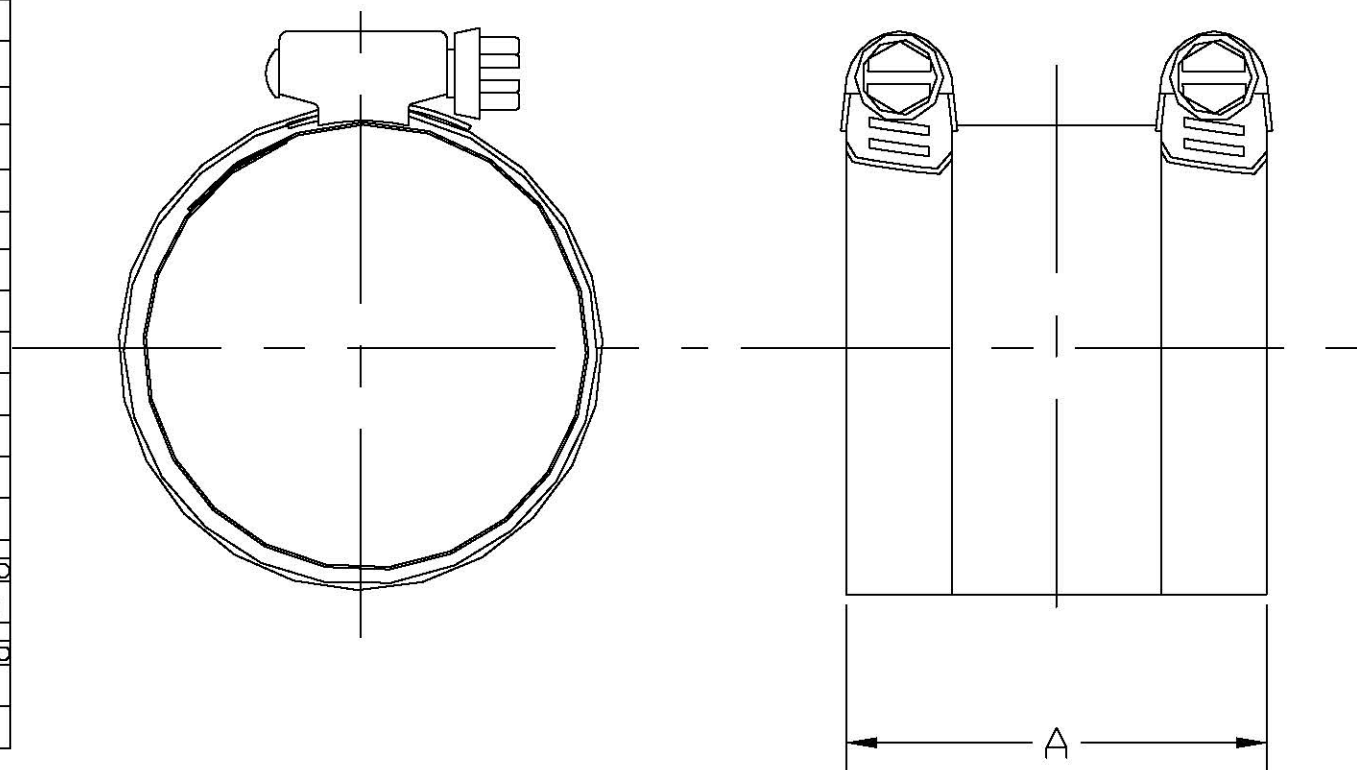

Notes

1. All Components 300 Series Stainless Steel
2. Clamps are Spot Welded to Shields
3. SRC-9 & SRC-11 Utilize 1 Clamp in the Center of the Shield
4. Shield Thickness .012", 304SS
5. Installation Torque up to 60"lbs.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Added SRC-16P	12Mar10	AJD
	2	Added Sizes > 59	12Oct11	AJD

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS .06 JOC ± .032 DO NOT SCALE DRAWING				
		SRC Shields		
DRAWN AJD	DATE 12Oct11	SIZE A	FSM NO.	DWG NO. SRC-01
CHECKED				REV 2