

## QB1

75 watt Quartz Bullet Flood with silicone O-ring gasket, thick tempered glass lens, internal and external cooling fins. Gold plated socket contacts and 250°C Teflon coated wires for extended lamp life. Lamp supplied.

Finish:   
 Bronze   
 Black   
 White   
 Verde Green



## QB2 Twin Flood Kit

Twin 75 watt Quartz Bullet floods come pre-assembled and pre-wired on C103 Mounting plate. Lamps supplied.

Finish:   
 Bronze   
 Black   
 White   
 Verde Green



**Completely Assembled**  
 And Pre-Wired  
 For Quick Installation



Tuff Dome Sensor with QB Floods

Add motion control with Tuff Dome or Mini Sensors. Lamps supplied. See pages 36-39.






SNL1

## Catalog Numbers

Bronze	White	Black	Verde Green
QB1A	QB1W	QB1B	QB1VG

Bronze	White	Black	Verde Green
QB2A	QB2W	QB2B	QB2VG

## Dimensions

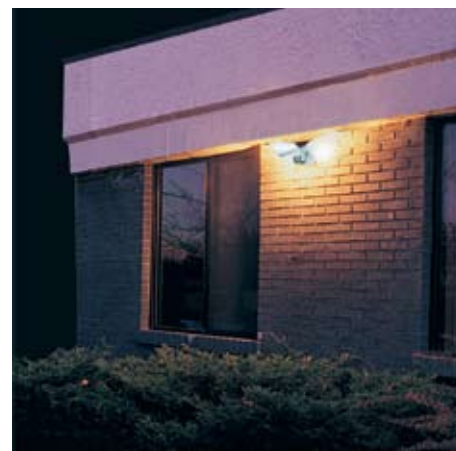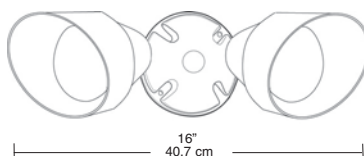

Use properly aimed floods for Friendly Lighting of residential and commercial buildings.

# QUARTZ FLOODS BULLETS



High quality features and innovative design make RAB Bullet Floods the best in the industry.

*Twin 75w Flood Kit pre-assembled for easy installation*

*Integra Hood Glare Shield minimizes side glare and hood can be rotated to direct the light where you need it*

*Highest quality 120 volt quartz lamp supplied*

*Lamp packed with protective cushion for easy installation*


*Thick, tempered glass lens with silicone O-ring gasket*

*External and internal heat dissipating fins*

*Precision die cast aluminum housing with durable powder coat paint*


*Arm with locking teeth tightens securely with just finger pressure*

*EZ Grip locknut matches fixture finish and can be adjusted with fingers, pliers or a screwdriver*



*Gold contacts prevent lamp and socket fusion due to electrolytic corrosion. Problem free relamping every time!*

*Internal and external heat dissipating fins for cooler operation to extend lamp and fixture life*

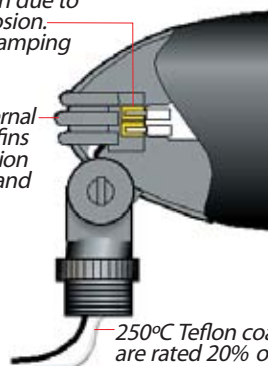

*250°C Teflon coated wires are rated 20% over the operating temperature for longer life and greater reliability*



Full color packaging with product features and specifications.

## Product Information

**Quartz Halogen**  
Lamp supplied with fixture

Lamp Watts	Lamp Type	Lamp Base	Initial Lumens	Lamp Hours
75	T-4	bi-pin (G8)	1,500	1,500

## Specifications

### UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground.

### Housing:

Precision die cast aluminum. 1/2" NPS threaded arm with locking swivel and EZ Grip lock nut fits all standard mounting covers.

### Lens Gasket:

High temperature silicone gasket stays in place during relamping.

### Reflector:

Semi-specular anodized aluminum

### Socket:

Porcelain bi-pin G8 base with gold plated contacts and 250°C socket wires.

### Lens:

Thick tempered glass

### Finish:

Chip and fade resistant durable powder coat finish.

### Replacement Lamps:



Fixture	Lamp Cat #
QB1/2	LQ75-GY8

### Patents:

The designs of RAB fixtures are protected under U.S. and international intellectual property laws.

## Info Online 24/7


[www.rabweb.com](http://www.rabweb.com)

Spec sheets • EZ Lighting Layouts  
Photometrics • Wiring Diagrams  
IES Files • Installation Instructions



## Photometrics

QB1 75w Fixture @ 10' Mounting Height  
Aimed 60° Below Horizontal



Mounting Height	Multiplier
8	1.6
10	1.0
12	.7
16	.4
18	.3