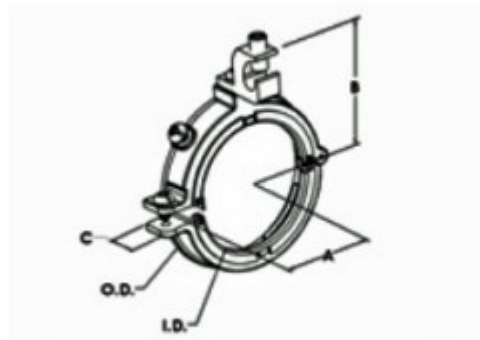


## Split Bushing, Insulated, Grounding, Zinc Die Cast, Size 2 Inch, 14-4 Grounding Lug

Used in situations where wires have already been pulled through conduit or EMT fittings, and an insulated Grounding bushing is required. Grounding lug; aluminum alloy 6061-T6. Rated 150 Degree C. cULus listed to UL514B and UL467 specifications. Patented. All Zinc Die Cast Mighty-Rites are now available with Stainless steel hardware and UV stabilized insulators, for use in outdoor applications.

[Download Photo](#)[Download Drawing](#)

### Product details

<b>Catalog Number:</b>	SGB-38614
<b>UPC Number:</b>	78174793862
<b>Primary Materials:</b>	Zinc Die Cast
<b>Finish:</b>	Ball Burnished, Mirror Smooth, Grounding lug: Tin Electro-plate
<b>Trade Size:</b>	2"
<b>Unit Quantity:</b>	10
<b>Standard Package Quantity:</b>	100

### Dimensions

<b>Trade Size:</b>	2"
<b>Dimensions A:</b>	1.9
<b>Dimensions B:</b>	2.29
<b>Dimensions C:</b>	0.73
<b>Dimensions D:</b>	1.96
<b>Dimensions E:</b>	2.7

### Certifications & Codes

**Federal Specification Number:** A-A-50553**UL File Number:** E20412**UNSPSC:** 39121312**Nema Standard:** FB-1**Patent Number:** 7,182,611; 6,840,782; 8,419,449