

Fig. 65

Light Duty Adjustable Clevis

Size Range: $\frac{3}{8}$ " through 4"

Material: Carbon steel

Finish: Plain or Galvanized

Service: Recommended for suspension of **stationary** pipe or conduit.

Maximum Temperature: Plain 650° F, Galvanized and Epoxy 450° F

Approvals: Complies with Federal Specification WW-H-171-E (Type 12).

Installation: Hanger load nut above the clevis must be tightened securely to assure proper hanger performance.

Adjustment: Vertical adjustment is provided, varying with the size of clevis. Tighten upper nut after adjustment.

Features: An economical attachment for light duty service.

Ordering: Specify pipe size, figure number, name and finish.

Metric nut available upon request.

Caution: When an oversize clevis is used, a pipe spacer or multispace should be placed over clevis bolt to ensure that the lower U-strap will not move in on the bolt.

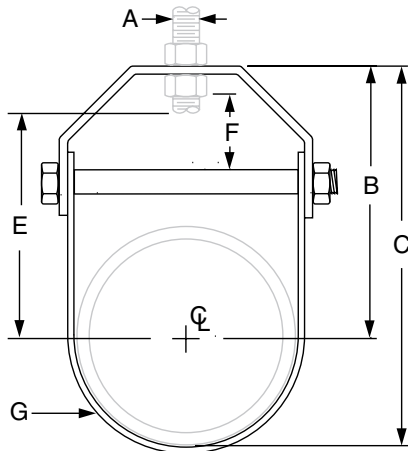


FIG. 65: LOADS (LBS) • WEIGHT (LBS) • DIMENSIONS (IN)

Pipe Size	Max Load	Weight	Rod Size A	B	C	Rod Take Out E	Adjustment F	G Width Lower
$\frac{3}{8}$	150	0.09	$\frac{3}{8}$	$1\frac{1}{2}$	$1\frac{27}{32}$	$1\frac{1}{16}$	$\frac{5}{16}$	$\frac{5}{8}$
$\frac{1}{2}$		0.10		$1\frac{11}{16}$	$2\frac{3}{32}$	$1\frac{1}{4}$	$\frac{7}{16}$	
$\frac{3}{4}$	250	0.17		$1\frac{7}{8}$	$2\frac{13}{32}$	$1\frac{7}{16}$	$\frac{1}{2}$	$\frac{3}{4}$
1		0.18		$2\frac{5}{32}$	$2\frac{13}{16}$	$1\frac{11}{16}$	$\frac{5}{8}$	
$1\frac{1}{4}$		0.21		$2\frac{17}{32}$	$3\frac{3}{8}$	$2\frac{1}{16}$	$\frac{13}{16}$	
$1\frac{1}{2}$		0.24		$2\frac{13}{16}$	$3\frac{13}{16}$	$2\frac{3}{8}$	$\frac{15}{16}$	
2		0.26		$3\frac{11}{32}$	$4\frac{17}{32}$	$2\frac{7}{8}$	$1\frac{3}{16}$	
$2\frac{1}{2}$	350	0.50		$3\frac{27}{32}$	$5\frac{9}{32}$	$3\frac{1}{4}$	$1\frac{5}{16}$	
3		0.59		$4\frac{15}{32}$	$6\frac{7}{32}$	$3\frac{7}{8}$	$1\frac{5}{8}$	
$3\frac{1}{2}$		0.62		$4\frac{31}{32}$	$6\frac{31}{32}$	$4\frac{3}{8}$	$1\frac{7}{8}$	
4	400	0.77		$5\frac{17}{32}$	$7\frac{25}{32}$	$4\frac{15}{16}$	$2\frac{1}{8}$	