

current

powered by GE

16648 - GE Blax® T6 - Facilities. Retail Display. Hospitality. Office.

Restaurant. Warehouse

F40/30BX/SPX35

PRODUCT PHOTO



GENERAL CHARACTERISTICS

Base Type	Pin/Plug-In
Life in Years	18.3 yr
Mercury Content	4 mg
Rated Life Hours-nominal	20000 h
Starting Temp (MIN) C-degrees	10 °C
Base Description	4-Pin
Mercury-Picogram per mean lm hr	70.4
Primary Application	Facilities Retail Display Hospitality Office Restaurant Warehouse
Product Technology	Compact Fluorescent
Lamp Count	1
Base	2G11
Bulb Shape	T6

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	2840 lm
Nominal Initial Lumen per Watt	79
Color Rendering Index-CRI	82
Color Temperature	3500 K

PRODUCT INFORMATION

Product Code	16648
Description	F40/30BX/SPX35
Alternative Unit Of Measure	EACH
Standard Package Quantity	1
Ean UPC	043168166485
Standard Package GTIN	00043168166485
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	1
Sales Unit	Each
UCC	043168166485
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168166485
Standard Package GTIN	10043168166482
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168166485
Alternative Unit Of Measure	CASE
Standard Package Quantity	40
Ean UPC	043168166485
Standard Package GTIN	30043168166486
No Of Items Per Sales Unit	
No Of Items Per Standard Package	40
Sales Unit	Case
UCC	043168166485

DIMENSIONS

Nominal Length	22.5 in
Bulb Max Overall Length-MOL	22.5 in

ELECTRICAL CHARACTERISTICS

Equivalent Incandescent Watts	180 W
Rated power (Watts)	40 W

CAUTIONS & WARNINGS


Caution

Lamp may shatter and cause injury if broken

Remove and install by grasping only plastic portion of the lamp.

NOTES

4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).

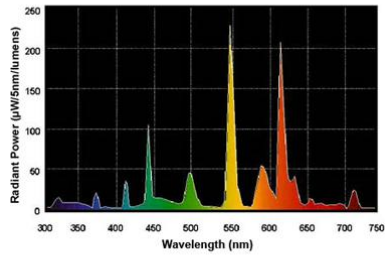

Oct 16, 2019 10:15:25 PM | For additional information, visit products.currentbyge.com