



LED Lamps - HID



Ballast Bypass - Ordinary Locations

LED replacement for HID lamps leverage the low energy and long life of LED. The existing fixture is wired to bypass the ballast, which reduces energy use and eliminates the need to check ballast compatibility. Additional maintenance savings are realized by removing costs associated with purchasing and installing ballasts.

PERFORMANCE HIGHLIGHTS:

Ballast Bypass - Ordinary Locations	
Light Output:	3,000 - 85,000 Lumens
CRI:	70
CCT:	3000K, 3500K, 4000K, 5000K
Input Voltage:	120-277V; 120-347V; 277-480V
Efficiency:	Up to 180 LPW
Wattage:	21W-470W
Life:	50,000
Temperature Rating:	-40°C to +50°C
Location Rating:	Damp
Fixtures:	Open or Enclosed

LIMITED WARRANTY

5 years

FEATURES:

- 3.3X longer life than metal halide (50,000 vs 15,000 hours)
- Uses 60-75% less energy, providing similar light output
- In-line misapplication fuse kit included
- Tether kit included with ED18, ED23.5, ED28, ED37 & BT56
- Horizontal support kit included with ED37 & BT56
- Matches ANSI length & diameter of HID lamp shape
- These lamps are energy efficient, contain no lead or mercury and are compliant with material restriction requirements of RoHS

BENEFITS:

- **Energy + Cost Savings:** an LED lamp saves in energy costs over the rated life of the lamp vs. a standard HID lamp. See energy savings chart below.
- Ballast bypass (Type B) wiring eliminates costs and hassle associated with replacing ballasts

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.

Energy Savings switching from HID to Type B LED Lamps

Lamp Replacement Wattage	HID System Wattage	LED System Wattage	System Energy Savings (W)	System Energy Cost Savings Over Life of Lamp*
1000	1075	450	625	\$3,437
1000	1075	270	805	\$4,427
750	825	200	625	\$2,553
400	460	150	310	\$1,705
250	290	115	175	\$962
175	210	80	130	\$715
100	120	50	70	\$385

*Based on energy rates at 0.11 per kWh over the life of the lamp

**LED Lamps for Hazardous Locations are also available -
See Spec Sheet LEDL089 & White Paper LEDL126 for more information.**



Ballast Bypass for Ordinary Locations

CUSTOMER NAME _____


PROJECT NAME _____

DATE _____

NOTES _____

GE LED Lamps for HID Replacement utilize a proprietary design with active cooling, which allows for high output from a compact size. The length and diameter match HID ANSI profiles. These lamps feature omnidirectional light output, with similar distribution to traditional HID lamps. This enables GE LED Lamps to fit in a variety of fixtures while providing equivalent light levels to HID. All of the GE LED Lamps in this category are Type B, which means the fixture is re-wired to bypass the ballast.

Lamp **Drawings** (not drawn to scale)

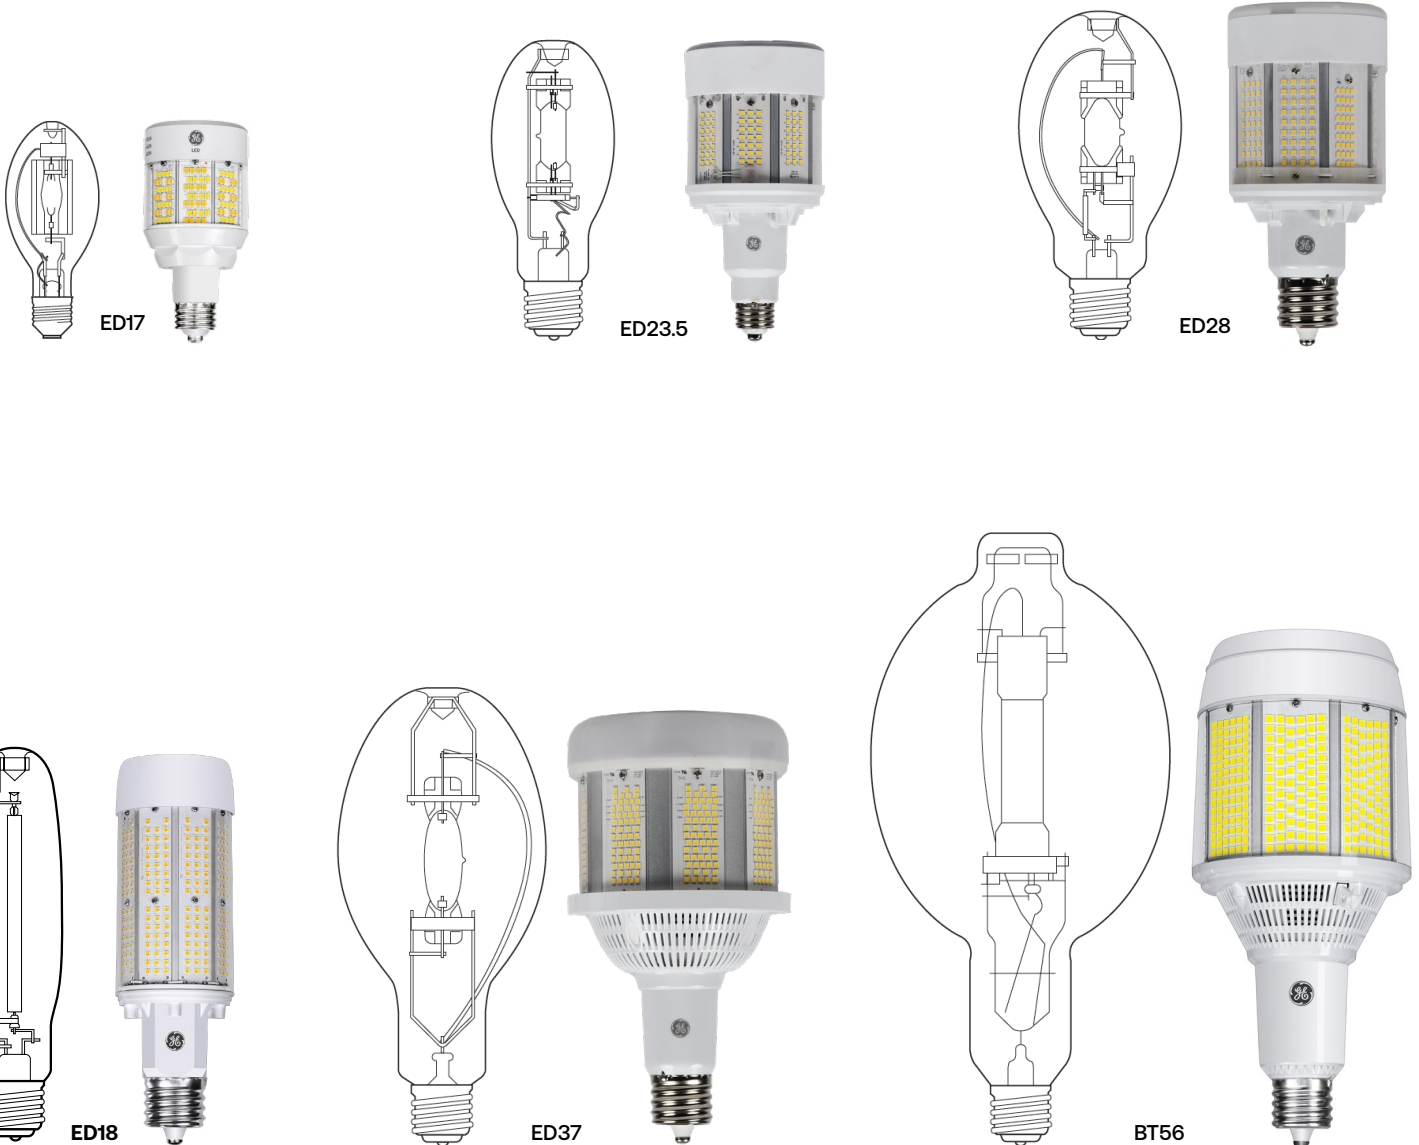



Ballast Bypass for Ordinary Locations

CUSTOMER NAME _____

PROJECT NAME _____

DATE _____

NOTES _____

NEMA LED HID Wattage Equivalency

In February of 2021, the National Electrical Manufacturers Association (NEMA) published NEMA LL 10-2020 *Replacing HID Lamps with LED Lamps: Light Output Equivalency Claims*. Current uses this Standard for LED products replacing HID lamps, meeting or exceeding the minimum LED light output for equivalency claims. The LED wattage equivalency varies based on the type of HID lamp being replaced - Metal Halide (MH) or High Pressure Sodium (HPS).

Metal Halide Lamp Wattage (W)	Metal Halide Initial Light Output (lm)	Minimum LED Lamp Initial Light Output (lm)	Current LED Ordinary Location Retrofit Lamps	Current LED Ordinary Location Selectable Retrofit Lamps	Current LED Hazardous Location Retrofit Lamps
50	3,200	2,000	LED21ED17	LED/LC/ED17	LED21ED17/HAZ
70	5,200	3,000	LED21ED17	LED/LC/ED17	LED21ED17/HAZ
100	8,100	5,000	LED35ED17; LED45ED17	LED/LC/ED17	LED35ED17/HAZ; LED45ED17/HAZ
150	12,000	7,500	LED50ED23.5	LED/LC/ED23	
175	11,000	7,000	LED45ED17; LED50ED23.5	LED/LC/ED17; LED/LC/ED23	
250	19,100	12,000	LED80ED23.5	LED/LC/ED28	LED80ED23.5/HAZ
320	25,600	16,500	LED115ED28	LED/LC/ED28	
350	28,400	18,000	LED115ED28	LED/LC/ED28	
360	29,400	19,000	LED150ED28	LED/LC/ED28	LED150ED28/HAZ
400	33,100	21,500	LED150ED28; LED180ED18; LED200ED37	LED/LC/ED28; LED/LC/ED37	LED150ED28/HAZ
750	72,300	46,500	LED360ED37	LED/LC/ED37	
1,000	100,280	65,000	LED450BT56; LED470BT56	LED/LC/ED37	

HPS Lamp Wattage (W)	HPS Initial Light Output (lm)	Minimum LED Lamp Initial Light Output (lm)	Current LED Ordinary Location Retrofit Lamps	Current LED Ordinary Location Selectable Retrofit Lamps	Current LED Hazardous Location Retrofit Lamps
50	4,500	2,500	LED21ED17	LED/LC/ED17	LED21ED17/HAZ
70	6,300	4,000	LED35ED17	LED/LC/ED17	LED35ED17/HAZ
100	9,500	6,000	LED45ED17; LED50ED23.5	LED/LC/ED17; LED/LC/ED23	LED45ED17/HAZ
150	13,000	8,500	LED80ED23.5	LED/LC/ED23	LED80ED23.5/HAZ
200	19,500	12,500		LED/LC/ED28	
250	26,000	17,000	LED115ED28	LED/LC/ED28	
310	33,200	21,500	LED150ED28	LED/LC/ED28	LED150ED28/HAZ
400	44,000	29,000	LED180ED18; LED200ED37; LED270BT56	LED/LC/ED37	
600	66,000	42,500	LED360ED37	LED/LC/ED37	
750	82,500	53,500	LED450BT56	LED/LC/ED37	
1,000	110,000	73,000	LED470BT56		



Ballast Bypass for Ordinary Locations

CUSTOMER NAME _____

PROJECT NAME _____

DATE _____

NOTES _____

Current offers unmatched flexibility with Selectable LED HID Replacement Lamps. Select wattage and color temperature at the flick of a switch.


Reduce & simplify inventory - one lamp can replace many, reducing inventory dollars & storage space

Optimize solutions & save - adjust light output to the correct level & color for each application & reduce energy consumption

Simplify projects & BOMs - streamline product lists & take the guesswork out of which lamps are needed where



Select wattage (lumens) using built-in switch.

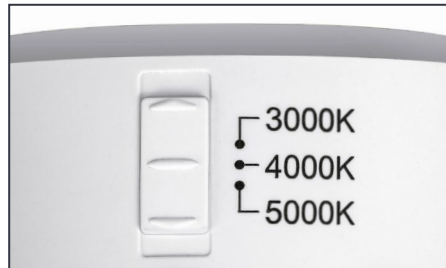

Select color temperature using built-in switch.



Even more versatility

Each E26 base lamp comes with a mogul base adapter.

Lamps may be used in E26 or E39/EX39 sockets.



LED Lamps - HID

Ballast Bypass for Ordinary Locations

CUSTOMER NAME

PROJECT NAME

DATE

NOTES

Selectable LumenChoice® + SpectraChoice™ HID Replacements - Type B

Bulb Shape	Base Type	Selectable Watts*	Order Code	Description	Volts	Carton Qty ²	MOL (in)	MOD (in)	Selectable Lumens (Initial) ⁷	Selectable Color Temp.* (Initial)	CRI	Wattage Replacement ⁸	Rated Life L70 (Hrs) ¹	DLC ^{3,4}	Location Rating ^{5,6}
LED Replacement Lamp for HID - Ballast Bypass (Type B)															
ED17	E26/EX39	21 35* 45	93303384	LED/LC/ED17/7SC	120-277	3	5.4	2.6	3,400 5,500* 7,000	3000K 4000K* 5000K	>70	50W HPS / 70W MH 70W HPS / 100W MH 100W HPS / 175W MH	50,000	-	Damp
ED17	E26/EX39	21 35* 45	93314526	LED/LC/ED17/7SC/120-347	120-347	3	5.4	2.6	3,400 5,500* 7,000	3000K 4000K* 5000K	>70	50W HPS / 70W MH 70W HPS / 100W MH 100W HPS / 175W MH	50,000	-	Damp
ED23.5	E26/EX39	50 65 80*	93312104	LED/LC/ED23.5M/7SC	120-277	3	7.8	3.7	8,200 10,500 12,500*	3000K 4000K 5000K*	>70	100W HPS / 150W MH 150W HPS / 150W MH 150W HPS / 250W MH	50,000	-	Damp
ED23.5	EX39	50 65 80*	93312106	LED/LC/ED23.5/7SC	120-277	3	7.8	3.7	8,200 10,500 12,500*	3000K 4000K 5000K*	>70	100W HPS / 150W MH 150W HPS / 150W MH 150W HPS / 250W MH	50,000	S-4V5N0G	Damp
ED28	EX39	90 115 150*	93312102	LED/LC/ED28/7SC	120-277	3	8.3	4.1	14,000 18,000 23,500*	3000K 4000K 5000K*	>70	200W HPS / 250W MH 250W HPS / 350W MH 310W HPS / 400W MH	50,000	-	Damp

Selectable LumenChoice® HID Replacements - Type B

Bulb Shape	Base Type	Selectable Watts*	Order Code	Description	Volts	Carton Qty ²	MOL (in)	MOD (in)	Selectable Lumens (Initial) ⁷	Selectable Color Temp.* (Initial)	CRI	Wattage Replacement ⁸	Rated Life L70 (Hrs) ¹	DLC ^{3,4}	Location Rating ^{5,6}
LED Replacement Lamp for HID - Ballast Bypass (Type B)															
ED37	EX39	200 325 450*	93311586	LED/LC/ED37/740	277-480	3	11.3	5.6	35,000 53,500 68,000*	4000K	>70	400W HPS / 400W MH 750W HPS / 750W MH 750W HPS / 1000W MH	50,000	S-ZZMLJT	Damp
ED37	EX39	200 325 450*	93311587	LED/LC/ED37/750	277-480	3	11.3	5.6	35,000 53,500 68,000*	5000K	>70	400W HPS / 400W MH 750W HPS / 750W MH 750W HPS / 1000W MH	50,000	S-25L41Q	Damp

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)² Minimum order quantity = 1³ E26 based products are not eligible for DLC. Not all product variations on this page are DLC qualified. Visit qpl.designlights.org/solid-state-lighting to confirm qualification.⁴ Do not use with phase-cut dimmers. Dimming functions only with external Variac control devices.⁵ UL 1993 Environmental Requirements for LED LAMPS⁶ Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations⁷ Not suitable for air-tight explosive or hazardous fixtures.⁸ Lumen levels correspond with wattage levels. Color temperature levels are independent of wattage & lumens.⁹ Wattage Replacement levels correspond with wattage levels. Wattage Replacements based on NEMA Standards Publication LL 10-2020 *Replacing HID Lamps with LED Lamps: Light Output Equivalency Claims*.

* Default wattage and color temperature settings noted by "*" in tables above. Lumen levels correspond with wattage levels. Color temperature levels are independent of wattage & lumens.

Go to www.LED.com to learn more about Current's family of Selectable LED Lamps.



Selectable LED Lamps



LED Lamps - HID

Ballast Bypass for Ordinary Locations

CUSTOMER NAME _____

PROJECT NAME _____

DATE _____

NOTES _____

LED HID - Type B

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (in)	MOD (in)	Lumens (Initial)	Color Temp. (Initial)	CRI	Wattage Replacement ⁸	Rated Life L70 (Hrs) ¹	DLC ^{3,4}	Location Rating ^{5,6}		
LED Replacement Lamps for HID - Ballast Bypass (Type B)																	
	ED17	E26	21	27729	LED21ED17/740	120-277	3	5.4	2.6	3,000	4000K	>70	50W HPS / 70W MH	50,000	-	Damp	
		E26	21	27732	LED21ED17/750	120-277	3	5.4	2.6	3,000	5000K	>70	50W HPS / 70W MH	50,000	-	Damp	
		E26	35	93112114	LED35ED17/730	120-277	3	5.4	2.6	5,000	3000K	>70	70W HPS / 100W MH	50,000	-	Damp	
		E26	35	27602	LED35ED17/740	120-277	3	5.4	2.6	5,000	4000K	>70	70W HPS / 100W MH	50,000	-	Damp	
		E26	35	27724	LED35ED17/750	120-277	3	5.4	2.6	5,000	5000K	>70	70W HPS / 100W MH	50,000	-	Damp	
		E26	45	93116975	LED45ED17/835	120-277	3	5.4	2.6	6,000	3500K	>70	100W HPS / 100W MH	50,000	-	Damp	
	E26	45	93148082	LED45ED17/740	120-277	3	5.4	2.6	7,000	4000K	>70	100W HPS / 175W MH	50,000	-	Damp		
	E26	45	93148081	LED45ED17/750	120-277	3	5.4	2.6	7,000	5000K	>70	100W HPS / 175W MH	50,000	-	Damp		
	ED23.5	E26	80	22768	LED80ED23.5M/740	120-277	3	7.8	3.7	12,000	4000K	>70	150W HPS / 250W MH	50,000	-	Damp	
		E26	80	93125008	LED80ED23.5M/750	120-277	3	7.8	3.7	12,000	5000K	>70	150W HPS / 250W MH	50,000	-	Damp	
		EX39	50	22679	LED50ED23.5/740	120-277	3	7.8	3.7	7,500	4000K	>70	100W HPS / 150W MH	50,000	P2LJ433Z	Damp	
		EX39	50	22739	LED50ED23.5/750	120-277	3	7.8	3.7	7,500	5000K	>70	100W HPS / 150W MH	50,000	P9E7B4MB	Damp	
		EX39	50	93154637	LED50ED23.5/740/277/480	277-480	3	7.8	3.7	7,500	4000K	>70	100W HPS / 150W MH	50,000	S-QSEC3A	Damp	
		EX39	50	93154639	LED50ED23.5/750/277/480	277-480	3	7.8	3.7	7,500	5000K	>70	100W HPS / 150W MH	50,000	S-TGNWE4	Damp	
		EX39	80	93112196	LED80ED23.5/730	120-277	3	7.8	3.7	12,000	3000K	>70	150W HPS / 250W MH	50,000	PDVK0YIV	Damp	
		EX39	80	22635	LED80ED23.5/740	120-277	3	7.8	3.7	12,000	4000K	>70	150W HPS / 250W MH	50,000	PHJ4LA1W	Damp	
		EX39	80	22676	LED80ED23.5/750	120-277	3	7.8	3.7	12,000	5000K	>70	150W HPS / 250W MH	50,000	PYL1MPL2	Damp	
		EX39	80	93154642	LED80ED23.5/740/277/480	277-480	3	7.8	3.7	12,000	4000K	>70	150W HPS / 250W MH	50,000	S-TUGPZM	Damp	
		EX39	80	93154640	LED80ED23.5/750/277/480	277-480	3	7.8	3.7	12,000	5000K	>70	150W HPS / 250W MH	50,000	S-1FJ4CK	Damp	
		ED28	EX39	115	93112197	LED115ED28/730	120-277	3	8.3	4.1	18,000	3000K	>70	250W HPS / 350W MH	50,000	PE646DNU	Damp
		EX39	115	22622	LED115ED28/740	120-277	3	8.3	4.1	18,000	4000K	>70	250W HPS / 350W MH	50,000	PONSAR2J	Damp	
		EX39	115	22623	LED115ED28/750	120-277	3	8.3	4.1	18,000	5000K	>70	250W HPS / 350W MH	50,000	PZFPZUL	Damp	
		EX39	115	93139853	LED115ED28/740/277/480	277-480	3	8.3	4.1	18,000	4000K	>70	250W HPS / 350W MH	50,000	PZ3P5P7U/PEQF29S7	Damp	
		EX39	115	93139854	LED115ED28/750/277/480	277-480	3	8.3	4.1	18,000	5000K	>70	250W HPS / 350W MH	50,000	PY31MNAU/PCV74KSL	Damp	
		EX39	150	93112198	LED150ED28/730	120-277	3	8.3	4.1	23,500	3000K	>70	310W HPS / 400W MH	50,000	PAVD2D0E	Damp	
		EX39	150	22611	LED150ED28/740	120-277	3	8.3	4.1	23,500	4000K	>70	310W HPS / 400W MH	50,000	P53Y3N60	Damp	
		EX39	150	22613	LED150ED28/750	120-277	3	8.3	4.1	23,500	5000K	>70	310W HPS / 400W MH	50,000	P1EL9LHG	Damp	
		EX39	150	93139849	LED150ED28/740/277/480	277-480	3	8.3	4.1	23,500	4000K	>70	310W HPS / 400W MH	50,000	PUGHU5LU/PYCANNIK7	Damp	
		EX39	150	93139850	LED150ED28/750/277/480	277-480	3	8.3	4.1	23,500	5000K	>70	310W HPS / 400W MH	50,000	PY3DUSYO/POTANRAP	Damp	
	ED18	EX39	180	93312096	LED180ED18/730	120-277	3	9.7	3.0	30,000	3000K	>70	400W HPS / 400W MH	50,000	S-F26H3J	Damp	
		EX39	180	93312098	LED180ED18/740	120-277	3	9.7	3.0	30,000	4000K	>70	400W HPS / 400W MH	50,000	S-WN2HR8	Damp	
		EX39	180	93312100	LED180ED18/750	120-277	3	9.7	3.0	30,000	5000K	>70	400W HPS / 400W MH	50,000	S-BG0B87	Damp	
		BT56	EX39	270	93153080	LED270BT56/740/120/277	120-277	3	12.3	5.6	40,000	4000K	>70	400W HPS / 400W MH	50,000	PG8499V4	Damp
	BT56	EX39	270	93153121	LED270BT56/750/120/277	120-277	3	12.3	5.6	40,000	5000K	>70	400W HPS / 400W MH	50,000	PIZKSQ30	Damp	
		EX39	270	93095547	LED270BT56/740	277-480	3	12.3	5.6	40,000	4000K	>70	400W HPS / 400W MH	50,000	PW00LOQL	Damp	
		EX39	270	93095553	LED270BT56/750	277-480	3	12.3	5.6	40,000	5000K	>70	400W HPS / 400W MH	50,000	PUZP8RVI	Damp	
		ED37	EX39	360	93122144	LED360ED37/740	277-480	3	10.6	5.6	53,000	4000K	>70	600W HPS / 750W MH	50,000	P7WQGT4S	Damp
	BT56	EX39	360	93122166	LED360ED37/750	277-480	3	10.6	5.6	53,000	5000K	>70	600W HPS / 750W MH	50,000	PK5HC9UY	Damp	
		BT56	EX39	450	93153122	LED450BT56/740/208/277	208-277	3	12.3	5.6	65,000	4000K	>70	750W HPS / 1000W MH	50,000	POIL8M4C	Damp
		EX39	450	93153123	LED450BT56/750/208/277	208-277	3	12.3	5.6	65,000	5000K	>70	750W HPS / 1000W MH	50,000	PD4K2UXF	Damp	
		EX39	450	93096445	LED450BT56/740	277-480	3	12.3	5.6	65,000	4000K	>70	750W HPS / 1000W MH	50,000	PLNCOZ5Z	Damp	
		EX39	450	93096547	LED450BT56/750	277-480	3	12.3	5.6	65,000	5000K	>70	750W HPS / 1000W MH	50,000	PH8F9ZNF	Damp	
		EX39	470	93303389	LED470BT56/740	277-480	3	12.8	5.6	85,000	4000K	>70	1000W HPS / 1000W MH	50,000	S-E56HRP	Damp	
	EX39	470	93303388	LED470BT56/750	277-480	3	12.8	5.6	85,000	5000K	>70	1000W HPS / 1000W MH	50,000	S-64APZW	Damp		
Additional Information for LED Replacement Lamps for HID: Open and Closed Rated - Ballast bypass required																	
These products are covered by U.S. Patents 10788163 and 10508776. These products may also be covered by other U.S. patents or pending applications.																	

LED HID E26/EX39 Socket Adapter

Current offers this adapter for use with E26 based GE LED HID lamps in mogul base applications.

Order Code	Description	Carton Qty ²
93151372	LED/E26/EX39/ADAPTER	60

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = 1

³ E26 based products are not eligible for DLC. Not all product variations on this page are DLC qualified. Visit qpl.designlights.org/solid-state-lighting to confirm qualification.

⁴ Do not use with phase-cut dimmers. Dimming functions only with external Variac control devices.

⁵ UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

⁶ Not suitable for air-tight explosive or hazardous fixtures.

⁸ Wattage Replacement levels correspond with wattage levels. Wattage Replacements based on NEMA Standards Publication LL 10-2020 *Replacing HID Lamps with LED Lamps: Light Output Equivalency Claims*.