

MATERIAL:  
PLASTIC BODY POLYCARBONATE (PC)  
FLAME RATING - 94V0



CONTACT BLADE:  
HIGH STRENGTH COPPER ALLOY

PLATING:  
FIFTY MICRO INCHES OF GOLD SELECTIVELY  
PLATED OVER 100 MICRO INCHES OF NICKEL.

ELECTRICAL:  
DIELECTRIC WITHSTANDING VOLTAGE 500 VAC  
INSULATION RESISTANCE 500 MEGOHMS  
TERMINAL RESISTANCE 35 MILLIOHMS  
TERMINAL RATING 250 VAC MAX AT 2 AMPS

MECHANICAL:  
MINIMUM CONTACT FORCE - 100 GRAMS  
INSERTION FORCE LESS THAN 5 LBS.  
PULL OFF FORCE - 10 LBS. MIN.  
DURABILITY - 200 MATING CYCLES  
CORD PULL OFF FORCE - 18 LBS. MIN

FOR WIRE TYPE:  
STRANDED

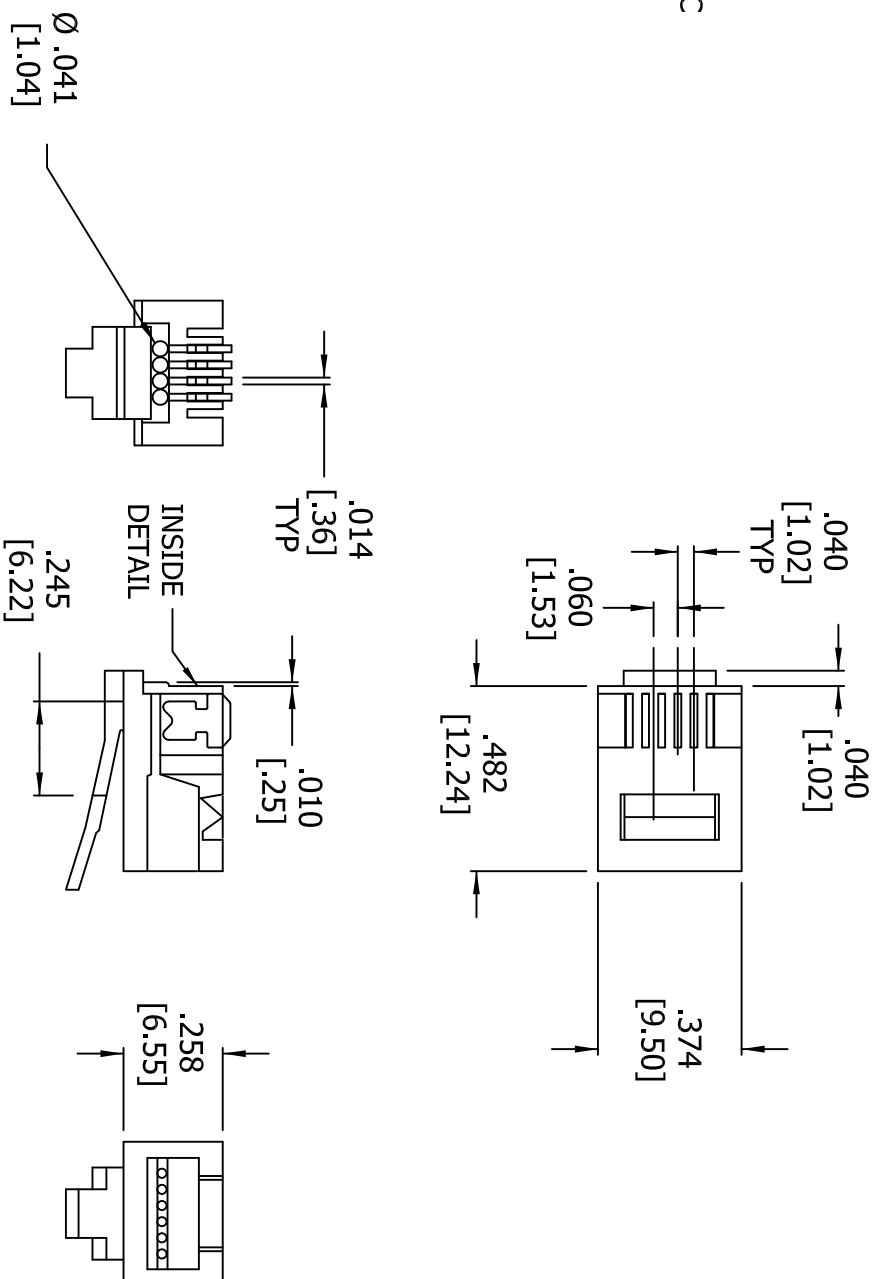

Allen Tel Products, Inc

**Allen Tel Products, Inc.**

30 TV5 DRIVE • HENDERSON, NV • 89014

AT4X6

MODULAR PLUG 4C6P



E121930 LR84410-5M