


**NOTE:**  
DIMENSIONS IN INCHES [mm]

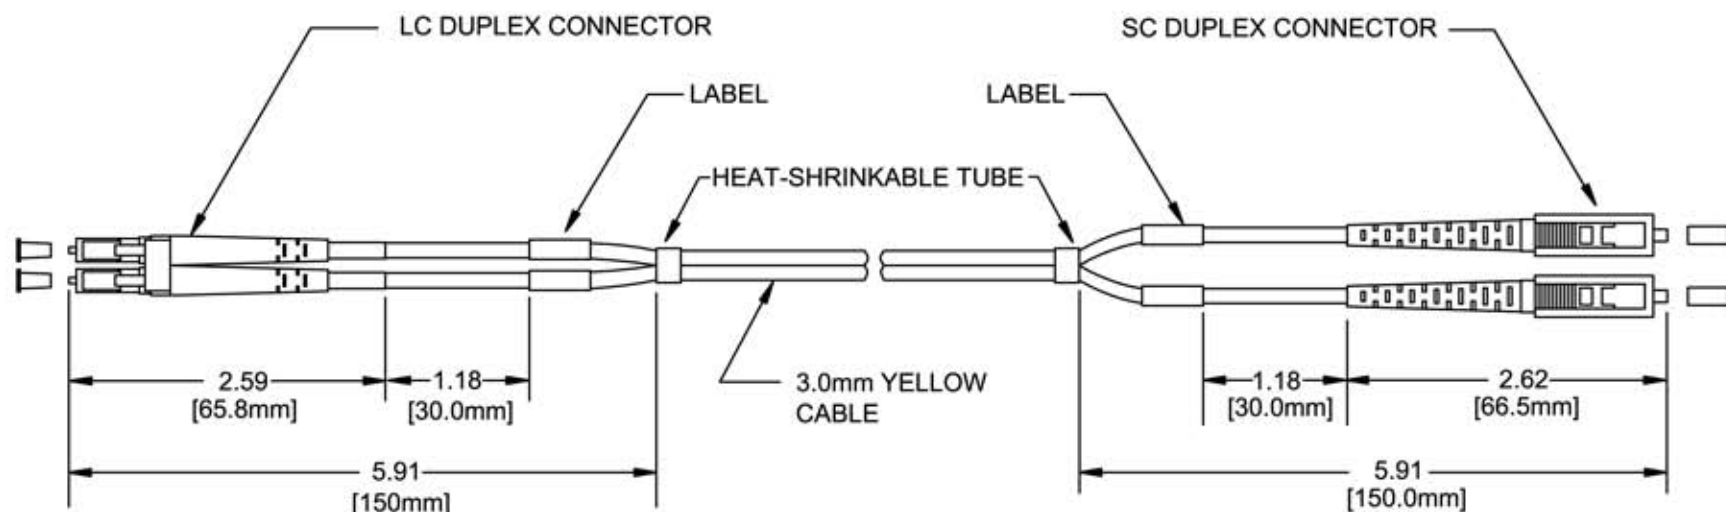

## SPECIFICATIONS

| PARAMETER              | UNITS |         |
|------------------------|-------|---------|
| FERRULE ID             | um    | 125     |
| INSERTION LOSS         | dB    | <0.2    |
| RETURN LOSS            | dB    | >50     |
| DURABILITY (500 TIMES) | dB    | <0.3    |
| OPERATING TEMPERATURE  | °C    | -40~+85 |
| STORAGE TEMPERATURE    | °C    | -40~+85 |
| TYPICAL CABLE OD       | mm    | Ø3.0    |

PART#: GBLCC-D1-XX

### LENGTH (METERS)

01, 02, 03, 04, 05, 06, 07,  
08, 09, 10, 15, 20, 25, 30

## FEATURES

- \* SC CONNECTORS ARE COMPLIANT IEC 60874-14; F04 (JIS C5973); TIA/EIA-604-3A
- \* LC CONNECTORS ARE COMPLIANT TIA/EIA-640-10; LUCENT: 640-252-256
- \* PRODUCT QUALITY COMPLY WITH GR-326-CORE



**Allen Tel Products, Inc.**  
30 TV5 DRIVE • HENDERSON, NV • 89014

**GBLCC-D1-XX LC TO SC DUPLEX  
SINGLEMODE 9/125 (YELLOW JACKET)**

