


50/125 um LO (10G-300m) MM OM3
 (1Ggb) 1,000/600m @ 850/1300nm
 (10Gbe) 300/60m @ 850/1300nm
 (40Gbe) 100m @850nm

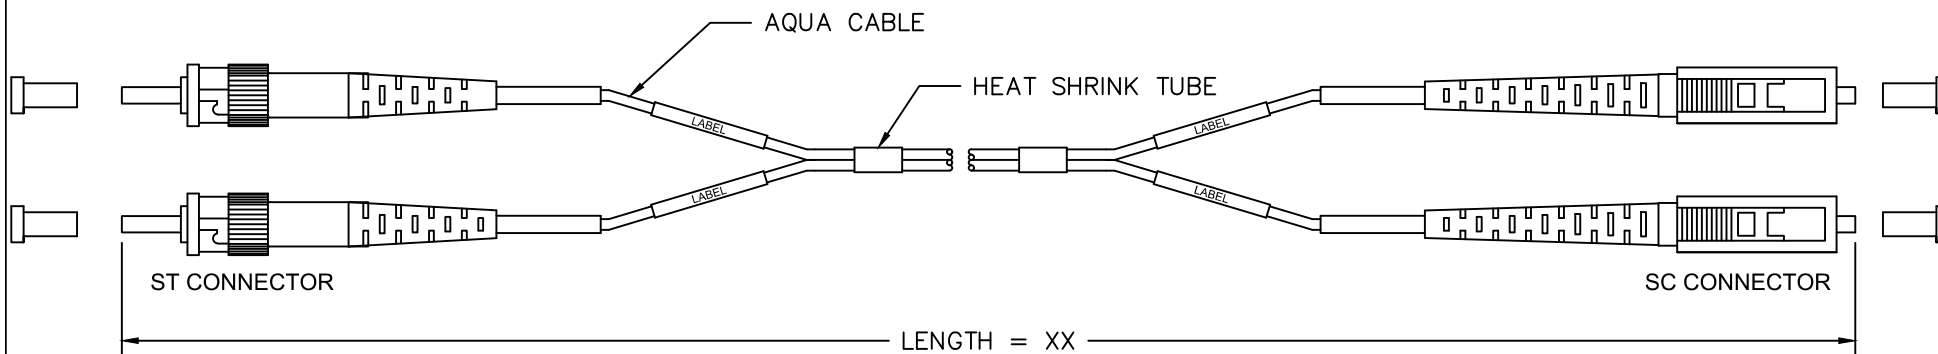

SPECIFICATIONS

PARAMETER	UNITS	
FERRULE ID	um	127
INSERTION LOSS	dB	≤ 0.2
DURABILITY (500 TIMES)	dB	≤ 0.2
OPERATING TEMPERATURE	°C	-20 ~ + 75
STORAGE TEMPERATURE	°C	-40 ~ + 85
TYPICAL CABLE OD	mm	Ø2.0

XX = LENGTH (METERS)

01 - 1 METER	08 - 8 METER
02 - 2 METER	09 - 9 METER
03 - 3 METER	10 - 10 METER
04 - 4 METER	15 - 15 METER
05 - 5 METER	20 - 20 METER
06 - 6 METER	25 - 25 METER
07 - 7 METER	30 - 30 METER

FEATURES:

1. ST CONNECTORS ARE COMPLIANT IEC 60874-14; F04 (JIS C5973); TIA/EIA-604-3A.
2. SC CONNECTORS ARE COMPLIANT IEC 60874-14; F04 (JIS C5973); TIA/EIA-604-3A.
3. PRODUCT QUALITY COMPLY WITH GR-326-CORE.
4. RoHS COMPLIANCE.



ALLEN TEL PRODUCTS, INC.
 30 TV5 DRIVE, HENDERSON, NEVADA 89014

**GBSTC-D4-XX 10Gb ST TO SC DUPLEX
 MULTIMODE 50/125 OM3 (AQUA JACKET)**