

CutBuddie™

Dustless Technologies®

Installation Instructions

DUST COLLECTION SYSTEM FOR RIGHT ANGLE GRINDERS


D1730 5" CutBuddie Complete Set D1750 7" CutBuddie Complete Set

INCLUDES:


- A. 1 - D1731 MAIN BODY (D1751 FOR 7")
- B. 1 - D5150 RELEASABLE TIE
- C. 3 - D1853 BUDDIE WASHER SET
- D. 1 - D5155 18" BLK HOSE
- E. 1 - D4001 ARBOR EXTENDER

PARTS:

- F. 1 - D5115 32 CLAMP 5" (D5125 44 CLAMP FOR 7")
- G. 3 - D1736 5" BOLT (D1758 FOR 7")
- H. 3 - D1732 5" NUT (D1850.5 FOR 7")
- I. 3 - D1737 5" ALUMINUM BRACKET (D1850.6 FOR 7")
- J. 3 - (H0263 5/16-18 SPACER NUT FOR 7" NOT SHOWN)

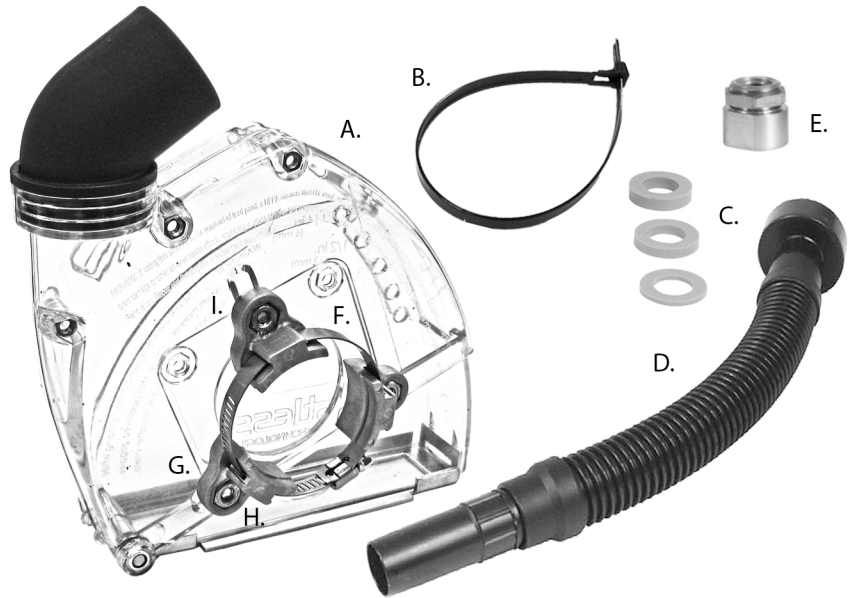

Installation Steps

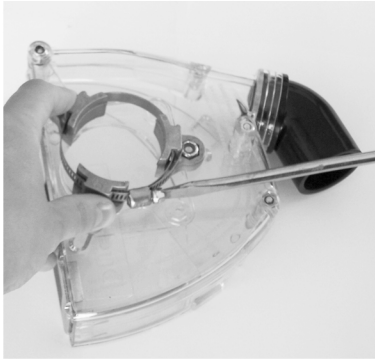


- 1.** Loosen band clamp.




- 2.** Slip CutBuddie around grinder's collar.



- 3.** Center CutBuddie to the arbor and tighten band clamp. Make sure lip on clamps fits in groove of collar. Install the arbor extender if needed.

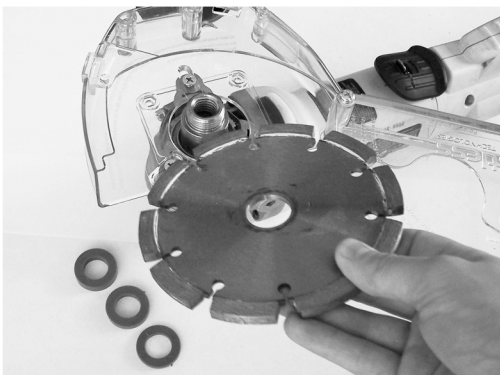

- 4.** Install wheel. Insert appropriate spacers to adjust /center wheel in the shroud for best performance. Make sure cut wheel is seated flat.

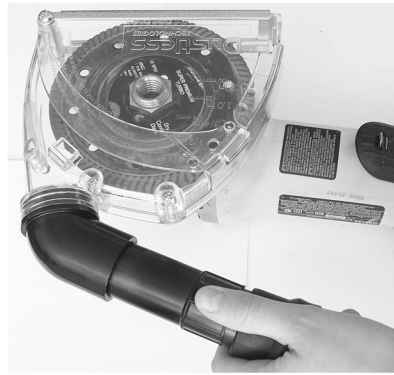

- 5.** Insert hose to port. Use releasable tie to secure hose & electrical cord together.



- 6.** Adjust the depth of the CutBuddie as needed by pushing down on the tab located on the side.

WARNING! If using this product in the removal of lead paint, asbestos, or other hazardous materials, a Dustless HEPA vacuum must be used. The removal of said materials may generate dust or fumes. Exposure to said materials may cause brain damage or other adverse health effects, especially in young children and pregnant women. Follow all federal, state and local laws including the U.S. Environmental Protection Agency's Renovation, Repair and Painting law or similar law.

Always make sure grinder is UNPLUGGED when removing or attaching CutBuddie. Before use, refer to your tool manual for warnings and instructions.


Dustless®

TECHNOLOGIES

800.568.3949
dustlesstools.com

INSTALLATION AND OPERATION VIDEOS AVAILABLE AT WWW.DUSTLESSTOOLS.COM

Tuckpointing

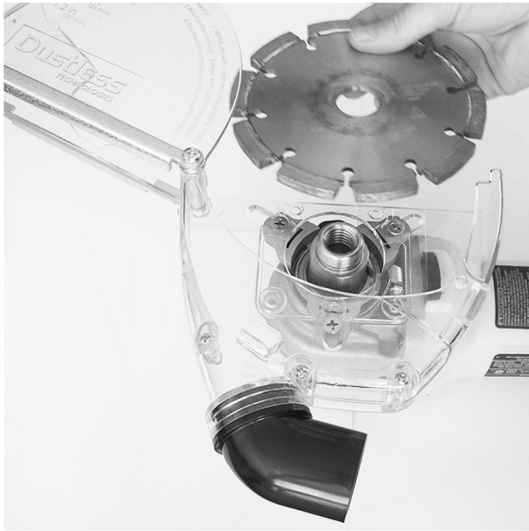

1. Follow Installation steps and install tuckpointing wheel.

Crack Chasing



1. Follow Installation steps and install crack chasing wheel.

WARNING! If using this product in the removal of lead paint, asbestos, or other hazardous materials, a Dustless HEPA vacuum must be used. The removal of said materials may generate dust or fumes. Exposure to said materials may cause brain damage or other adverse health effects, especially in young children and pregnant women. Follow all federal, state and local laws including the U.S. Environmental Protection Agency's Renovation, Repair and Painting law or similar law.

Always make sure grinder is UNPLUGGED when removing or attaching CutBuddie. Before use, refer to your tool manual for warnings and instructions.