

PROLINE® ATMOSPHERIC VENT 250 SERIES

FVIR COMPLIANT

- Our FVIR Safety System reduces the risk of accidental fires involving flammable vapors from products such as gasoline, paint thinner and solvents.

COMBINATION THERMOSTAT/ECO

- With factory-preset regulator.

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J.

DYNACLEAN™ DIFFUSER DIP TUBE

- Reduces lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.

PUSH-BUTTON PIEZO IGNITOR

- Makes lighting the pilot fast and easy with one-hand push-button spark ignition.

HEAT TRAP NIPPLES

- Factory-installed for faster installation.

BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a 1/4 turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes.
- Meets the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IES 90.1.
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act, (EPCA), as amended.

HIGH UNIFORM ENERGY FACTOR (UEF)

- Eco-Friendly non-CFC foam insulation, external heat traps and specially designed combustion chamber combine to produce a high UEF for maximum savings on operating costs.

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

MAXIMUM HYDROSTATIC WORKING PRESSURE 150 PSI

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 PSI test pressure and 150 PSI working pressure. Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type gas water heaters.

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to hotwater.com





COMMERCIAL-GRADE RESIDENTIAL GAS WATER HEATERS


Model Number	Nominal Gallon Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Natural Gas	BTU Input Propane Gas	Recovery 90°F Rise Gallon Per Hour	Dimensions in Inches							Approx. Shipping Weight (lbs)
								A	B	C	D	E	F	Draft Hood	
Tall Models															
GCR-30	30	29	63	0.63	35,500	N/A	37	61-1/2	58	18	12-1/4	8	51-3/4	3 or 4	132
GCR-40	40	38	80	0.64	40,000	N/A	42	61-3/4	58-1/4	20	12-1/4	8	52	3 or 4	138
GCGH-50	50	48	76	0.63	38,000	N/A	39	60-3/4	57-1/4	21	12 1/4	8	50-1/2	3 or 4	148
GCR-50	50	48	81	0.64	40,000	N/A	43	60-3/4	57-1/4	22	12-1/4	8	50-1/2	3 or 4	165
†GCRX-50	50	49	99	0.61	60,000	54,000	65	65-1/2	61	22	13-1/2	8	54-1/4	4	182
GCRX-55	55	55	83	0.62	60,000	54,000	65	59-3/4	55-1/4	24	13-1/2	8	48	4	185
Short Models															
GCRL-40	40	38	70	0.58	40,000	N/A	41	51-1/2	48	22	12	8	41-1/4	3 or 4	135
GCRL-50	50	50	78	0.62	40,000	N/A	43	53-1/4	49-3/4	24	13-1/4	8	41-3/8	3 or 4	177

Recovery capacities based on actual performance tests.


Water connection is 3/4" on all models

All models approved for installation from sea level to 10,100 ft. elevation.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

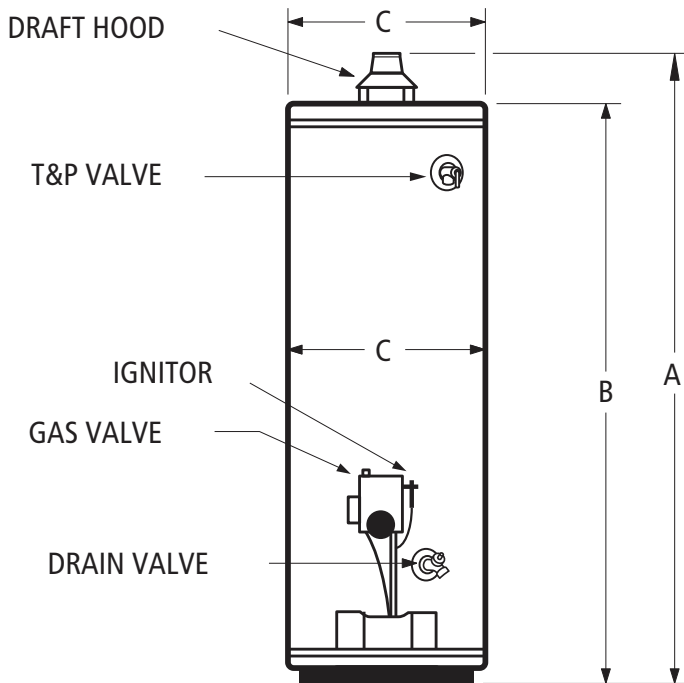

Top View:

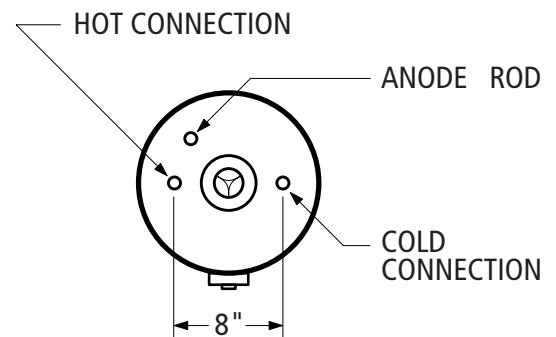

For technical information call 800-527-1953. A. O. Smith Corporation reserves the right to make product changes or improvements without prior notice.