

Lever Arms

Standard roller is hardened oil-impregnated sintered iron.
Bold-face Type numbers indicate the most commonly used lever arms.

Table 21.76: Lever Arm, Adjustable Length from 7/8" to 4"


Style	Type (Class 9007)								
	No Roller	Standard			Roller		Delrin	Nylon	Rubber Tire
		5/8" Dia. 1/4" Wide	5/8" Dia. 5/8" Wide	5/8" Dia. 1/4" Wide	11/16" Dia. 1/4" Wide	1" Dia. 5/8" Wide	1-5/8" Dia. 1/4" Wide	2" Dia. 1/4" Wide	2-1/8" Dia. 1/2" Wide
Non-bendable	HA0	HA1	HA2	HA4	HA24	HA22	—	—	—
Bendable	HA9	HA5	HA6	HA8	HA25	HA23	HA20	HA26	HA21

Table 21.77: 360° Angular Adjustable Lever Arms

Length of Arm	Catalog Number					
	Standard 5/8" Dia. 1/4" Wide		Standard 3/4" Dia. 1/4" Wide	Nylon 5/8" Dia. 1/4" Wide	Nylon 3/4" Dia. 1/4" Wide	Ball Bearing 11/16" Dia. 1/4" Wide
	Roller Outside	Roller Inside	Roller Outside		Roller Outside	
7/8"	9007AA1M	—	—	9007AA8M	—	—
1-3/8"	9007BA1M	9007BA5M	9007BA11M	—	—	—
1-1/2"	9007MA1M	9007MA5M	9007MA11M	—	9007MA18M	9007MA9M
2"	9007CA1M	9007CA5M	9007CA11M	9007CA8M	—	9007CA9M
2-1/2"	9007DA1M	—	9007DA11M	—	9007DA18M	—
3"	9007EA1M	9007EA5M	9007EA11M	9007EA8M	9007EA18M	9007EA9M

NOTE: Roller can be changed in the field from roller outside to roller inside position or vice versa.

Approximate shipping weights range from 1/8 to 1/4 lb.

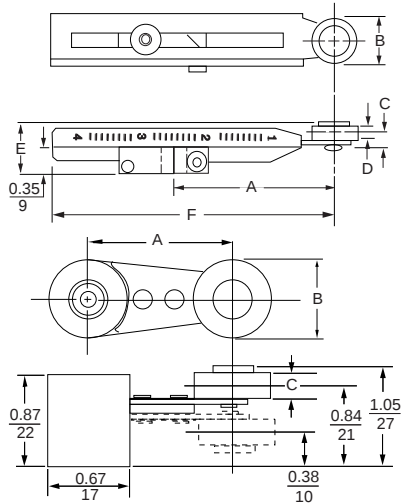

A = Length of Lever Arm; B = Roller Diameter; C = Roller Width


Special Features

Table 21.78: Special Features (do not apply to Type CR unless noted)—Field Installable

Description	Part Number
Conduit Seal Only	
Conduit seal fits in conduit entrance and excludes liquids	5 hole seal 3103248801 9 hole seal 3103281501
Adapters	
Switch with adapter plate permitting substitution of any Type C switch with standard box for any Type T switch with Style B baseplate	Form Y147
Adapter plate kit only (plate plus mounting screws) for above	9007BT1
Adapter plate for direct substitution of Type C plunger switches for Type B plug-in plunger switches— use only if there is a problem in lining up cam tracks	Standard Box 9007CT10 [11]
Metric conduit-connection adapter—male 1/2" NPT on one end, female 20 mm on the other end	9007CT12



Rotary lever arms

9007C*** A, B, C, N, T5, T10


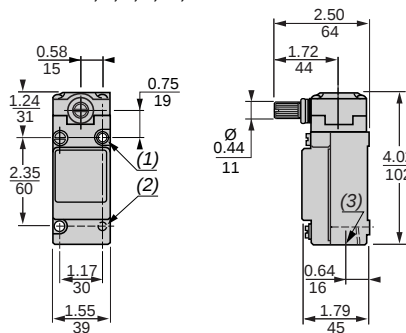


Rod type lever arms

9007FA1



9007FA9

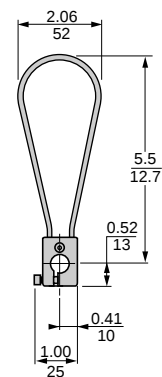

Dual dimensions:
in. / mm

- 2 x 0.20/5 x 0.22/6 HLS.
- 2 x 10-24 Tapped HLS Back Mtg 0.29/7 DP.
- 1/2 14 NPT.

[10] Recommended in place of Types HA3 and HA7 lever arms with steel rollers. If necessary these arms can be furnished at an additional cost.

[11] Dimensions: 0.22 x 2.94 x 1.54 in.