


# dahl-ECO mini-ball™ Valve

Plumbing

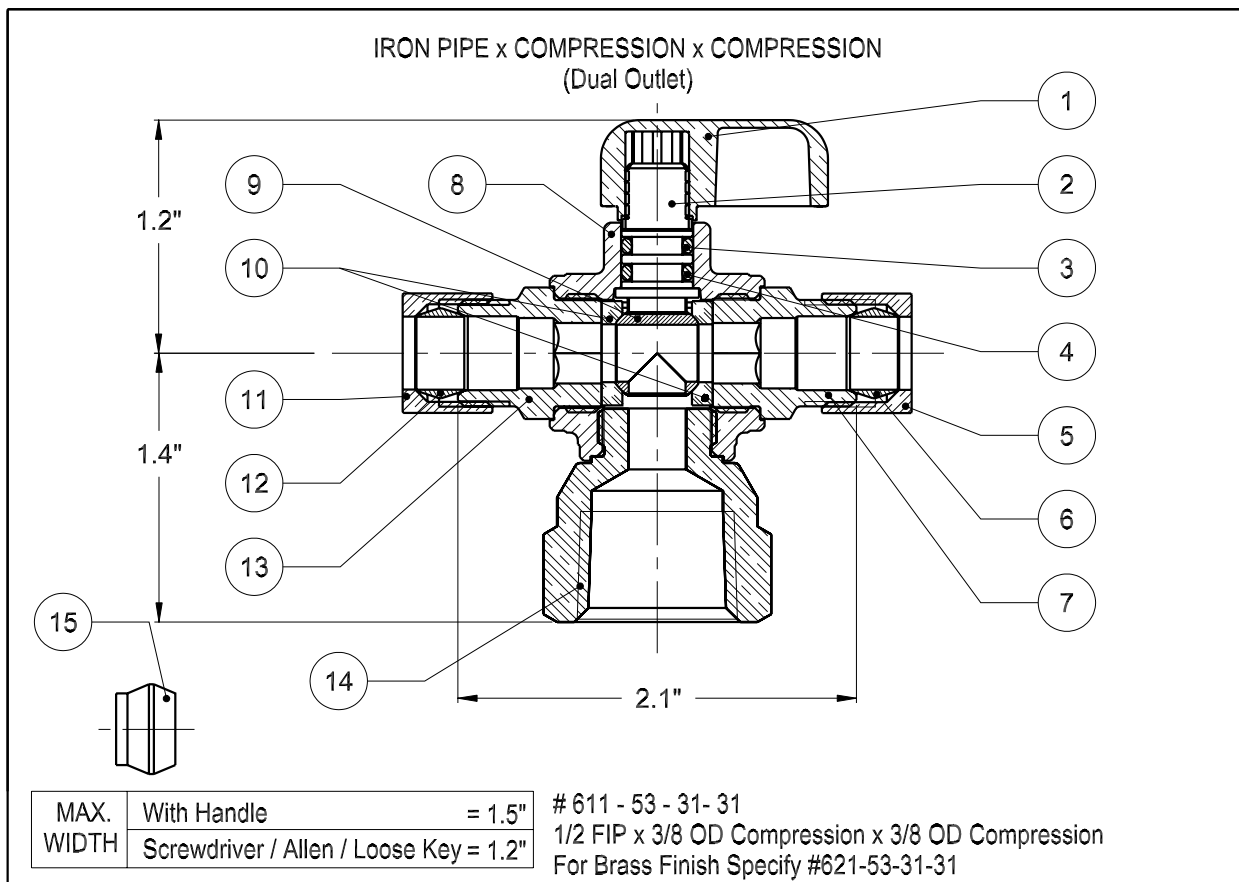

Text Below Represents Plated Configuration

- |                                                    |                                                     |
|----------------------------------------------------|-----------------------------------------------------|
| 1. Nickel Plated Zinc Handle                       | 9. C693 Plated Brass Ball                           |
| 2. C693 Nickel Plated Brass Spindle                | 10. Teflon* Seals                                   |
| 3. EPDM O-ring                                     | 11. Chrome Plated Brass 3/8 OD Compression Nut      |
| 4. Viton* O-ring                                   | 12. Brass Tapered Sleeve                            |
| 5. Chrome Plated Brass 3/8 OD Compression Nut      | 13. C693 Nickel Plated Brass 3/8 OD Compression End |
| 6. Brass Tapered Sleeve                            | 14. C693 Chrome Plated Brass 1/2 FIP End            |
| 7. C693 Nickel Plated Brass 3/8 OD Compression End | 15. C2745 Brass 3/8 OD Compression Plug             |
| 8. C693 Chrome Plated Brass Body                   |                                                     |

Working Pressure: 250 psi / 250°F  
depending on pipe material.

 , UPC®  
NSF / ANSI 61-G

Designed and Manufactured in  
Canada

Wetted surface area contains <0.1wt% weighted average lead.



## dahl brothers canada limited

2600 S. SHERIDAN WAY, MISSISSAUGA, ON, CANADA L5J 2M4  
905-822-2330 CAN 800-268-5355 U.S. 800-268-2363  
FAX(905) 855-1450, USA AND CANADA 800-226-1801  
[www.sales@dahlvalve.com](http://www.sales@dahlvalve.com) [www.dahlvalve.com](http://www.dahlvalve.com)