


dahl-ECO mini-ball™ Valve

Plumbing

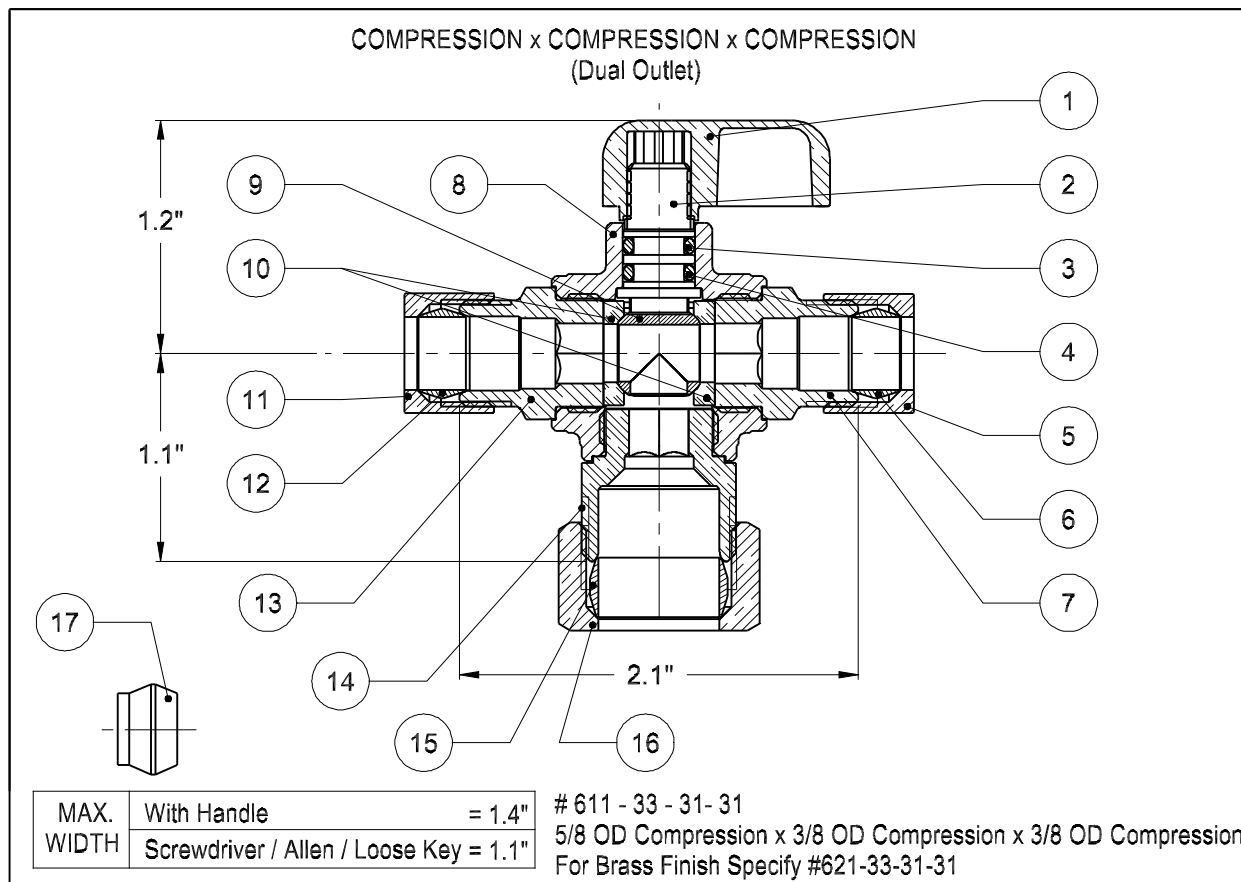

*Text Below Represents Plated Configuration

- | | |
|--|--|
| <ul style="list-style-type: none"> 1. Nickel Plated Zinc Handle 2. Nickel Plated C693 Brass Spindle 3. EPDM O-ring 4. Viton* O-ring 5. Chrome Plated Brass 3/8 OD Compression Nut 6. Brass Tapered Sleeve 7. Nickel Plated C693 Brass 3/8 OD Compression End 8. Chrome Plated C693 Brass Body 9. Plated C693 Brass Ball | <ul style="list-style-type: none"> 10. Teflon* Seals 11. Chrome Plated Brass 3/8 OD Compression Nut 12. Brass Tapered Sleeve 13. Nickel Plated C693 Brass 3/8 OD Compression End 14. Nickel Plated C693 Brass 5/8 OD Compression End 15. Brass Tapered Sleeve 16. Chrome Plated Brass 5/8 OD Compression Nut 17. C2745 Brass 3/8 OD Compression Plug |
|--|--|

Working Pressure: 250 psi / 250°F
depending on pipe material.

UPC
NSF / ANSI 61- G

Designed and Manufactured in
Canada

Wetted surface area contains <0.1wt% weighted average lead.



dahl brothers canada limited

2600 S. SHERIDAN WAY, MISSISSAUGA, ON, CANADA L5J 2M4
905-822-2330 CAN 800-268-5355 U.S. 800-268-2363
FAX(905) 855-1450, USA AND CANADA 800-226-1801
www.sales@dahlvalve.com www.dahlvalve.com