


THERM-X-SPAN[®]

Thermal Expansion Absorbers, T-Series (Non-ASME)

150 PSIG Working Pressure

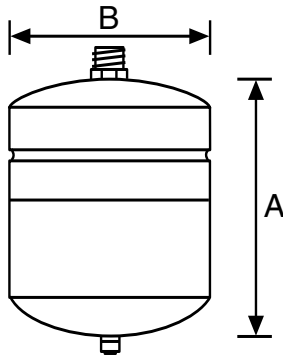

T-5, T-12



In-Line Models

| Model No. | Tank Vol. | | Max. Accept. Factor | A Height | | B Diameter | | Sys. Conn. NPTM | Ship Wt. | |
|-----------|-----------|------|---------------------|----------|--------------------------------|------------|------|-----------------|----------|------|
| | Lit. | Gal. | | cm | ins. | cm | ins. | | kg | lbs. |
| T-5 | 8 | 2.0 | 0.45 | 321 | 12 ⁵ / ₈ | 203 | 8 | 3/4 | 2.3 | 5 |
| T-12 | 17 | 4.4 | 0.73 | 381 | 15 | 279 | 11 | 3/4 | 4.0 | 9 |

Maximum Operating Conditions

| | |
|-----------------------|-------------------------------------|
| Operating Temperature | 200°F (93°C) |
| Working Pressure | 150 PSIG (10.5 kg/cm ²) |

Specifications

| Description | Standard Construction |
|-----------------------------|-----------------------------------|
| Standard Factory Pre-charge | 40 PSIG (2.8 kg/cm ²) |
| System Connection | Brass |
| Diaphragm | Butyl/EPDM |
| Liner Material | Polypropylene |

All dimensions and weights are approximate.

Job Name _____

Contractor _____

Location _____

Contractor P.O. No. _____

Sales Representative _____

Model No. Ordered _____

Engineer _____