


5" Round LED Inserts

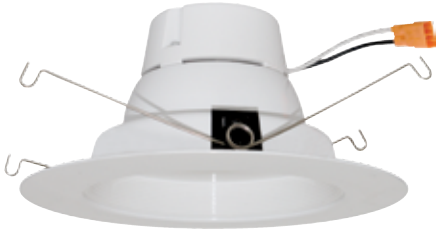


EL61030W	EL61040W	EL61130W	EL61140W	EL61230W*
875 lm	950 lm	1100 lm	1200 lm	1350 lm
3000K	4000K	3000K	4000K	3000K
12W	12W	16W	16W	22W

*Not for use in Shallow Housings

LED Insert Baffle Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Baffle reduces stray light
- Soft white lens provides smooth lumen distribution
- 5 Lumen packages, up to 1350 lm
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL560ICA, EL560RICA, EL570ICA, EL570RICA

Input Power	12W - 22W
Lumens	875 - 1350
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV
Beam Angle	90°



Medium Base Adapter Included



White	White	White
EL61527W	EL61530W	EL61535W
700 lm	730 lm	750 lm
2700K	3000K	3500K
11W	11W	11W

Bronze	Bronze
EL61527BZ	EL61530BZ
700 lm	730 lm
2700K	3000K
11W	11W


White	White
EL61540W	EL61550W
775 lm	800 lm
4000K	5000K
11W	11W

Bronze
EL61535BZ
750 lm
3500K
11W

LED Insert Reflector Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL560ICA, EL560RICA, EL570ICA, EL570RICA

Input Power	11W
Lumens	700 - 800
Color Temp.	2700K - 5000K
CRI	90+
Input Volt	120V
Damp Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter Included

6" Round LED Inserts




EL61030W	EL61040W	EL61130W	EL61140W	EL61230W*
875 lm	950 lm	1100 lm	1200 lm	1350 lm
3000K	4000K	3000K	4000K	3000K
12W	12W	16W	16W	22W

*Not for use in Shallow Housings

LED Insert Baffle Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Baffle reduces stray light
- Soft white lens provides smooth lumen distribution
- 5 Lumen packages, up to 1350 lm
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	12W - 22W
Lumens	875 - 1350
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Wet Location	UL listed
Dimmable	Triac/ELV
Beam Angle	90°



Medium Base Adapter Included



White	White	White
EL61527W	EL61530W	EL61535W
700 lm	730 lm	750 lm
2700K	3000K	3500K
11W	11W	11W

White	White
EL61540W	EL61550W
775 lm	800 lm
4000K	5000K
11W	11W




Bronze	Bronze
EL61527BZ	EL61530BZ
700 lm	730 lm
2700K	3000K
11W	11W

Bronze
EL61535BZ
750 lm
3500K
11W

LED Insert Reflector Trim

- Fits 5" or 6" dedicated 120V recessed housings
- Soft white lens provides smooth lumen distribution
- Medium base adapter included
- Life Span of 50,000 hours L70
- Compatible with EL760ICA, EL760RICA, EL770ICA, EL770RICA

Input Power	11W
Lumens	700 - 800
Color Temp.	2700K - 5000K
CRI	90+
Input Volt	120V
Damp Location	UL listed
Dimmable	Triac/ELV



Medium Base Adapter Included