


QFF SERIES

CEILING MOUNTED FAN FORCED HEATERS


- · HIGH CAPACITY UP TO 4800 WATTS
- DEPENDABLE AND QUIET
- SURFACE, RECESSED OR T-BAR MOUNTING
- OPTIONAL PNEUMATIC/ELECTRIC SWITCH,
 24- or 120-VOLT RELAY CONTROL, SP
 THERMOSTAT & TRANSFORMER RELAY KITS
- 14-GAUGE FRONT LOUVER GRILLE
- TAMPER-RESISTANT SCREWS
- BUILT-IN THERMAL CUTOUT & FAN DELAY
- A DOUBLE-POLE SINGLE THROW DISCONNECT SWITCH IS PROVIDED.

APPLICATIONS

Berko's high-capacity, heavy-duty fan forced ceiling heaters are designed for use almost anywhere in commercial, industrial or institutional areas requiring electric fan forced heaters in 1500 to 4800 watt capacity range where wall space is not available. They perform exceptionally well in such applications as entry ways, hallways, restrooms, stores, detention environments and similar large areas. They will accommodate pneumatic/electric or low voltage controls commonly used with computerized energy management systems. 1/4 inch mesh screen deters insertion of foreign objects.



Heavy duty 14-gauge louvered front cover grille with tamper resistant screws and 1/4 inch mesh screen.

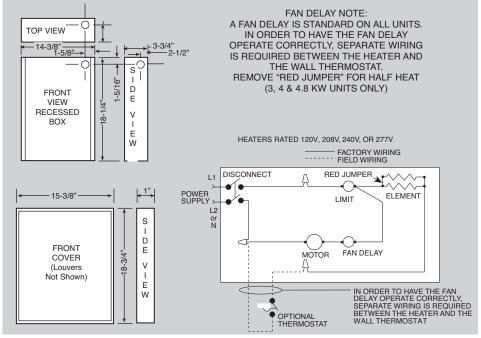

SELECTION CHART

CATALOG NUMBER	VOLTS	WATTS*	BTU/HR.	AMPS	SHIP WT. (LBS.)
QFF1500	120	1500	5120	12.5	
QFF3007	277	3000	10239	10.8	
QFF4008	208	4000	13652	19.2	
QFF4004	240	4000/2000 208	13652/10239 3000/1500	16.7/14.4	23
QFF4007	277	4000/2000 240	13652/10239 3000/1500	14.4/12.5	
QFF4804	240/208	4800/3600	16382/12287	20.0/17.3	23
QFF4807	277/240	4800/3600	16382/12287	17.3/15.0	

^{* -} Factory wired at higher wattage.

Air Movement 150 CFM

ACCESSORIES

CATALOG NUMBER	DESCRIPTION	SHIP WT. (LBS.)
QFFSM	Surface Mounting Sleeve	2
QFFR2 (24V)	Time delay relay, 45-60 seconds to close	
QFFR12 (120V)	when energized. Uses remote 24V or	2
	120V power source.	
QFFTBF	T-Bar Frame Kit.	1
QFFT1	Single Pole T-Stat. (Field Installed)	
QFFT2	Double Pole Thermostat. (Field Installed)	3
QFFTR4	208/240V Primary Transformer 24V Relay.	1
QFFTR7	277V Primary 24V Sec. Transformer Relay.	1

ZBL-BQFFO (03-06)