

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Closed one end and ¾" or 1" PEX F1960 on the other end. ½" PEX F1960 branches in a single row. Used with PEX-a potable water expansion systems.

The use of PEX tubing in a potable hot-water plumbing system with an operating temperature above 140°F (60°C) or system pressure above 80 psig (550 kPaG) or highly aggressive water quality or any combination thereof can significantly reduce the service life of the tubing.

HeatLink requires following the guidelines described in Plastics Pipe Institute TN-53, Guide to Chlorine Resistance Ratings of PEX Pipes and Tubing for Potable Water Applications and HeatLink INFO 37, Domestic Hot Water Recirculation Systems.

Qty	Stk. #	# of Ports	Inlet	Outlet	Dimension, in/(mm)						Weight, lb/(kg)	
					A	B	C	D	E	ID1		ID2
	EX13203	3	¾	Closed	5.37 (136.3)	0.94 (24.0)	0.86 (21.9)	1.25 (31.8)	0.56 (14.2)	0.60 (15.2)	0.41 (10.3)	0.080 (0.036)
	EX13204	4	¾	Closed	6.62 (168.1)	0.94 (24.0)	0.86 (21.9)	1.25 (31.8)	0.56 (14.2)	0.60 (15.2)	0.41 (10.3)	0.102 (0.046)
	EX13206	6	¾	Closed	9.11 (231.5)	0.94 (24.0)	0.86 (21.9)	1.25 (31.8)	0.56 (14.2)	0.60 (15.2)	0.41 (10.3)	0.146 (0.066)
	EX13804	4	1	Closed	6.92 (175.8)	1.18 (30.0)	0.58 (14.8)	1.84 (46.8)	1.50 (38.0)	0.79 (20.0)	0.39 (10mm)	0.146 (0.066)
	EX13806	6	1	Closed	9.41 (239.3)	1.18 (30.0)	0.58 (14.8)	1.84 (46.8)	1.50 (38.0)	0.79 (20.0)	0.39 (10mm)	0.208 (0.094)

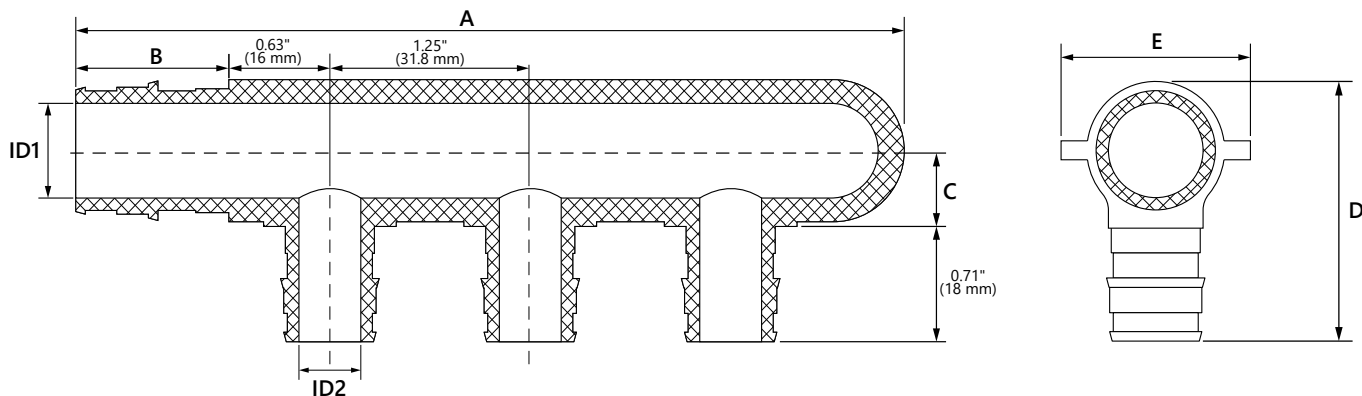

Technical Data

Specifications	
Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings

ICC-ES PMG 1087
cNSFus-pw
cQALus P371
U.P. Code

Codes

IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards

ASTM E84
ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty