

5/16" MOUNTING HOLES (3X)

100 AMP. RINGLESS METER SOCKET


5 CIRCUIT 100 AMP. LOAD CENTER
20 AMP BREAKER 2-POLE
20 AMP BREAKER 1-POLE
20 AMP BREAKER 1-POLE

6-20R 20AMP.
RECEPTACLE

5-20R2GFCI
20AMP. DUPLEX (2X)


WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	-----	6-1/0	-----	6-1/0
LOAD	14-10	14-10	-----	-----
NEUTRAL LARGE HOLE	12-8	12-1/0	10-8	10-1/0
NEUTRAL SMALL HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2

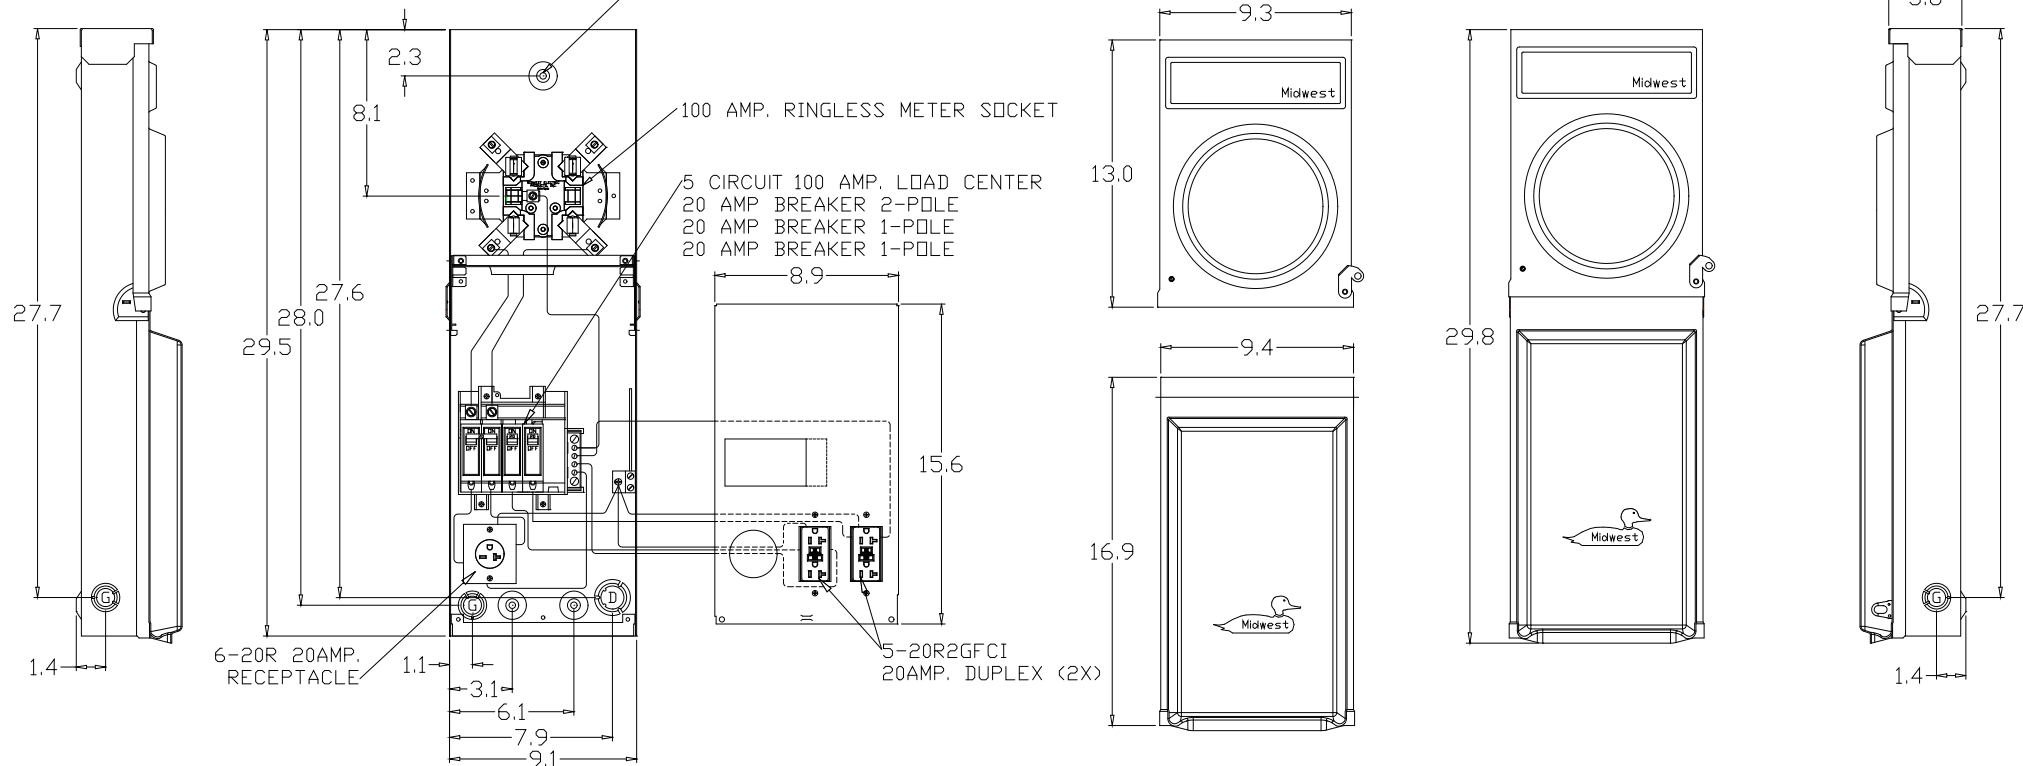

KNOCKOUT TABLE:

G= 1/2", 3/4", 1" KO
B= 1", 1-1/4", 1-1/2" KO
D= 3/4", 1", 1-1/4" KO
H= 9/32" KO

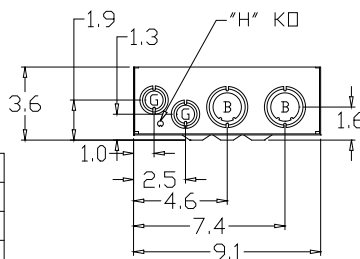

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Dr. By: JDE

Ck. By:

CR: R0814112

* = Critical To Quality

Unless Otherwise
Specified

Tolerances On:
3 Pl. Decimals ± .010
2 Pl. Decimals ± .030
Fractions ± 1/32
Angles ± 1/2°
Holes ± .003

Dimensions Are In Inches

AutoCad
Generated

SCALE

1 : 1

SIZE

A

SHEET 1

OF 1

TITLE:

R038C010
OUTLINE DRAWING

DWG NO:

265A6227

SH38

Rev.1 CR R0814112 JE 2-18-08