

Catalog Number: U4778-X-BL

UPC Code:

Item Description: 320A 4T RL SWY STUD HD

784572260085

Brand Name: Milbank

Type: Ringless Meter Socket

Application: Meter Socket

Standard: UL Listed

Voltage Rating: 600 Volts Alternating Current

Amperage Rating: 320 Ampere Continuous

Phase: 1 Phase

Frequency Rating: 60 Hertz

Cable Entry: Overhead and Underground

Terminal: 3/8 Inch Stud Line Side and 3/8 Inch

Stud Load Side

Mounting: Surface Mount

Enclosure: Type 3R, G90 Galvanized Steel with

Powder Coat Finish

Additional Specifications: Number of Jaws:4 Terminal

Hub Opening and Closing Plates:Large Closing Plate


Bypass Provision:Lever Bypass


Barrel Lock Provision:9/16 Inch Knockout and Angle Bracket for Barrel Lock Provision

Number Positions: 1 Position



FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	6	U/L MNTG.EMBOSS
В	1	1/4 SOLID K.O.
С	1	1/2, 3/4, 1 CONC. K.O.
D	2	2, 21/2, 3 CONC. K.O.
E	2	2, 2½, 3, 3½, 4 CONC. K.O.
	ITEM A B C D	ITEM QTY A 6 B 1 C 1 D 2 E 2

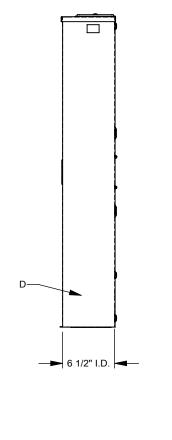

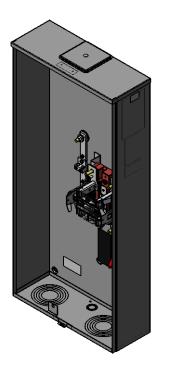




Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

1

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.



— 17 3/4" O.D. ——

38 3/4"