




RIGID-IMC FITTINGS

ALUMINUM THREADED CONDUIT BODIES

[Download
Specification Sheet
\(\[https://www.sepco-usa.com/wp-content/uploads/2017/03/page_042.pdf\]\(https://www.sepco-usa.com/wp-content/uploads/2017/03/page_042.pdf\)\)](#)



[Print](#)

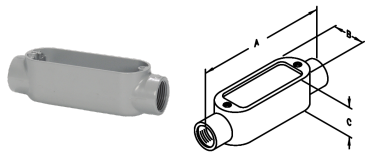

C1A

Trade Size	1/2"
Dim A	4.69
Dim B	1.38
Dim C	1.31
MAX WIRE SIZE	N/A
VOL. CU.IN.	4.35
Unit Pack	10
Master Pack	50
Lbs. / 100 Pcs.	21
UPC	43015 C-41, C15, 59405B,
Competitor	C50, LC-50,
Part Number	LC-50, C- 50A, AC-1- RD, AC1, C1

APPLICATION FEATURES

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC

Tapered threaded hubs (NPT)

Raintight when used with gasketed covers

Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.

Flat back design for easy mounting close to walls

STANDARD MATERIALS STANDARD FINISH

1/2" – 2"
Die cast/Copper-free Aluminum
2-1/2" – 4"
Sand-cast/Copper-free Aluminum

Aluminum
Enameled

UL LISTED

E198259

