




RIGID-IMC FITTINGS

ALUMINUM THREADED CONDUIT BODIES

[Download
Specification Sheet
\(https://www.sepco-
usa.com/wp-
content/uploads/2017/03/page_043.pdf\)](https://www.sepco-usa.com/wp-content/uploads/2017/03/page_043.pdf)



[Print](#)

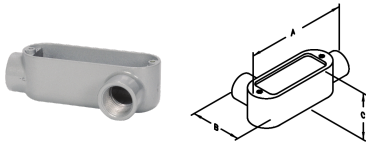

LL8A

Trade Size	3"
Dim A	12.81
Dim B	5.75
Dim C	4.50
MAX WIRE SIZE	3 #350 MCM
VOL. CU.IN.	186.00
Unit Pack	-
Master Pack	1
Lbs. / 100 Pcs.	439
UPC	41085
	LL-48, LL85,
Competitor	LL300, LL-
Part Number	300, LL- 300A, ALL- 8, ALL8, LL8

APPLICATION FEATURES

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC

Tapered threaded hubs (NPT) Raintight when used with gasketed covers

Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.

Flat back design for easy mounting close to walls

STANDARD MATERIALS STANDARD FINISH

1/2" – 2"
Die cast/Copper-free Aluminum
2-1/2" – 4"
Sand-cast/Copper-free Aluminum

Aluminum
Enameled

UL LISTED

E198259

