




RIGID-IMC FITTINGS

ALUMINUM THREADED CONDUIT BODIES

[Download
Specification Sheet](#)
(https://www.sepco-usa.com/wp-content/uploads/2017/03/page_043.pdf)



[Print](#)

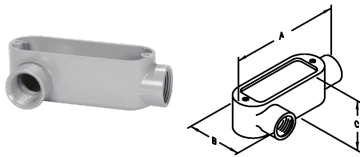

LR10A

Trade Size	4"
Dim A	15.62
Dim B	11.69
Dim C	5.63
MAX WIRE SIZE	3 #350 MCM
VOL. CU.IN.	308.00
Unit Pack	-
Master Pack	1
Lbs. / 100 Pcs.	902
UPC	42105
Competitor	LR-50, LR105, LR400, LR- 400, LR- 400A, ALR- 10, ALR10, LR10
Part Number	

APPLICATION FEATURES

To provide access to conductors for pulling, splicing, when used and maintenance. Threaded for rigid conduit and IMC Tapered threaded hubs (NPT) Raintight with gasketed covers Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy. Flat back design for easy mounting close to walls

STANDARD MATERIALS STANDARD FINISH

1/2" – 2" Aluminum
Die Enameled
cast/Copper-free
Aluminum
2-1/2" – 4"
Sand-cast/Copper-free
Aluminum

UL LISTED

E198259

