




RIGID-IMC FITTINGS

ALUMINUM THREADED CONDUIT BODIES WITH COVER AND GASKET

[Download
Specification Sheet](#)
(https://www.sepco-usa.com/wp-content/uploads/2017/03/page_046-1.pdf).

[Print](#)

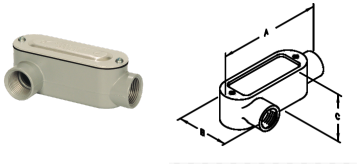

LR1ACG

Trade Size	1/2"
Dim A	4.31
Dim B	2.06
Dim C	1.38
MAX WIRE SIZE	N/A
VOL. CU.IN.	4.35
Unit Pack	10
Master Pack	50
Lbs. / 100 Pcs.	23
UPC	10099
	LR-50ACGA, LR-41CG, 58905,
Competitor	LR50CG,
Part Number	LRLA-50, LR-50ACG, DALR-1-CG,

LR1CG

APPLICATION FEATURES

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC

Tapered threaded hubs (NPT) Assembled with neoprene gasket and stamped cover Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy. Flat back design for easy mounting close to walls

STANDARD MATERIALS

STANDARD FINISH

1/2" – 2" Die cast/Copper-free Aluminum 2-1/2" – 4" Sand-cast/Copper-free Aluminum

Aluminum Enameled

UL LISTED

E198259

