


ALUMINUM RACEWAY

Quick Selection Guide


Two-Piece Small Single- & Dual-Channel Raceway Profiles

AL2000 Series™ Raceway

AL2000B & AL2000C




CAPACITY: 1.1 in.² (710mm²)




AL2400 Series™ Raceway

AL2400B & AL2400C




CAPACITY: 1.7 in.² (1097mm²)




AL3300 Series™ Raceway

AL3300B & AL3300C



CAPACITY: 4.40 in.² (2389mm²)




Capacity with Offset Divider

1.35 sq. in. (871mm²)


Capacity with 1/2 Divider -
2.2 sq. in. (1419mm²)

Capacity Undivided -
4.4 sq. in. (2839mm²)


AL3300 w/Half Divider



AL3300 w/Offset Divider



AL3300 with Offset Divider

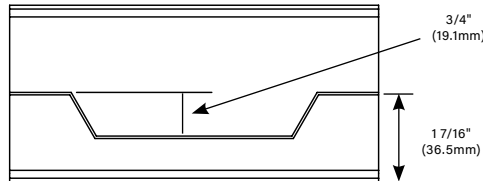


Two-Piece Large Single- & Dual-Channel Raceway Profiles

ALA3800 Series™ Raceway

ALA3800 & ALAC-5




CAPACITY: 5.96 in.² (3842mm²)




ALA4800 Series™ Raceway

ALA4800 & ALAC-5




CAPACITY:
Each Compartment
6.04 in.² (3895mm²)

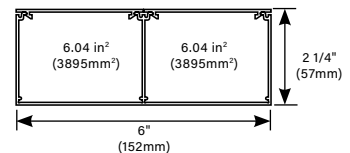

ALA3800 SERIES™ RACEWAY


ALA3800 Series Raceway Ordering Information

ALA3800B-10 Single Compartment Raceway Base




Satin Anodized finish. Nominal wall thickness of .078" (1.99mm). Packed four 10' (3m) lengths per carton.

ALA3810B1 Entrance End Fitting




For feeding raceway, has concentric 1/2" and 3/4" trade size knockouts.

ALAC-5 Raceway Cover




Satin Anodized finish. Nominal wall thickness of .078" (1.99mm). Packed eight 5' (1.50m) lengths per carton. ALAC-5 is compatible with ALA3800 and ALA4800 Series Raceways.

ALA3806 Cover Clip




Covers seam where lengths of raceway come together.

ALAWC Wire Clip




Holds conductors in place in long raceway runs. Snaps into grooves on base.

ALA3811 Flat Elbow




For making a 90° flat turn in a raceway run. Includes two ALA01 Couplings.

ALA01 Couplings




Joins lengths of inline ALA3800B-10 Raceway Base together.

ALA3815 Tee




For branch connections of two runs of ALA3800 Series Raceway. Includes three ALA01 Couplings.

ALA11RI Radiused Insert




A radiused insert for the ALA3811 and ALA4811 flat elbow to provide a bend radius of 2" (51mm) for Fiber Optic/ Category 5e installations. The insert is ideal for new and retrofit applications whether the cable installation is lay-in or pull-through.

ALA3817 Internal Elbow




For making a 90° internal turn in a raceway run. Includes two ALA01 Couplings.

ALA17/18RI Radiused Insert




A radiused insert for ALA3817, ALA4817, ALA3817N, ALA4817N, ALA3818, and ALA4818 fittings to provide a bend radius of 2" (51mm) for Fiber Optic/ Category 5e installations. The insert is ideal for new and retrofit applications whether the cable installation is lay-in or pull-through.

ALA3817N Inverted Internal Elbow




For connecting a vertical run of ALA3800 Series Raceway with a horizontal run with its cover facing up. Includes two ALA01 Couplings.

ALA3810B Blank End Fitting



Closes off open end of raceway.

ALA3818 External Elbow




For making a 90° external turn in a raceway run. Includes two ALA01 Couplings.

ALA4800 SERIES™ RACEWAY


ALA4800 Series Raceway Ordering Information

ALA4800B-10 Dual Compartment Raceway Base




6063-T5 extruded aluminum, satin anodized finish, .078" (1.98mm) wall thickness. Base has integral divider for separation of service. Packed 40' (12m) per carton.

ALA4810B Blank End Fitting




For covering ends of raceway.

ALAC-5 Raceway Cover




6063-T5 extruded aluminum, satin anodized finish, .078" (1.98mm) wall thickness. Two covers per base. Allows only one compartment to be accessed at a time. Packed 40' (12m) per carton. ALAC-5 is compatible with ALA4800 Series and ALA3800 Series Raceways.

ALA4810B2 Entrance End Fitting




For feeding raceway, has two concentric 1/2" and 3/4" trade size KOs.

ALAWC Wire Clip




For holding conductors in place in long raceway runs. Snaps into grooves in base.

ALA4811 Flat Elbow




Makes 90° flat turn in a raceway run. Includes four ALA01 Couplings.

ALA01 Couplings




Joins lengths of inline ALA4800B-10 Raceway Base together. Two required per section of base.

ALA4815 Tee




For branch connections of two runs of ALA4800 Series Raceway. Includes six ALA01 Couplings.

ALA4806 Cover Clip




Stainless steel clip to cover joint where lengths of cover or base come together.

ALA4817 Internal Elbow




To make an internal turn in a raceway run. Includes four ALA01 Couplings.

ALA09 Grounding Adapter



For connection of equipment grounding conductor to provide additional ground to raceway.

ALA17A Internal Corner Coupling



For butting two raceway sections to form an internal 90° turn in a raceway run.

NOTE: These parts are compatible with both ALA4800 and ALA3800 Series Raceways.