


SWITCHES


Toggle Switches: Maintained Contact Single & Double Pole

TERMINAL POSITIONS

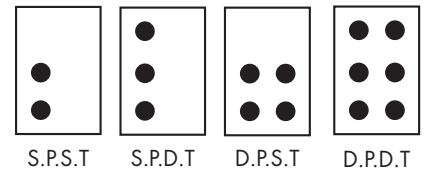

FEATURES

- *Amperage and voltage are also valid for D.C. Rating.
- **Lighted toggle and Poly (Polycarbonate).

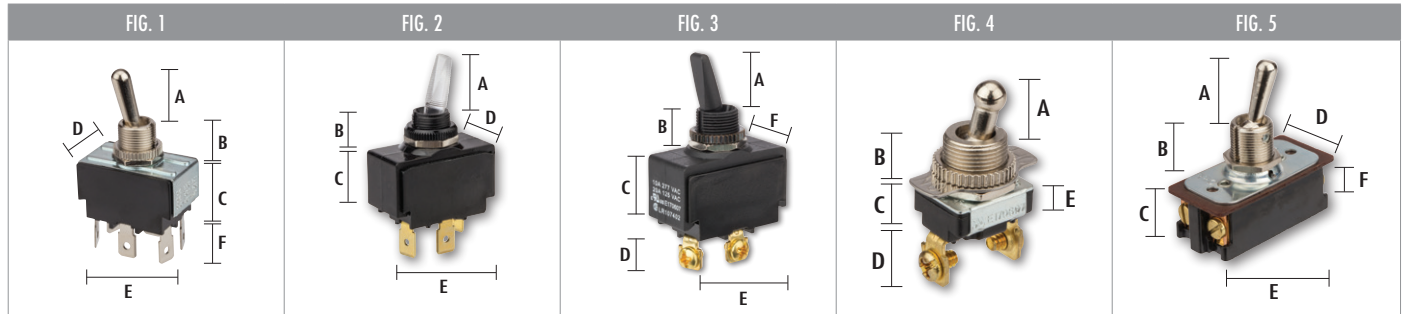

CAT. NO.	FIG. NO.	CIRCUIT FUNCTIONS	POLES & THROWS	AMPS 125VAC	RATINGS AMPS 250VAC	H.P. 125-250VAC	ACTUATOR STYLE	ACTUATOR MATERIAL	ACTR. CONTACT	CONN. TYPE	STD. CTN. QTY.
78220TS	1	ON-OFF	DPST	20	10	3/4	Bat	Brass/Nickel	—	Screws	5
78130TQ	1	ON-OFF	DPST	20	10	3/4	Bat	Brass/Nickel	—	0.250 Quikconnect	5
78090TQ	1	ON-ON	DPDT	15	10	—	Bat	Brass/Nickel	—	0.250 Quikconnect	5
78270TS	1	ON-ON	DPDT	20	10	1½@125.2@250	Bat	Brass/Nickel	—	Screws	5
78230TS	1	ON-OFF-ON	DPDT	10	20	1 1/2	Bat	Brass/Nickel	—	Screws	5
78240TS	1	OFF(ON)	DPST	15	10	3/4	Bat	Brass/Nickel	Momentary	Screws	5
78250TS	1	ON-OFF-(ON)	DPDT	15	10	3/4	Bat	Brass/Nickel	Momentary	Screws	5
78260TS	1	(ON)-OFF-(ON)	DPDT	15	10	3/4	Bat	Brass/Nickel	Momentary	Screws	5
Dimensions (IN)	1	A: 0.687	B: 0.465	C: 0.778	D: 0.750	E: 1.308	F: 0.422	THREAD: 15/32-32UNS-2A	KEYWAY: 0.072 X 0.038		
78065TS	2	ON-OFF	SPST	6	3	—	Bat	Nickel	—	Screws	5
78040TQ	2	ON-OFF	SPST	15*	10*	3/4	Flat	Poly. (Red)**	—	0.250 Quikconnect	5
Dimensions (IN)	2	A: 0.715	B: 0.379	C: 0.865	D: 0.750	E: 0.422	THREAD: 15/32-32UNS-2A	KEYWAY: 0.072 X 0.038 DP			
78280TS	3	ON-OFF	SPST	16*	8*	1	Bat	Brass/Nickel	—	Screws	5
78015TS	3	ON-OFF	SPST	20	10	—	Flat	Nylon	—	Screws	5
Dimensions (IN)	3	A: 0.687	B: 0.280	C: 0.687	D: 0.375	E: 1.000	F: 0.588	KEYWAY: 0.072 X 0.038			
78050TQ	4	ON-OFF	SPST	20	10	3/4	Bat	Brass/Nickel	—	0.250 Quikconnect	5
78130TS	4	ON-OFF	SPST	6	3	—	Ball	Brass/Nickel	—	Screws	5
78150TS	4	ON-OFF	SPST	20	10	3/4	Spade	Brass/Nickel	—	Screws	5
Dimensions (IN)	4	A: 0.687	B: 0.465	C: 0.585	D: 0.522	E: 0.312	THREAD: 15/32-32UNS-2A	KEYWAY: 0.072 X 0.038			
78290TS	5	ON-OFF	DPST	16*	8*	1	Bat	Brass/Nickel	—	Screws	5
Dimensions (IN)	5	A: 0.687	B: 0.465	C: 0.765	D: 0.836	E: 1.750	F: 1.764	THREAD: 15/32-32UNS-2A	KEYWAY: 0.072 X 0.038		

() = Momentary Position.