



DISCAL®

MICRO-BUBBLE AIR SEPARATORS

CALEFFI
Hydronic Solutions



Heating & Cooling

Components for today's modern hydronic systems



PRODUCT FEATURES

■ Anti-rotation/anti-vibration pinned float:

Creates space between float and air vent wall to prevent float hang-up from debris or variations in separator installation orientation.

■ Large-diameter chamber:

Slows fluid flow dramatically. Combines with concentric, sharp-edged mesh design to cause micro-bubbles to efficiently collect and coalesce. Highly effective automatic air elimination.

■ Anti-corrosion coalescing mesh:

Constructed of glass-filled nylon. More resistant to dissolved oxygen and acidic fluids than plated metals.

■ Robust stainless steel float linkages:

Reliable float alignment even during turbulent conditions such as filling from bottom.

■ Corrosion resistant:

All components highly resistant to hydronic chemical additives or unstable pH fluid.

■ Optional service check valve:

Allows expansion tank removal without purging system.

High performance, long-lasting air elimination

Dissolved oxygen and other gasses within hydronic systems can cause excessive corrosion and sediment formation. The Caleffi DISCAL® micro-bubble coalescing air separator with high discharge capacity and unique chamber design, automatically and efficiently rids system gasses. A very robust design and 100% anti-corrosion components enable DISCAL® to provide a long, trouble free life.

PRODUCT RANGE - DISCAL®

SIZES	MAX. FLOW RATE: (GPM)*	CODE				
		NPT	SWEAT	PRESS	NPT COMPACT**	SWEAT COMPACT**
¾"	6	551005A(C)	--	--	551003A(C)	551022A(C)
1"	10	551006A(C)	551028A(C)	551066A(C)	--	--
1¼"	15	551007A(C)	551035A(C)	551067A(C)	--	--
1½"	22	551008A(C)	551041A(C)	551068A(C)	--	--
2"	39	551009A(C)	551054A(C)	551069A(C)	--	--

*4 feet per second fluid velocity.

**SST mesh.


(C) automatic ½" service check valve included.




PERFORMANCE

MAX. WORKING PRESSURE	150 psi (10 bar)
WORKING TEMPERATURE RANGE	32 — 250°F (0-120°C)
MAX. PERCENTAGE OF GLYCOL	50%
AIR SEPARATION EFFICIENCY	up to 100%

CONSTRUCTION

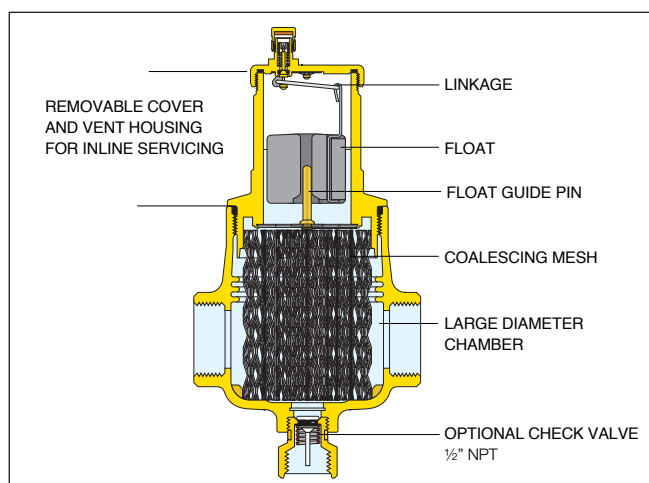

APPLICATION DIAGRAM

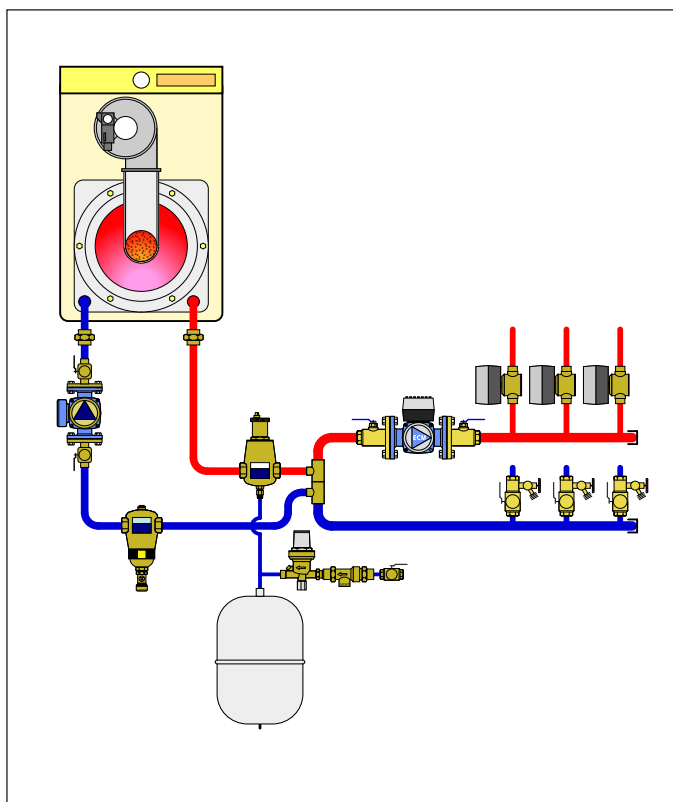

Caleffi Partner:



CALEFFI
Hydronic Solutions

03603-18 NA

WE RESERVE THE RIGHT TO CHANGE OUR PRODUCTS AND THEIR RELEVANT TECHNICAL DATA, CONTAINED IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.

Caleffi North America, Inc.
sales@caleffi.com · www.caleffi.com
© Copyright 2018 Caleffi North America, Inc.