




BTCGC250, Mechanical Ground Clamp for Cable Tray

By Burndy
Catalog # [BTCGC250](#)

TRAY CLAMP 250 KCMIL - 6, Material : Aluminum, Tin plated finish.

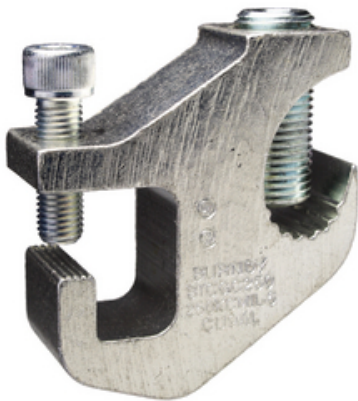

Features

- Tin plated aluminum for durable, long lasting corrosion resistance
- cULus 467 Listed for Grounding and Bonding in US and Canada
- cULus 2703 Listed for solar PV applications in US and Canada
- Accommodates most popular styles of cable tray with inside or outside flange
- Quick and easy installation
- no drilling or special tools required
- Set screw bonds clamp to the cable tray while another set screw securely fastens the grounding conductor to the clamp providing vibration resistance and outstanding pull-out values
- Grounding green hardware as required in Section 8.4 of UL2703

General

Catalog Number	BTCGC250
UPC	621945468818

Dimensions

Dimensions	2.25 in x .88 in x 2.43 in
Height	2.43 in
Length	2.25 in
Width	.88 in

Conductor Related

Conductor - AL Str Size Range	250Kcmil - 6 AWG
Conductor - Copper Str Size Range	250Kcmil - 6 AWG

Certifications And Compliance

Certification - CSA Approved	No
UL Listed	Yes

Logistics

Minimum Pack Quantity	1
-----------------------	---

Product Assets

[Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)
[Catalogs - BURNDY Master Catalog - Section E2 - Mechanical Grounding](#)
[Customer Notices - Prop 65 Notice](#)
[Interactive Catalog - BURNDY Full-Line Digital Catalog](#)
[Sales Drawings - 50072428](#)



A Hubbell brand

©2024 Hubbell Incorporated. All rights reserved
BRDY-BTCGC250-SPEC-EN | REV 6/2024