



EMERGI-LITE

Indulux

Reinforcing industrial
design environment





INDULUX ESCAPE ROUTE SIGNALISATION

Rugged for the factory – sleek enough for the office. Stainless steel tubular luminaires resist dust and water with easy-to-maintain sliding covers, even in extreme conditions. Durable LED lighting that's easy to install and looks great anywhere you need to mark the way to safety. Indulux: reinforcing industrial design environments.



316L Stainless steel


Indulux

Industrial & design

Indulux

Easy to install

Mounting, wiring and expanding flexibility

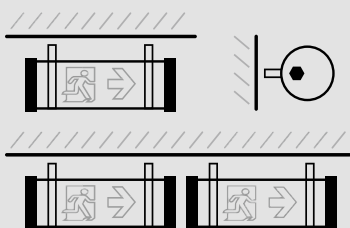

Indulux

Reliable in extreme conditions


Stainless steel solution resisting dust & water (IP68)



Indulux

Speed up your projects

Rapid maintenance with sliding electronic base module

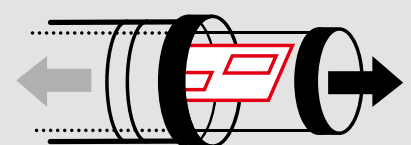

Indulux escape route signalisation

Industrial & design



Indulux escape route signalisation

- **Easy to install**
Mounting, wiring and expanded flexibility
- **Reliable in extreme conditions**
Stainless steel solution resisting dust and water (IP68)
- **Speed up your projects**
Rapid maintenance with sliding electronic base module




Luminaire

Order code	Description	Input voltage	Lamp type	Lamp output (lm)	Power consumption (VA/W)	Operation / duration (hrs)	Environment temp. (°C)	Weight (kg)
CTIND3LS5	Indulux LED S/S M3 CT	220-240 AC 50Hz	1 x LED 4W	200	7.5 / 3.5	3	0-40	1.6
CTIND3LS5DS	Indulux LED D/S M3 CT	220-240 AC 50Hz	2 x LED 4W	400	15 / 7	3	0-40	2.0
IND1LS5	Indulux LED S/S 230V Slave	220-240 AC/DC 0-60Hz	1 x LED 4W	400	7 / 6.5	230V	-25-40	1.4
IND1LS5DS	Indulux LED D/S 230V Slave	220-240 AC/DC 0-60Hz	2 x LED 4W	800	14 / 13	230V	-25-40	1.4
IND1LS5DSLTC	Indulux LED D/S 230V LTC	220-240 AC 50/60Hz	2 x LED 4W	800	14 / 13	230V	-25-40	1.4
IND1LSLTC	Indulux LED S/S 230V LTC	220-240 AC 50/60Hz	1 x LED 4W	400	7 / 6.5	230V	-25-40	1.4
IND3LS5	Indulux LED S/S M3 ST	220-240 AC 50Hz	1 x LED 4W	200	7.5 / 3.5	3	0-40	1.6
IND3LS5DS	Indulux LED D/S M3 ST	220-240 AC 50Hz	2 x LED 4W	400	15 / 7	3	0-40	2.0

Configurable pictograms included

Accessoires

Order Code	Description
102601K	Indulux Cable Entry Cover Kit
102702K	Indulux Battery replacement

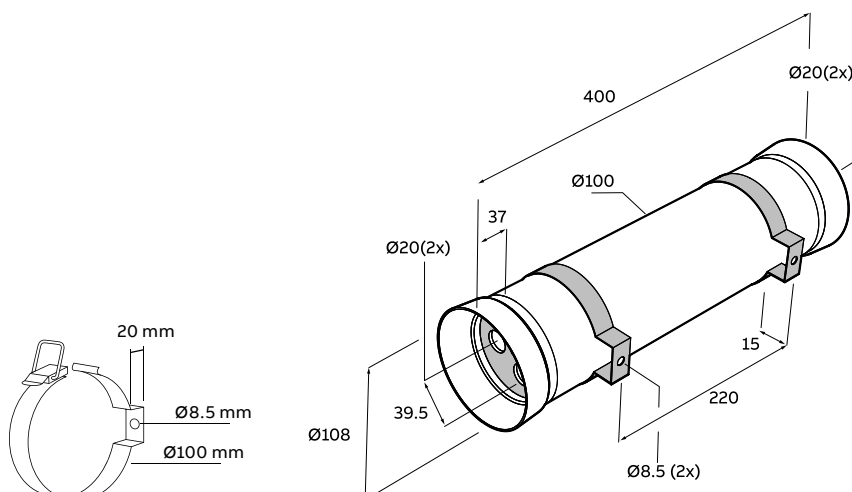




Indulux escape route lighting

Industrial & design



Indulux escape route lighting

- **Easy to install**
Mounting, wiring and expanded flexibility
- **Reliable in extreme conditions**
Stainless steel solution resisting dust and water (IP68)
- **Speed up your projects**
Rapid maintenance with sliding electronic base module

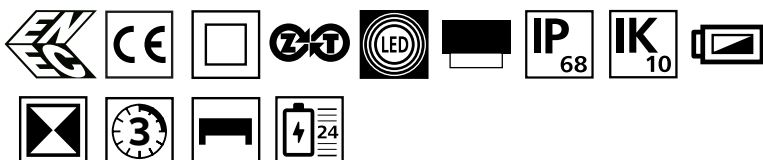

Luminaire

Order code	Description	Input voltage	Lamp type	Lamp output (lm)	Power consumption (VA/W)	Operation / duration (hrs)	Environment temp. (°C)	Weight (kg)
CTIND3LS5	Indulux LED S/S M3 CT	220-240 AC 50Hz	1 x LED 4W	200	7.5 / 3.5	3	0-40	1.6
CTIND3LS5DS	Indulux LED D/S M3 CT	220-240 AC 50Hz	2 x LED 4W	400	15 / 7	3	0-40	2.0
IND1LS5	Indulux LED S/S 230V Slave	220-240 AC/DC 0-60Hz	1 x LED 4W	400	7 / 6.5	230V	-25-40	1.4
IND1LS5DS	Indulux LED D/S 230V Slave	220-240 AC/DC 0-60Hz	2 x LED 4W	800	14 / 13	230V	-25-40	1.4
IND1LS5DSLTC	Indulux LED D/S 230V LTC	220-240 AC 50/60Hz	2 x LED 4W	800	14 / 13	230V	-25-40	1.4
IND1LSLTC	Indulux LED S/S 230V LTC	220-240 AC 50/60Hz	1 x LED 4W	400	7 / 6.5	230V	-25-40	1.4
IND3LS5	Indulux LED S/S M3 ST	220-240 AC 50Hz	1 x LED 4W	200	7.5 / 3.5	3	0-40	1.6
IND3LS5DS	Indulux LED D/S M3 ST	220-240 AC 50Hz	2 x LED 4W	400	15 / 7	3	0-40	2.0

Configurable pictograms included

Accessoires

Order Code	Description
102601K	Indulux Cable Entry Cover Kit
102702K	Indulux Battery replacement

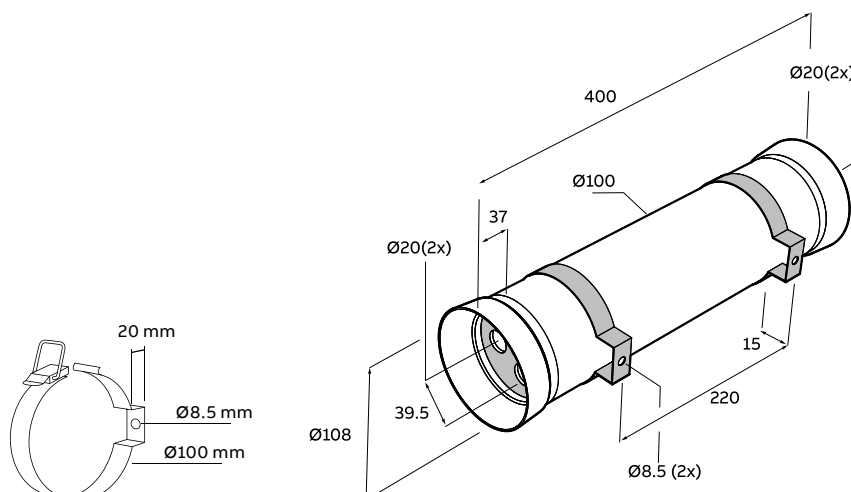




ABB UK Ltd.

Tower Court
Foleshill Enterprise Park
Courtaulds Way
Coventry CV6 5NX
UK Sales Support Tel:
+44 (0)333 999 3300
Service Enquiry Tel:
+44 (0)2476 368 511
Customer Services:
E-Mail: lv.customerservice@gb.abb.com
Technical Support:
E-Mail: LV.enquiries@gb.abb.com

emergi-lite.co.uk

