


11" x 18" PC Style Polymer Concrete (Stackable) Assembly

Dimensions / Data

Hex Head Bolts are Standard

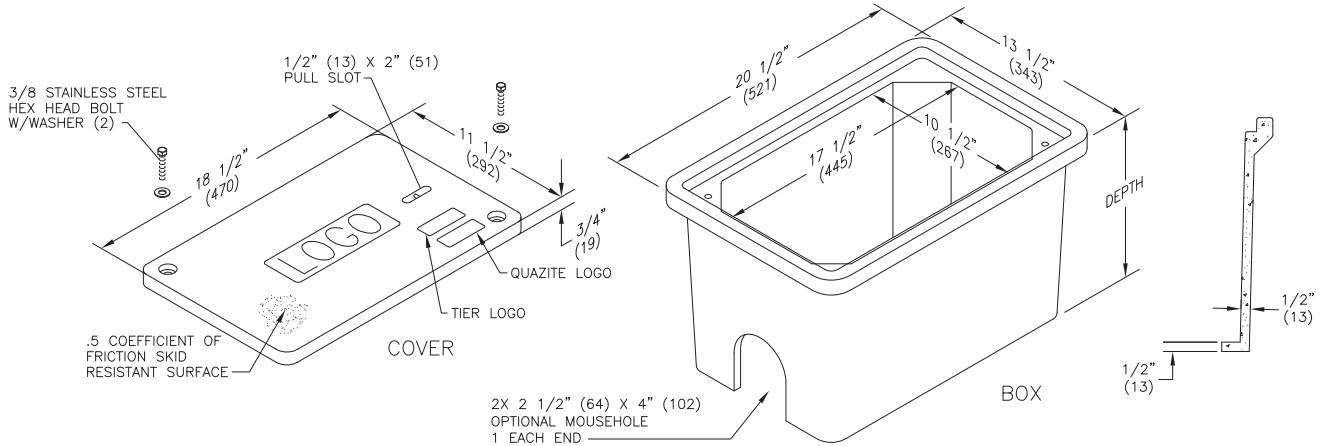

Covers

	DESCRIPTION	TIER	DESIGN / TEST LOAD #	WEIGHT #	PALLET QTY	PART NO.
UL	W/ 2 Bolts	8	8,000 / 12,000	13	40	PC1118CA00**
UL	Gasketed w/ 4 Bolts	8	8,000 / 12,000	13	40	PC1118CG00**
UL	No Bolts	8	8,000 / 12,000	13	40	PC1118WA00**

Replace ** with a logo code found on page 66.

NOTE: Gasketed covers and bolt grommets must be used with a gasketed box. Gaskets reduce the inflow of fluids but do not make the enclosure water tight.

Boxes

	DESCRIPTION	DEPTH	TIER	DESIGN / TEST LOAD #	WEIGHT #	PALLET QTY	PART NO.
UL	Standard Open Bottom	12"	8	8,000 / 12,000	37	30	PC1118BA12
UL		18"		8,000 / 12,000	53	24	PC1118BA18
UL	Solid Bottom	12 1/2"	8	8,000 / 12,000	45	30	PC1118DA12
UL		18 1/2"		8,000 / 12,000	60	24	PC1118DA18
UL	Footed Box	12 1/2"	8	8,000 / 12,000	37	30	PC1118JA12
UL		18 1/2"		8,000 / 12,000	56	24	PC1118JA18

To order boxes with two standard mouseholes, replace the letter "A" with the letter "B".

To order gasketed boxes, replace the letter "A" with the letter "G".

NOTE: Gasketed covers and bolt grommets must be used with a gasketed box. Gaskets reduce the inflow of fluids but do not make the enclosure water tight.