


Dimensions / Data

24"x 24" PG Style Polymer Concrete (Stackable) Assembly

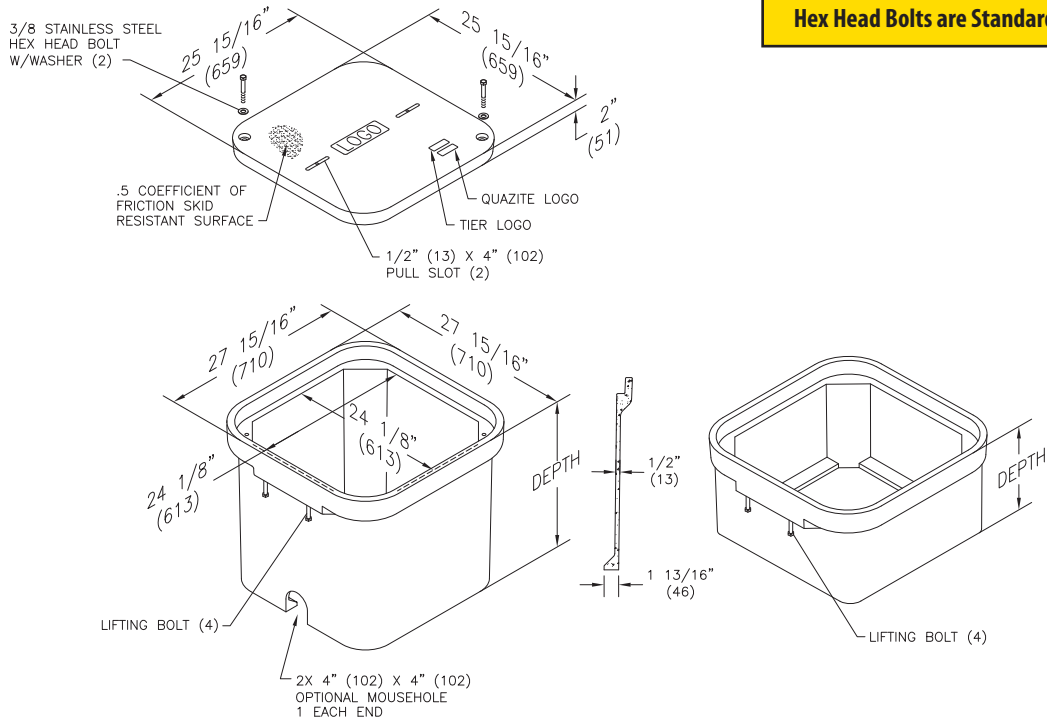

Hex Head Bolts are Standard

Covers

	DESCRIPTION	TIER	DESIGN / TEST LOAD #	WEIGHT #	PALLET QTY	PART NO.
UL	W/ 2 Bolts	8	8,000 / 12,000	70	10	PG2424CA00**
UL	W/ 2 Bolts	15	15,000 / 22,500	100	10	PG2424HA00**
UL	No Bolts	8	8,000 / 12,000	70	10	PG2424WA00**
UL	W/ 2 Bolts	22	22,500 / 33,750	100	10	PG2424HH00**

To order gasketed covers, replace the letter "A" with the letter "G".

Replace ** with a logo code found on page 60. See page 65 for meter and touch/radio read cover options.

NOTE: Gasketed covers and bolt grommets must be used with a gasketed box. Gaskets reduce the inflow of fluids but do not make the enclosure water tight.

Boxes

	DESCRIPTION	DEPTH	TIER	DESIGN / TEST LOAD #	WEIGHT #	PALLET QTY	PART NO.
UL	Standard Open Bottom	24"	22	22,500 / 33,750	165	2	PG2424BA24
UL	Solid Bottom	24 1/2"	22	22,500 / 33,750	185	2	PG2424DA24

To order boxes with 2 standard mouseholes, replace the letter "A" with the letter "B".

To order gasketed boxes, replace the letter "A" with the letter "G".

NOTE: Gasketed covers and bolt grommets must be used with a gasketed box. Gaskets reduce the inflow of fluids but do not make the enclosure water tight.

Extensions (Open bottom can be used as top or bottom, solid bottom is bottom extension only)

DESCRIPTION	DEPTH	TIER	DESIGN / TEST LOAD #	WEIGHT #	PALLET QTY	PART NO.
Open Bottom	8"	22	22,500 / 33,750	71	8	PG2424EA06
Open Bottom	14"	22	22,500 / 33,750	112	6	PG2424EA12
Solid Bottom	8 1/2"	22	22,500 / 33,750	96	8	PG2424RA06
Solid Bottom	14 1/2"	22	22,500 / 33,750	130	6	PG2424RA12