

INSTRUCTIONS FOR LED TEMP LIGHT

Item #'s 17100LEDP3 and 17150LEDP3




WARNING: RISK OF FIRE OR ELECTRIC SHOCK

Read and follow all safety instructions before using.
Failure to follow instructions could result in serious injury or death.


- Fixture must be installed and used in accordance with the NEC (National Electric Code) and all local codes.
- Ensure supply voltage is equal to the rated voltage of the fixture 120V/277V
- Fixture is rated for damp and dry locations only. Do not use where directly exposed to water.
- Do not place this fixture near a radiant heated ceiling, or any other heat source.
- Do not use in hazardous environments (e.g. corrosive gases, explosive gases, etc.).
- Always use included safety cable to securely attach fixture to a support capable of supporting at least 15 lbs.
- If using with 277V, remove the plug and wire fixture in accordance with NEC and local codes.
- Disconnect power and make sure LEDs and drivers are cool to touch before performing maintenance.

Installation diagram

Step:1

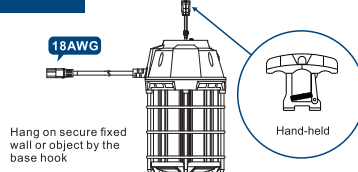


Step:2




Step:3

HOW TO REMOVE THE HANDLE

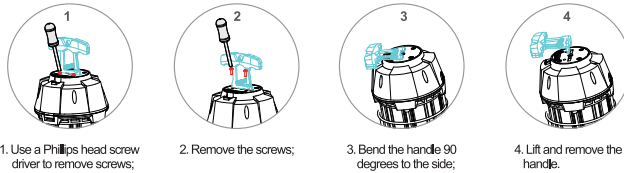


Step:4

Eyebolt installation

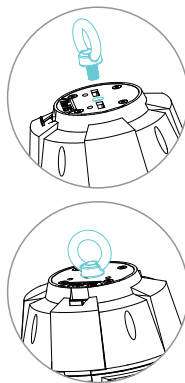


Tripod installation

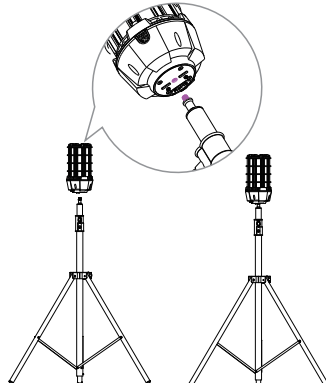

- Ambient operating temperature (-)22°F to 140°F

Electrical Parameters

Model No.	Input Wattage	Input Voltage	Weight
17100LEDP3	100	100-277VAC 50-60Hz	2.4lbs
17150LEDP3	150	100-277VAC 50-60Hz	2.7lbs

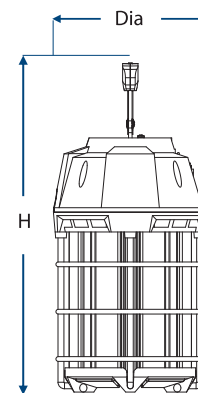

Input Wattage	Lamp Dimensions
100	Diameter 5.12" x Height 10.94"
150	Diameter 5.12" x Height 12.16"