

# SPY™ Micro-PIR detectors

Visonic Spy detectors offer an unbeatable combination of very high performance together with exceptionally inconspicuous installation. They are conveniently integrated into a wide range of security and control applications, including CCTV and access control systems. These virtually unnoticeable detectors are easily installed by flush-mounting them into a wall or ceiling.

## Benefits

- ▶ Provides inconspicuous protection for corridors, passageways and storage rooms
- ▶ Ideal for CCTV activation, access control and similar systems
- ▶ Fast and easy flush-mount installation with 3/4" drill
- ▶ Superior immunity to false alarms

## Features

- ▶ Four models provide long range, wide angle and curtain coverage
- ▶ Ultra-miniature 19mm (3/4") diameter (visible part)
- ▶ Flush-mounted in a wall or ceiling or installed from behind a wall
- ▶ Snap-fit or adjustable bracket installation options
- ▶ Alternate polarity pulse counter




## Applications:

Residential and commercial


Operating Voltage:	10 to 14 VDC
Standby Current Drain:	12.5mA at 12VDC
Alarm Output:	up to 100mA, ~18Ω ON resistance
RFI Protection:	Greater than 10V/m (up to 1000 MHz)
Operating Temperature:	0°C to 50°C (32°F to 122°F)
Dimensions:	Diameter 19mm (3/4") Length 70mm (2 3/4")

Model	Type	Catalog Number
SPY 1	Long range PIR	0-1151-0
SPY 2	Medium angle PIR	0-1152-0
SPY 3	Wide angle PIR	0-1153-0
SPY 4	Curtain PIR	0-1154-0
SPY RTE-A	Request-to-exit curtain PIR, relay output	0-1155-0
SPY RTE-B	Request-to-exit curtain PIR, open collector output	0-1156-0


SPY 1 - Long range

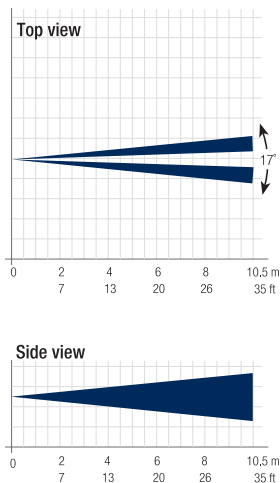


SPY 2 - Medium angle

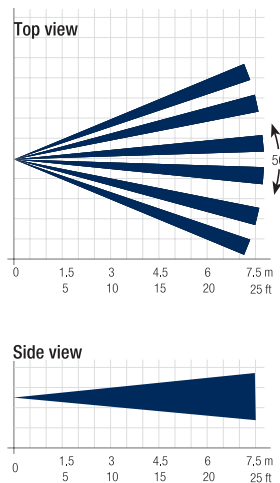

SPY 3 - Wide angle

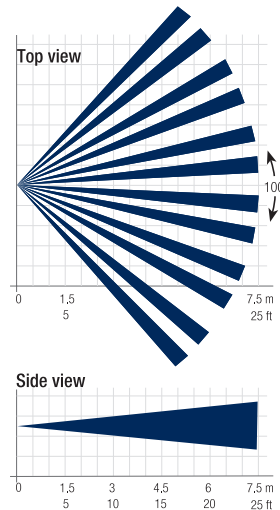

SPY 4 - Curtain

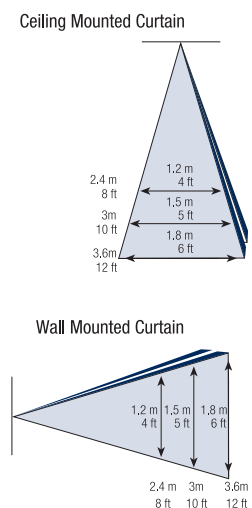

For more information visit us at: [www.visonic.com](http://www.visonic.com)

Visonic is a registered trademark of Visonic Ltd. All information correct at time of print. Visonic reserves the right to change information or specifications without notice.  
VISONIC LTD. 2005 HWDETECTORS C-800047 (Rev 00)