

Project:	Туре:
Prepared By:	Date:

Technical Specifications Performance Wattage Equivalency: Base Type: 100W Incandescent E26 Edison **Product Type:** Compliance Optical A-Line Input Wattage: **UL Listed:** Beam Angle: 14W 230° Suitable for damp locations Lumens (Nominal): **LED Characteristics Electrical** 1,500 Lm **Color Temperature: Power Factor:** Efficacy: 3000K 107 Lm/W Color Accuracy (CRI): **Operating Temperature:** L70 Lifespan: 80 CRI -20°C - 45°C (-4°F - 113°F) 11,000-Hour LED lifespan based on IES LM-70 results Construction **Bulb Shape:** A19 ECO 6PACK

Technical Specifications (continued)

Electrical

Input Voltage:

120V

Operating Frequency:

60 Hz

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of two (2) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.


Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
13.5 x 9.4 x 5.5	6

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	24	0	0	0
PALLET	2304	42.13	39.37	45.67

Dimension

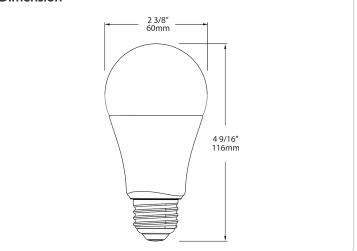

Features

Energy efficient replacement for incandescent and halogen lamps

Constructed from durable plastic which lowers risk of breakage

Rated for use in open fixtures in dry or damp locations

Frosted lens produces smooth diffuse light

 $Longer\ lifespan\ compared\ to\ legacy\ equivalents\ minimizes\ replacement\ and\ maintenance\ costs$

Contractor 6 Pack

Family	Wattage	Base Type	CRI/Color Temp	Dimmable	Pack
A19 -	- 13.5 –	E26 -	830	ND ECO	6PK
	8.5 = 8.5W 10 = 10W 13.5 = 13.5W	E26 = E26 Base	850 = 80 CRI, 5000K 840 = 80 CRI, 4000K 830 = 80 CRI, 3000K	ND ECO = Non Dimming, Economy DIM = Dimmable	6PK = 6PK