

### Product family features

- Can be used in conjunction with the following dimmer(s) and switch(es): Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark®, Skylark Contour™
- All Lutron® wallplates are screwless, seamless and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in designer style opening
- Blank inserts available for Gloss colors (DV-BI-) and Satin colors (SC-BI-)
- Customize your designer wallplate with engraving, contact customer service to get started at 1.888.LUTRON1

### Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging), see pg. 170
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pg. 172

**Available finishes**

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss finishes



**WH**  
White

**LA**  
Light Almond

**AL**  
Almond


**IV**  
Ivory

**GR**  
Gray

**BR**  
Brown

**BL**  
Black

Satin finishes

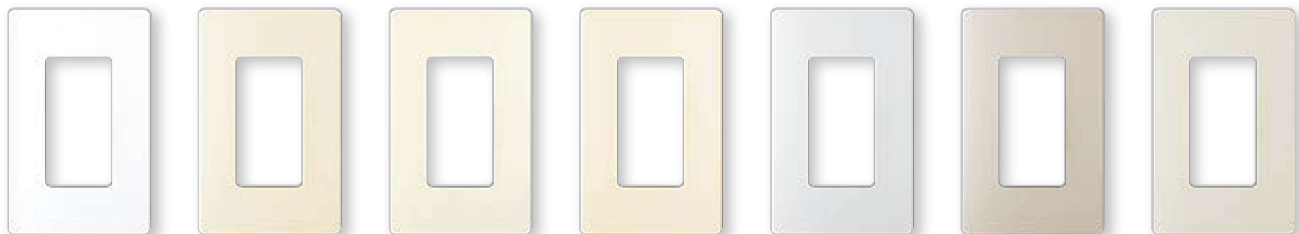

**SW**  
Snow

**LS**  
Limestone


**BI**  
Biscuit

**ES**  
Eggshell

**PD**  
Palladium

**TP**  
Taupe

**ST**  
Stone

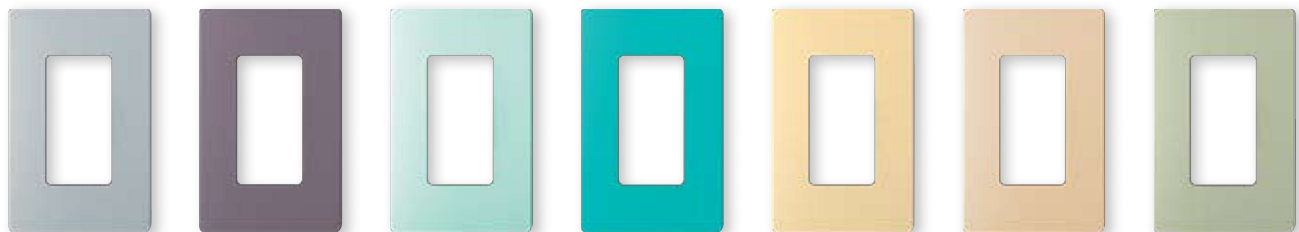

**BG**  
Bluestone

**PL**  
Plum

**SG**  
Sea Glass

**TQ**  
Turquoise

**GS**  
Goldstone

**DS**  
Desert Stone

**GB**  
Greenbriar



**MS**  
Mocha Stone

**TC**  
Terracotta

**SI**  
Sienna

**HT**  
Hot

**MR**  
Merlot

**MN**  
Midnight

**SS**  
Stainless Steel\*

\*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Wallplates for Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark® and Skylark Contour™**



1-gang\*

CW-1-**CC**<sup>2</sup>  
SC-1-**CC**<sup>4</sup>


W: 2.94 in (75 mm); H: 4.69 in (119 mm)  
D: .30 in (7.6 mm)



4-gang\*

CW-4-**CC**<sup>2</sup>  
SC-4-**CC**<sup>4</sup>

W: 8.37 in (213 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)



2-gang\*

CW-2-**CC**<sup>2</sup>  
SC-2-**CC**<sup>4</sup>

W: 4.75 in (121 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)



5-gang\*

CW-5-**CC**<sup>2</sup>  
SC-5-**CC**<sup>4</sup>

W: 10.18 in (259 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)



3-gang\*

CW-3-**CC**<sup>2</sup>  
SC-3-**CC**<sup>4</sup>

W: 6.56 in (167 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).

**CC**<sup>2</sup>: Gloss and Stainless Steel color codes, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

Multi-gang dimmer installations may require derating, see pg. 170.

\*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.



6-gang\*

CW-6-**CC**<sup>2</sup>  
SC-6-**CC**<sup>4</sup>

W: 12.00in (305mm); H: 4.69in (119mm);  
D: .30in (7.6mm)

### Cable jacks



- F-style, 75-Ohm coaxial cable

Single cable jack\*

CA-CJH-**CC**<sup>3</sup>  
SC-CJ-**CC**<sup>4</sup>

### Telephone jacks



- 6-conductor telephone jack, RJ11

Single telephone jack\*

CA-PJH-**CC**<sup>3</sup>  
SC-PJ-**CC**<sup>4</sup>

**CC**<sup>2</sup>: Gloss and Stainless Steel color codes, see pg. 161

**CC**<sup>3</sup>: Gloss color codes, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

### Receptacles



Tamper resistant receptacles

15A, 125V*	CARS-15-TR- <b>CC</b> <sup>3</sup> SCRS-15-TR- <b>CC</b> <sup>4</sup>
20A, 125V*	SCRS-20-TR- <b>CC</b> <sup>4</sup>

Receptacles

15A, 125V*	CAR-15H- <b>CC</b> <sup>3</sup> SCR-15- <b>CC</b> <sup>4</sup>
20A, 125V*	SCR-20- <b>CC</b> <sup>4</sup>

### GFCI Receptacles



- Press test button to confirm LED indicator status
- Press reset button to reset GFCI after circuit interruption

Tamper resistant GFCI receptacles

15A, 125V*	GFCI	CAR-15-GFTR- <b>CC</b> <sup>3</sup> SCR-15-GFTR- <b>CC</b> <sup>4</sup>
20A, 125V*	GFCI	SCR-20-GFTR- <b>CC</b> <sup>4</sup>

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Receptacles for dimming use**



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use

**Duplex for dimming use**

15A	120/125V*	CAR-15-DFDU- <b>CC</b> <sup>2</sup>
15A	120/125V*	SCR-15-DFDU- <b>CC</b> <sup>4</sup>
20A	120/125V*	CAR-20-DFDU- <b>CC</b> <sup>2</sup>
20A	120/125V*	SCR-20-DFDU- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs

**Split duplex (half for dimming use)**

15A	120/125V*	CAR-15-HFDU- <b>CC</b> <sup>2</sup>
15A	120/125V*	SCR-15-HFDU- <b>CC</b> <sup>4</sup>
20A	120/125V*	CAR-20-HFDU- <b>CC</b> <sup>2</sup>
20A	120/125V*	SCR-20-HFDU- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15A model shown
- Tamper resistant shutter mechanism

**Dual dimming tamper resistant**

15A	120/125V*	CAR-15-DDTR- <b>CC</b> <sup>2</sup>
15A	120/125V*	SCR-15-DDTR- <b>CC</b> <sup>4</sup>
20A	120/125V*	CAR-20-DDTR- <b>CC</b> <sup>2</sup>
20A	120/125V*	SCR-20-DDTR- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15A model shown
- Tamper resistant shutter mechanism

**Half dimming tamper resistant**

15A	120/125V*	CAR-15-HDTR- <b>CC</b> <sup>2</sup>
15A	120/125V*	SCR-15-HDTR- <b>CC</b> <sup>4</sup>
20A	120/125V*	CAR-20-HDTR- <b>CC</b> <sup>2</sup>
20A	120/125V*	SCR-20-HDTR- <b>CC</b> <sup>4</sup>

**CC**<sup>2</sup>: Gloss color code and Stainless Steel, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Replacement plug for dimming**  
(use with receptacles on left)



- This plug required for use with Lutron® receptacles for dimming use—plug will work in standard receptacle
- Easily replaces the existing plugs on lamps

120/125V White	RP-FDU-10-WH
120/125V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals.

**Important notes**

- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- Receptacles and plugs for dimming use are UL listed for use with all Lutron® wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- For detailed information, see Application Notes #91 (Guide to Dimming Table Lamps) and #109 (Guide to Dimming Portable Lamps via Receptacles) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).

**CC**<sup>2</sup>: Gloss color code and Stainless Steel, see pg. 161  
**CC**<sup>4</sup>: Satin color codes, see pg. 161

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Field customizable 6-port frame**




- Shipped with six blanks in matching colors
- Connectors and wallplate sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted





6-port frame*	CA-6PF- <b>CC</b> <sup>3</sup> SC-6PF- <b>CC</b> <sup>4</sup>
---------------	--

**Connectors for 6-port frame**

**Telephone/network jacks**

 8-conductor, RJ45 category 3	CON-1P-C3- <b>EE</b> <sup>4</sup>
8-conductor, RJ45 category 5e	CON-1P-C5E- <b>EE</b> <sup>4</sup>
8-conductor, RJ45 category 6	CON-1P-C6- <b>EE</b> <sup>4</sup>


**Fiber jacks**

 MT-RJ feed through	CON-1F-MTRJ-WH
 SC simplex	CON-1F-SC-WH
 LC non-flush mount	CON-1F-LC-WH
 ST style	CON-1F-ST-WH

**Cable jack**

 F-style, 75-Ohm coaxial cable	CON-1C- <b>EE</b> <sup>4</sup>
---	--------------------------------

**BNC jack**

 BNC connector, 50-Ohm	CON-1B-WH
---	-----------

Connectors only for use with 6-port frame.

**Switches**



- Paddle turns on/off
- Use with any 15 A load
- General purpose switching of all sources and motor loads
- No derating if ganged

**General purpose switches (120/277 V)**

Single-pole	15 A*	CA-1PSH- <b>CC</b> <sup>3</sup> SC-1PS- <b>CC</b> <sup>4</sup>
3-way	15 A*	CA-3PSH- <b>CC</b> <sup>3</sup> SC-3PS- <b>CC</b> <sup>4</sup>
4-way	15 A*	CA-4PSH- <b>CC</b> <sup>3</sup> SC-4PS- <b>CC</b> <sup>4</sup>

**General purpose switch with locator light (120V only)**

Single-pole	15 A*	CA-1PSNL- <b>EE</b> <sup>2</sup> SC-1PSNL- <b>EE</b> <sup>10</sup>
3-way	15 A*	CA-3PSNL- <b>EE</b> <sup>2</sup> SC-3PSNL- <b>EE</b> <sup>10</sup>
4-way	15 A*	CA-4PSNL- <b>EE</b> <sup>2</sup> SC-4PSNL- <b>EE</b> <sup>10</sup>

**CC**<sup>3</sup>: Gloss color codes, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

**EE**<sup>2</sup>: Only available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)

**EE**<sup>4</sup>: Only available in White (WH) and Black (BL)

**EE**<sup>10</sup>: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW)

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.